




OIL ANALYSIS REPORT

Sample Rating Trend

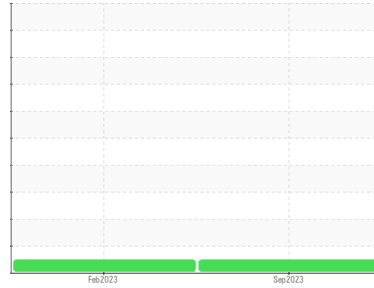

NORMAL



Machine Id
TRUCK 217

Component
Diesel Engine

Fluid
TRC MOLY XL PRO-SPEC IV 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TR0000939	TR05782584	---
Sample Date	Client Info			29 Sep 2023	23 Feb 2023	---
Machine Age	mls	Client Info		288877	282345	---
Oil Age	mls	Client Info		14339	7867	---
Oil Changed	Client Info			N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<1.0	<1.0	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	51	48	---
Chromium	ppm	ASTM D5185m	>20	2	1	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m	>2	<1	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	6	4	---
Lead	ppm	ASTM D5185m	>40	1	1	---
Copper	ppm	ASTM D5185m	>330	3	<1	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
Cadmium	ppm	ASTM D5185m		<1	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		116	110	---
Manganese	ppm	ASTM D5185m		1	1	---
Magnesium	ppm	ASTM D5185m		37	35	---
Calcium	ppm	ASTM D5185m	1300	4486	4638	---
Phosphorus	ppm	ASTM D5185m		938	859	---
Zinc	ppm	ASTM D5185m	1300	1152	1077	---
Sulfur	ppm	ASTM D5185m		4221	4633	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	12	---
Sodium	ppm	ASTM D5185m		3	2	---
Potassium	ppm	ASTM D5185m	>20	13	5	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	12.1	10.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.2	21.6	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.6	11.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	14	13.13	14.70	---











OIL ANALYSIS REPORT

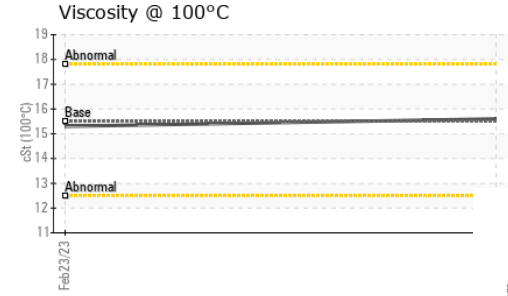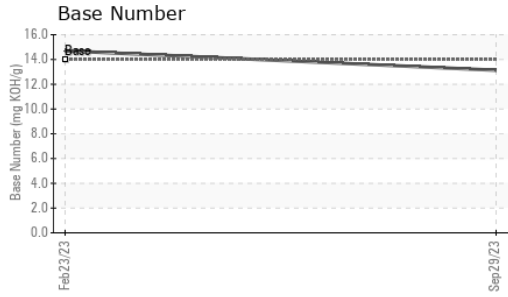

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	15.6	15.3	---

GRAPHS

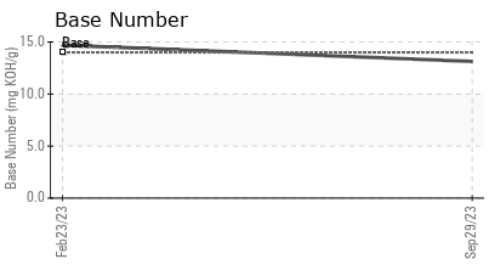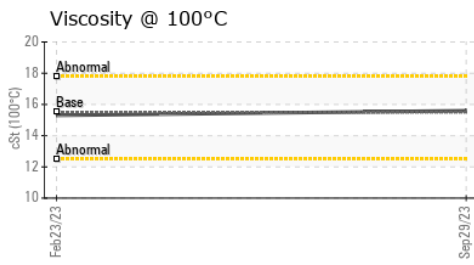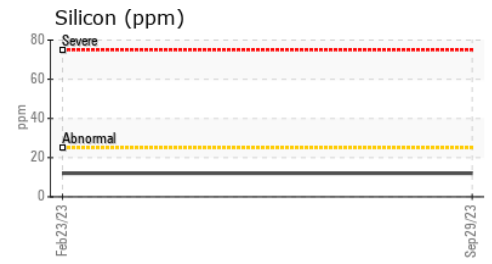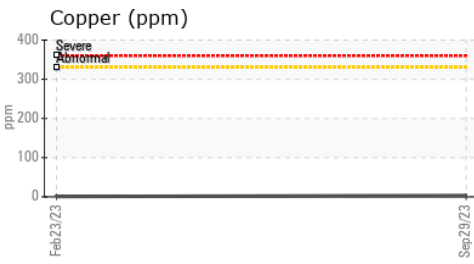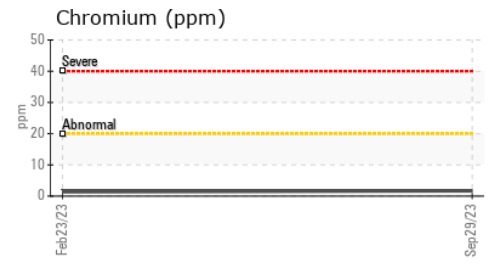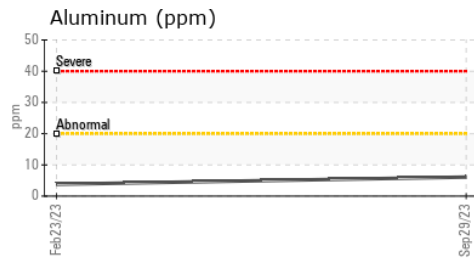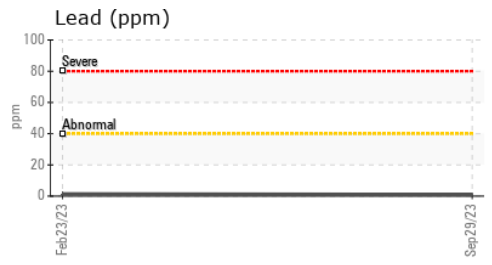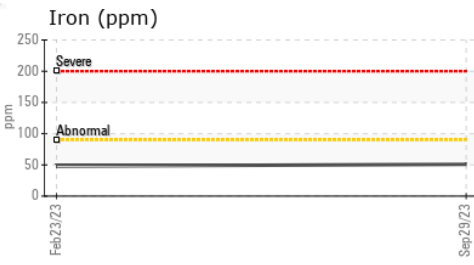

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR0000939 **Received** : 04 Oct 2023
Lab Number : **05969094** **Diagnosed** : 05 Oct 2023
Unique Number : 10675645 **Diagnostician** : Wes Davis
Test Package : MOB 2

DIETERMAN FARM SERVICES
 11038 S BURKETT RD
 MARION, MI
 US 49665
 Contact: DALE DIETERMAN
 dietermanfarmservices@hotmail.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)