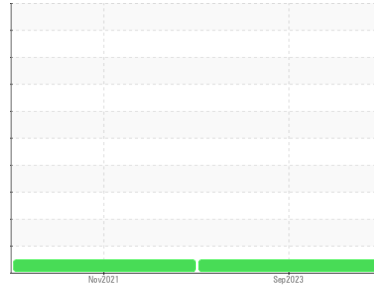


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Machine Id  
**JOHN DEERE 848L 1DW848LBLMF710505**  
 Component  
**Front Differential**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- QTS)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0179437</b>	JR0107091	---
Sample Date	Client Info		<b>29 Sep 2023</b>	05 Nov 2021	---
Machine Age	hrs	Client Info	<b>4185</b>	551	---
Oil Age	hrs	Client Info	<b>0</b>	551	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

**WEAR METALS**

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>12</b>	16	---
Iron	ppm	ASTM D5185m >500	<b>19</b>	14	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>7</b>	<1	---
Lead	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m >100	<b>2</b>	2	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185m >5	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 6	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>1</b>	3	---
Magnesium	ppm	ASTM D5185m 145	<b>102</b>	105	---
Calcium	ppm	ASTM D5185m 3570	<b>3549</b>	3527	---
Phosphorus	ppm	ASTM D5185m 1290	<b>1106</b>	1058	---
Zinc	ppm	ASTM D5185m 1640	<b>1312</b>	1257	---
Sulfur	ppm	ASTM D5185m	<b>3852</b>	3226	---



**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>4</b>	3	---
Sodium	ppm	ASTM D5185m	<b>2</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---

**VISUAL**

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	VLITE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---





# OIL ANALYSIS REPORT

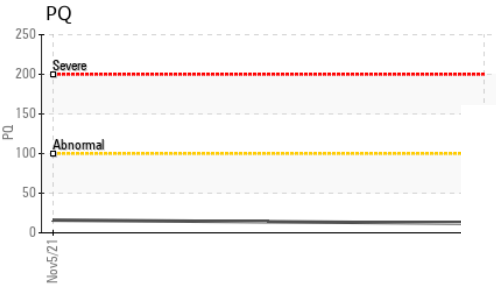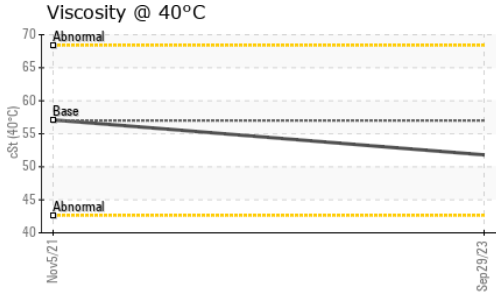

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.8</b>	57.1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

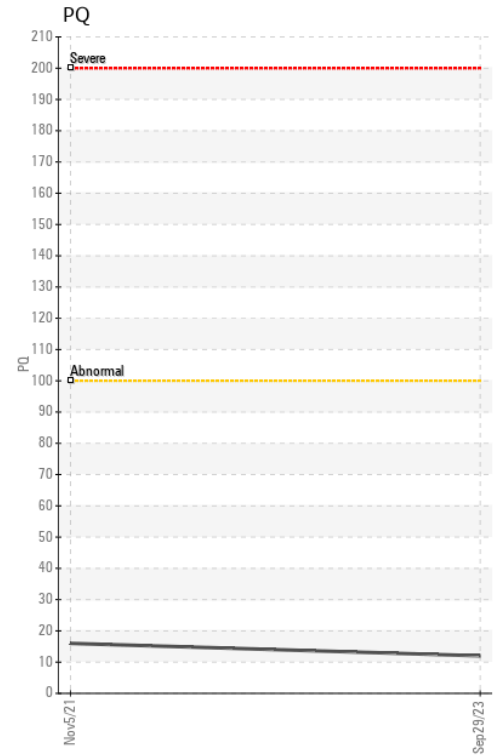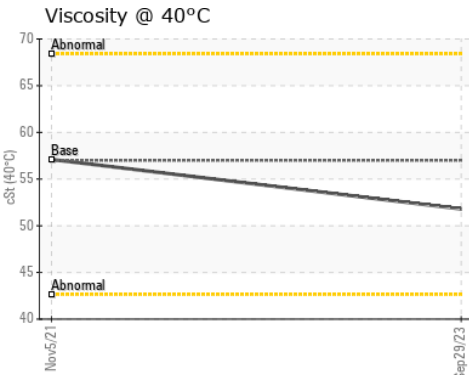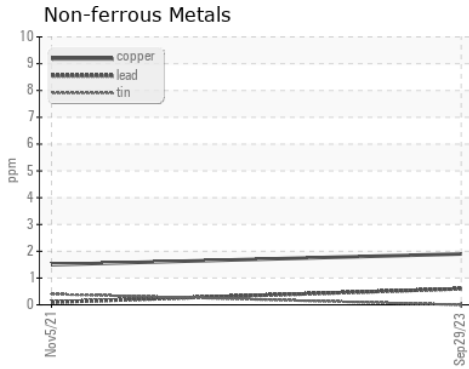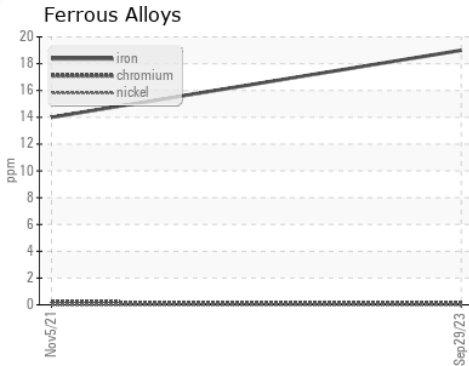

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0179437      **Received** : 04 Oct 2023  
**Lab Number** : 05969211      **Diagnosed** : 06 Oct 2023  
**Unique Number** : 10675762      **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)