

OIL ANALYSIS REPORT

R-507 83VC71

Component

Refrigeration Compressor

NOT GIVEN (--- GAL)

Sample Rating Trend



Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The condition of the oil is suitable for further service.

			Nov2019	0ct2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0857841	WC0403214	
Sample Date		Client Info		03 Oct 2023	19 Nov 2019	
Machine Age	hrs	Client Info		36117	20077	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Not Changd	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	21	8	
Chromium	ppm	ASTM D5185m	>2	0	<1	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>3	<1	<1	
Lead	ppm	ASTM D5185m	>2	0	0	
Copper	ppm	ASTM D5185m	>8	0	<1	
Tin	ppm	ASTM D5185m	>4	0	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		0	<1	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m		0	0	
Calcium	ppm	ASTM D5185m		0	0	
Phosphorus	ppm	ASTM D5185m		3	3	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m		0	0	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	6	4	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	
Water	%	ASTM D6304	>0.01	0.007	0.009	
ppm Water	ppm	ASTM D6304	>100	75.8	93.4	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	4273	3393	
Particles >6µm		ASTM D7647	>2500	643	273	
Particles >14μm		ASTM D7647	>320	19	27	
Particles >21µm		ASTM D7647	>80	6	9	
Particles >38µm		ASTM D7647	>20	1	2	
Particles >71μm		ASTM D7647	>4	1	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/11	19/15/12	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2


Acid Number (AN)


mg KOH/g ASTM D974

0.007 Contact/Location: CODY BASS - TALCLA



OIL ANALYSIS REPORT

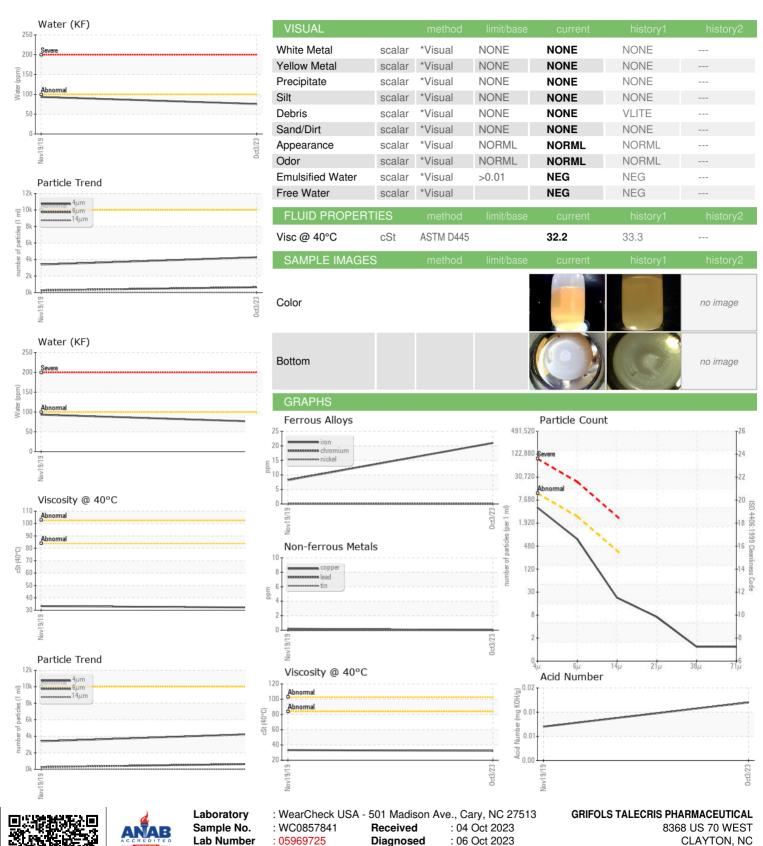



Certificate L2367

Unique Number

: 10676276

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician

: Doug Bogart

Contact/Location: CODY BASS - TALCLA

US 27520

T:

Contact: CODY BASS

cody.bass@grifols.com

F: (919)359-4767