




PROBLEM SUMMARY

Sample Rating Trend

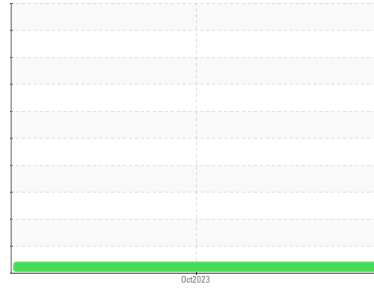


VISCOSITY



Area
Store 2 - Beaver [RO#144024]
 Machine Id
JOHN DEERE 460E 1DW460ETCKF697683
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (11 GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

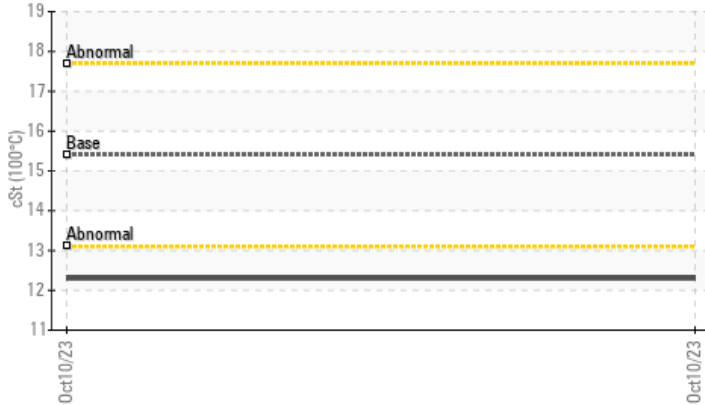

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | ATTENTION | --- | --- |
|---------------|-----|-----------|------|-----------|-----|-----|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 12.3 | --- | --- |

Customer Id: LESMAROH
 Sample No.: LEC0043473
 Lab Number: 05978049
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area
Store 2 - Beaver [RO#144024]
 Machine Id
JOHN DEERE 460E 1DW460ETCKF697683
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (11 GAL)

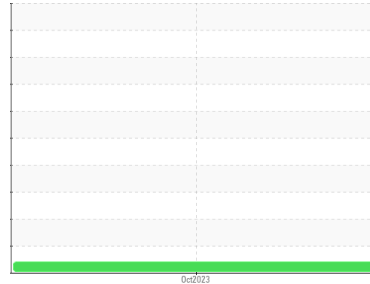

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info | LEC0043473 | --- | --- |
| Sample Date | Client Info | 10 Oct 2023 | --- | --- |
| Machine Age | hrs Client Info | 8166 | --- | --- |
| Oil Age | hrs Client Info | 166 | --- | --- |
| Oil Changed | Client Info | Not Chngd | --- | --- |
| Sample Status | | ATTENTION | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|------------|----------|----------|
| Glycol | WC Method | NEG | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|---------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >51 | 9 | --- | --- |
| Chromium | ppm ASTM D5185m >11 | <1 | --- | --- |
| Nickel | ppm ASTM D5185m >5 | 1 | --- | --- |
| Titanium | ppm ASTM D5185m | <1 | --- | --- |
| Silver | ppm ASTM D5185m >3 | 0 | --- | --- |
| Aluminum | ppm ASTM D5185m >31 | 4 | --- | --- |
| Lead | ppm ASTM D5185m >26 | 2 | --- | --- |
| Copper | ppm ASTM D5185m >26 | 3 | --- | --- |
| Tin | ppm ASTM D5185m >4 | 1 | --- | --- |
| Vanadium | ppm ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm ASTM D5185m | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|-----------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m | 2 | --- | --- |
| Barium | ppm ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm ASTM D5185m | 59 | --- | --- |
| Manganese | ppm ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm ASTM D5185m | 521 | --- | --- |
| Calcium | ppm ASTM D5185m | 1548 | --- | --- |
| Phosphorus | ppm ASTM D5185m | 1040 | --- | --- |
| Zinc | ppm ASTM D5185m | 1263 | --- | --- |
| Sulfur | ppm ASTM D5185m | 3211 | --- | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|----------------------|------------|----------|----------|
| Silicon | ppm ASTM D5185m >120 | 4 | --- | --- |
| Sodium | ppm ASTM D5185m >31 | 13 | --- | --- |
| Potassium | ppm ASTM D5185m >20 | 9 | --- | --- |
| Fuel | % ASTM D3524 >8.0 | 1.2 | --- | --- |




INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.2 | --- | --- |
| Nitration | Abs/cm *ASTM D7624 >20 | 7.0 | --- | --- |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 19.0 | --- | --- |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 14.4 | --- | --- |
| Base Number (BN) | mg KOH/g ASTM D2896 13.6 | 8.4 | --- | --- |





OIL ANALYSIS REPORT

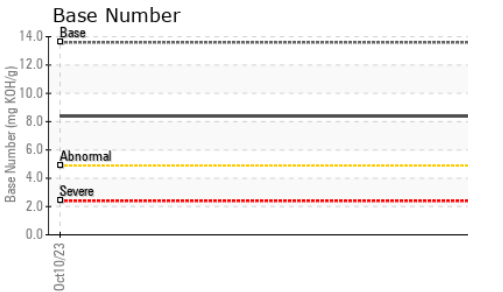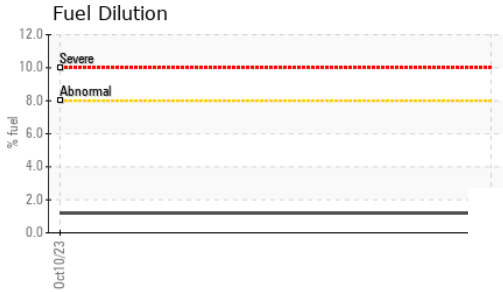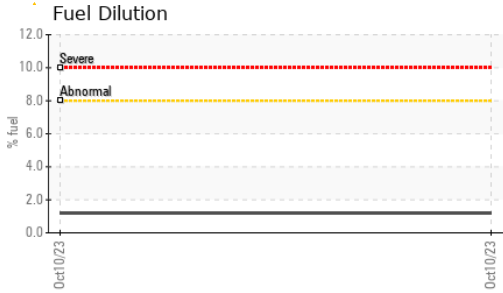

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 12.3 | --- |

GRAPHS

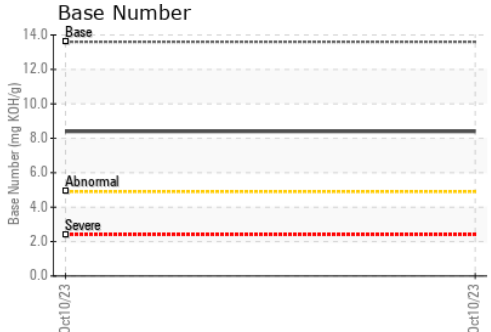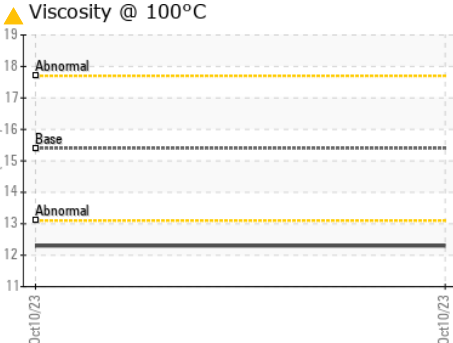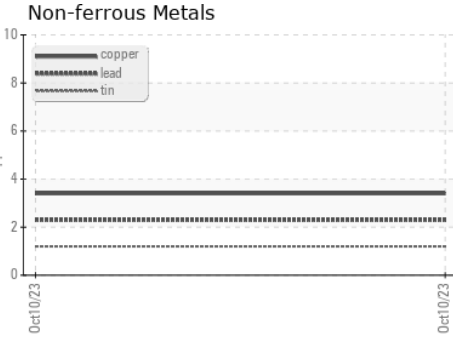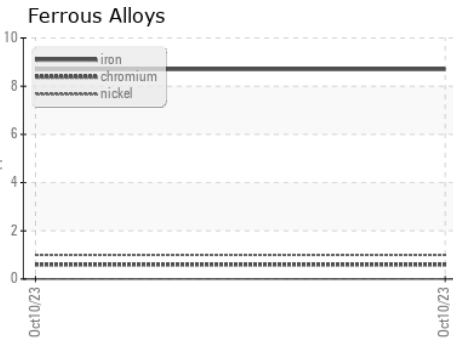

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0043473 **Received** : 13 Oct 2023
Lab Number : 05978049 **Diagnosed** : 16 Oct 2023
Unique Number : 10695344 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendallLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (740)373-5570