

COOLANT REPORT

Sample Rating Trend





Component **Jacket Water Coolant**

Machine Id


Fluid

CHEVRON HEAVY DUTY PF COOLANT (--- GAL)


| | | | | - | May2021 Oct2021 Oct2022 Apr2 | | |
|---|------------------------|------------|-------------|------------|------------------------------|-------------|-------------|
| DIAGNOSIS | SAMPLE INFORI | MATION | method | limit/base | current | history1 | history2 |
| Recommendation | Sample Number | | Client Info | | WC0724858 | WC0724830 | WC0724882 |
| he fluid is suitable for further service. | Sample Date | | Client Info | | 11 Oct 2023 | 04 Apr 2023 | 12 Oct 2022 |
| orrosion | Machine Age | hrs | Client Info | | 62809 | 61920 | 61065 |
| Il metal levels are normal indicating no corrosion | Oil Age | hrs | Client Info | | 62809 | 61920 | 61065 |
| the cooling system. | Oil Changed | | Client Info | | Not Changd | N/A | Not Changd |
| ontaminants | Sample Status | | | | NORMAL | NORMAL | NORMAL |
| here is no indication of any contamination in the polant. | PHYSICAL TEST I | RESULTS | s method | limit/base | current | history1 | history2 |
| oolant Condition | Specific Gravity | | *ASTM D1298 | | 1.059 | 1.059 | 1.059 |
| lycol and nitrite levels are acceptable. The pH | рН | Scale 0-14 | ASTM D1287 | 10.5 | 8.44 | 8.57 | 8.77 |
| level of this fluid is within the acceptable limits. | Nitrites | ppm | AP-053:2009 | >800 | 936 | 1012 | 1124 |
| | Reserve Alkalinity | Scale 0-20 | *ASTM D1121 | | | | |
| | Percentage Glycol | % | ASTM D3321 | 50 | 43.2 | 43.2 | 43.2 |
| | Freezing Point | °F | ASTM D3321 | -37 | -19 | -19 | -19 |
| | Total Dissolved Solids | | | | 200.5 | 216.5 | 214.0 |
| | Carboxylate | | | | n/a | fail | n/a |
| | CORROSION INF | IIBITORS | 6 method | limit/base | current | history1 | history2 |
| | Silicon | ppm | ASTM D6130 | 1000 | 35 | 108 | 125 |
| | Phosphorus | ppm | ASTM D6130 | 0 | 5 | 19 | 0 |
| | Boron | ppm | ASTM D6130 | | 284 | 575 | 566 |
| | Molybdenum | ppm | ASTM D6130 | | 183 | 347 | 352 |
| | CORROSION | | method | limit/base | current | history1 | history2 |
| | Iron | ppm | ASTM D6130 | >15 | 0 | 1 | 0 |
| | Aluminum | ppm | ASTM D6130 | >10 | <1 | 0 | 0 |
| | Copper | ppm | ASTM D6130 | >10 | 0 | 2 | 1 |
| | Lead | ppm | ASTM D6130 | >10 | 0 | <1 | 0 |
| | Tin | ppm | ASTM D6130 | >10 | 0 | 0 | 0 |
| | Zinc | ppm | ASTM D6130 | | 0 | 0 | 0 |
| | CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
| | Chlorine | ppm | ASTM D6130 | | 0 | 24 | 0 |
| | CARRIER SALTS | \$ | method | limit/base | current | history1 | history2 |
| | Sodium | ppm | ASTM D6130 | | 1748 | 2958 | 2960 |
| | Potassium | ppm | ASTM D6130 | | 18 | 116 | 93 |
| | SCALE POTENT | IAL | method | limit/base | current | history1 | history2 |
| | Calcium | ppm | ASTM D6130 | | <1 | 2 | <1 |
| | Magnesium | ppm | ASTM D6130 | | <1 | <1 | 0 |



COOLANT REPORT

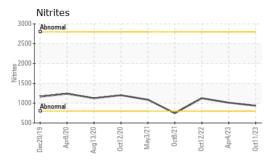



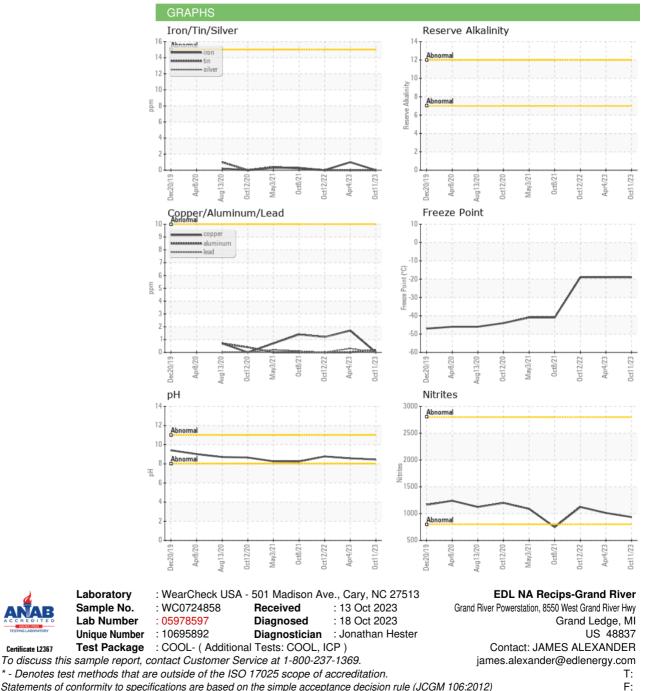

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)