


OIL ANALYSIS REPORT



Bernardsville **MACK 1312**

Component **Diesel Engine**

GIBRALTAR 15W/40 SUPER S-3 LX (11 GAL)





Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

or Lit 3-3 LX (I	i GAL)			Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0830895		
Sample Date		Client Info		28 Sep 2023		
Machine Age	hrs	Client Info		35442		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Fuel		WC Method	>3.0	<1.0		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>120	38		
Chromium	ppm	ASTM D5185m	>20	1		
Nickel	ppm	ASTM D5185m	>5	<1		
Titanium	ppm	ASTM D5185m	>2	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>20	3		
_ead	ppm	ASTM D5185m	>40	4		
Copper	ppm	ASTM D5185m	>330	2		
Γin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		10		
Barium	ppm	ASTM D5185m		12		
Molybdenum	ppm	ASTM D5185m	66	61		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	1000	805		
Calcium	ppm	ASTM D5185m	1050	1197		
Phosphorus	ppm	ASTM D5185m	1150	990		
Zinc	ppm	ASTM D5185m	1270	1208		
Sulfur	ppm	ASTM D5185m		3077		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	5		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	1.6		
Nitration	Abs/cm	*ASTM D7624	>20	9.0		
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3		
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	8.0		





OIL ANALYSIS REPORT

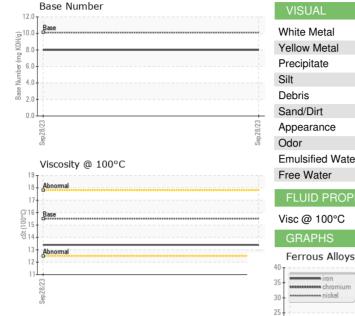



VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual		NEG		
	TIEC	us allo a al	l:: t/l		المرسمة ما	histom (O
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	13.4		

\sim	$\overline{}$		$\overline{}$		$\overline{}$
G	ᆮ	Δ	_	=1	<u>_</u>







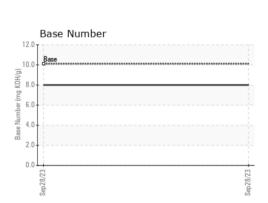





Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10695982 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0830895 : 05978687

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received

: 13 Oct 2023 Diagnosed Diagnostician : Wes Davis

: 16 Oct 2023

INTERSTATE WASTE-BERNARDSVILLE

33 OLD QUARRY ROAD BERNARDSVILLE, NJ US 07924

Contact: Pablo Chardon PChardon@interstatewaste.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: