




OIL ANALYSIS REPORT

Sample Rating Trend

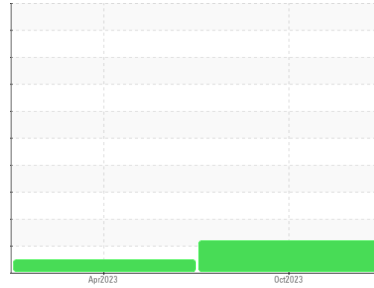

GLYCOL



Machine Id

72

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0740592	WC0740609	---
Sample Date	Client Info		12 Oct 2023	01 Apr 2023	---
Machine Age	mls	Client Info	24324	19912	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	36	13	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	9	4	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	<1	<1	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	36	36	---
Barium	ppm	ASTM D5185m	10	12	0	---
Molybdenum	ppm	ASTM D5185m	100	83	81	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	418	438	---
Calcium	ppm	ASTM D5185m	3000	1699	1871	---
Phosphorus	ppm	ASTM D5185m	1150	1031	1116	---
Zinc	ppm	ASTM D5185m	1350	1235	1352	---
Sulfur	ppm	ASTM D5185m	4250	3421	4584	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	4	2	---
Sodium	ppm	ASTM D5185m	>158	22	9	---
Potassium	ppm	ASTM D5185m	>20	▲ 65	28	---
Glycol	%	*ASTM D2982		NEG	0.0	---

INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.4	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	7.7	7.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.7	18.6	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.4	13.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.9	8.3	---











OIL ANALYSIS REPORT

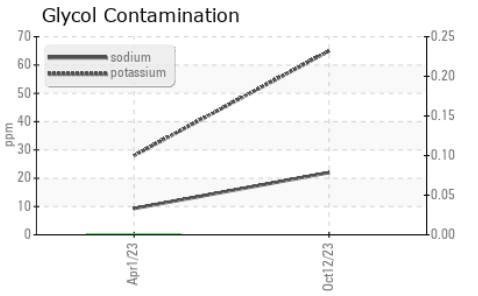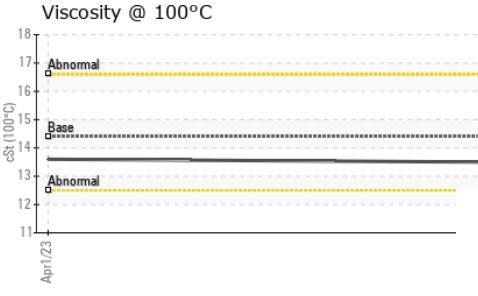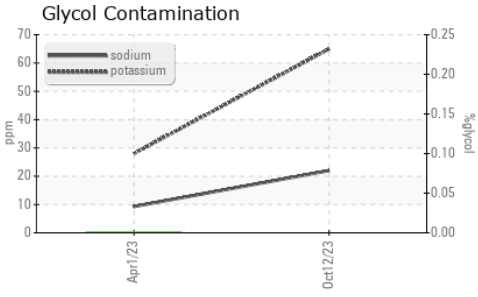

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.6

GRAPHS

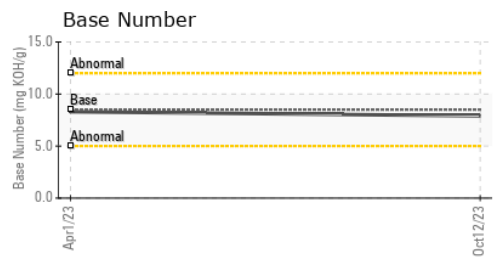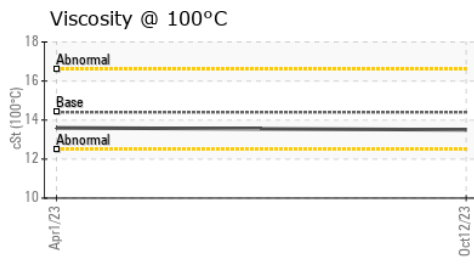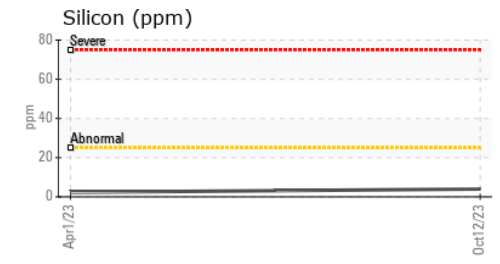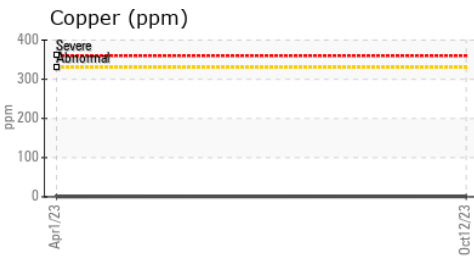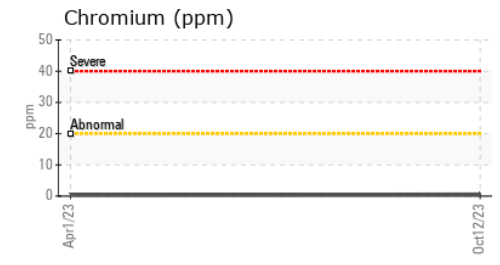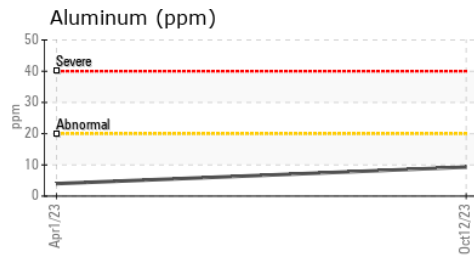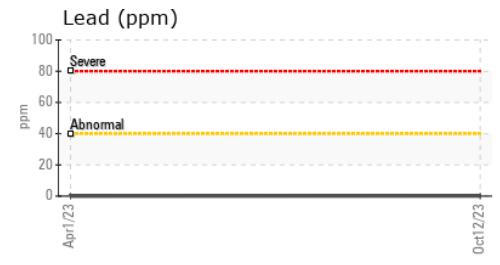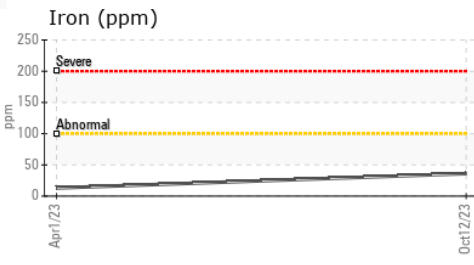

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0740592 **Received** : 13 Oct 2023
Lab Number : 05978788 **Diagnosed** : 17 Oct 2023
Unique Number : 10696083 **Diagnostician** : Jonathan Hester
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

ANSON CO SCHOOL BUS GARAGE
 89 BOGGAN CUT RD
 WADESBORO, NC
 US 28135
 Contact: MATT POWELL
 powell.berkeley@anson.k12.nc.us

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)