

# **OIL ANALYSIS REPORT**

### Area TANNER LEANDER Machine Id 17-046S14-6 PRE

Component Hydraulic System Fluid NOT GIVEN (--- QTS)

#### DIAGNOSIS

#### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

## Wear

All component wear rates are normal.

#### Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

# Fluid Condition

The AN level is at the top-end of the recommended limit.


				0ct2023		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0837657		,
Sample Date		Client Info		12 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m	>10	0		
Silver		ASTM D5185m		0		
	ppm		10	-		
Aluminum	ppm		>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm		>75	0		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		296		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		50		
Phosphorus	ppm	ASTM D5185m		1161		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		1632		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	0		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.1	<b>A</b> 0.103		
ppm Water	ppm	ASTM D6304	>1000	▲ 1036.7		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	469		
Particles >6µm		ASTM D7647	>1300	155		
Particles >14µm		ASTM D7647	>160	12		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647 ASTM D7647	>10	4 0		
Particles >71µm		ASTM D7647 ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>3 >19/17/14	0 16/14/11		
FLUID DEGRADA		method	limit/base	current	history1	history2
			mmybase			
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>4.52</b>		

Sample Rating Trend


WATER




# **OIL ANALYSIS REPORT**

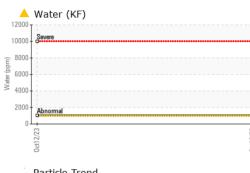



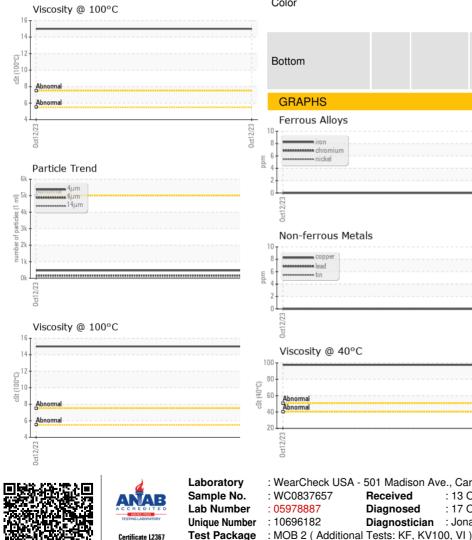

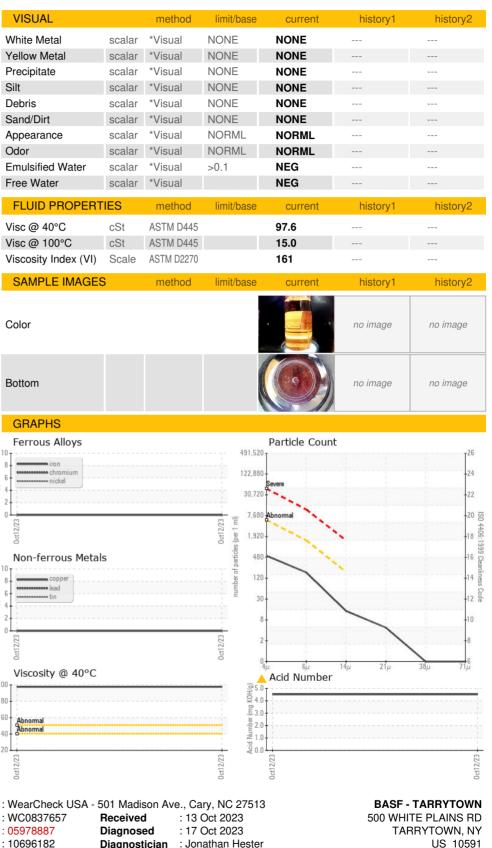

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: (914)785-2166

Т:

Contact: TANNER LEANDER

leander.tanner@basf.com