



OIL ANALYSIS REPORT


Sample Rating Trend

WATER



Area
TANNER LEANDER
Machine Id
17-046S14-3 PRE

Component
Hydraulic System
Fluid
NOT GIVEN (--- QTS)

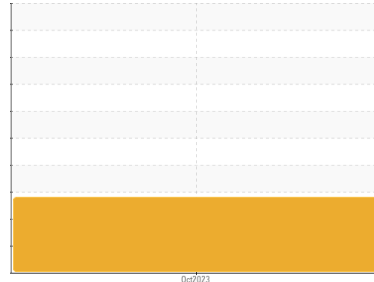

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is at the top-end of the recommended limit.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0837654	---	---
Sample Date	Client Info	12 Oct 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	0	---	---
Chromium ppm	ASTM D5185m >10	0	---	---
Nickel ppm	ASTM D5185m >10	0	---	---
Titanium ppm	ASTM D5185m	0	---	---
Silver ppm	ASTM D5185m	0	---	---
Aluminum ppm	ASTM D5185m >10	0	---	---
Lead ppm	ASTM D5185m >10	0	---	---
Copper ppm	ASTM D5185m >75	0	---	---
Tin ppm	ASTM D5185m >10	0	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	295	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	0	---	---
Manganese ppm	ASTM D5185m	<1	---	---
Magnesium ppm	ASTM D5185m	0	---	---
Calcium ppm	ASTM D5185m	45	---	---
Phosphorus ppm	ASTM D5185m	1151	---	---
Zinc ppm	ASTM D5185m	0	---	---
Sulfur ppm	ASTM D5185m	3810	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >20	0	---	---
Sodium ppm	ASTM D5185m	1	---	---
Potassium ppm	ASTM D5185m >20	<1	---	---
Water %	ASTM D6304 >0.1	▲ 0.104	---	---
ppm Water	ASTM D6304 >1000	▲ 1046.6	---	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	562	---	---
Particles >6µm	ASTM D7647 >1300	130	---	---
Particles >14µm	ASTM D7647 >160	10	---	---
Particles >21µm	ASTM D7647 >40	4	---	---
Particles >38µm	ASTM D7647 >10	0	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	16/14/10	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	▲ 4.55	---	---



OIL ANALYSIS REPORT

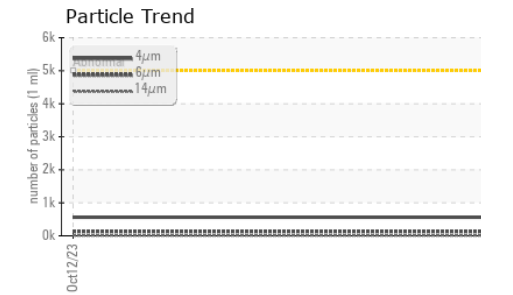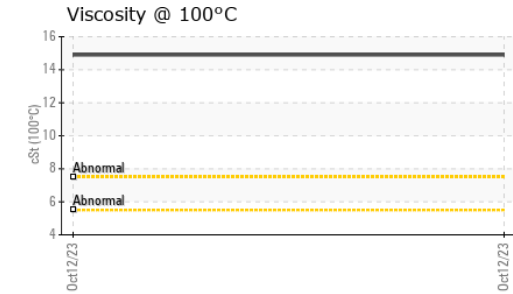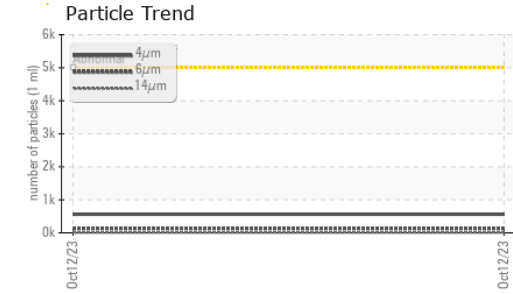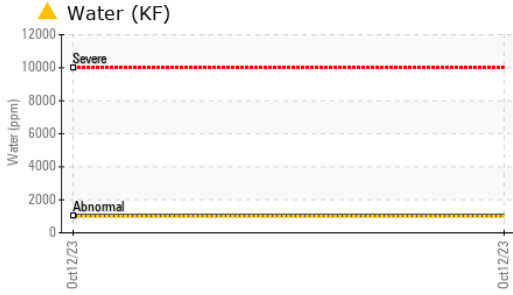




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	97.8	---	---
Visc @ 100°C	cSt	ASTM D445	14.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270	159	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

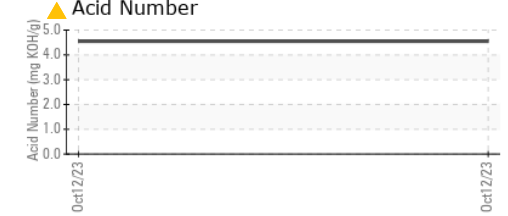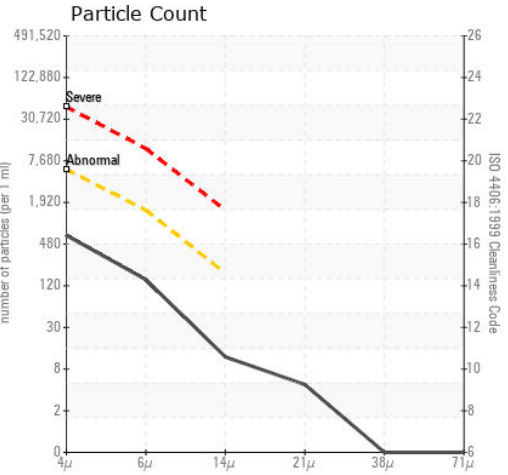

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0837654 **Received** : 13 Oct 2023
Lab Number : 05978890 **Diagnosed** : 17 Oct 2023
Unique Number : 10696185 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, VI)

BASF - TARRYTOWN
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: TANNER LEANDER
 leander.tanner@basf.com
 T:
 F: (914)785-2166

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)