


PROBLEM SUMMARY

Machine Id KAESER SM 15T 7223640 (S/N 1073) Component

Compressor



COMPONENT CONDITION SUMMARY

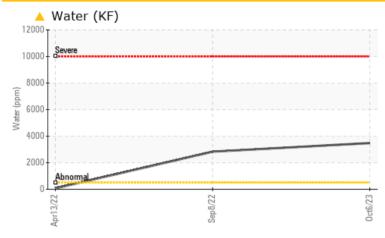

RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Water	%	ASTM D6304	>0.05	6 0.348	▲ 0.283	0.007
ppm Water	ppm	ASTM D6304	>500	A 3480	<u> </u>	72.3
Debris	scalar	*Visual	NONE	🔺 MODER	🔺 MODER	A MODER
Appearance	scalar	*Visual	NORML	🔺 HAZY	🔺 HAZY	NORML
Emulsified Water	scalar	*Visual	>0.05	<u> </u>	0.2%	NEG


Customer Id: ROCHAL Sample No.: KCPA007928 Lab Number: 05978937 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

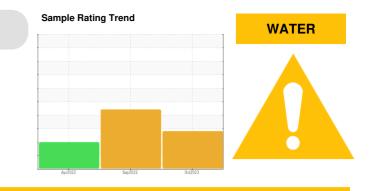

RECOMMENDED AC	RECOMMENDED ACTIONS						
Action	Status	Date	Done By				
Alert			?				

Description

We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

WATER



08 Sep 2022 Diag: Angela Borella

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. There is a light concentration of water present in the oil. Moderate concentration of visible dirt/debris present in the oil. Free water present. The condition of the oil is acceptable for the time in service.



13 Apr 2022 Diag: Don Baldridge



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Machine Id KAESER SM 15T 7223640 (S/N 1073)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear


All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.




SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007928	KCP30995	KCP44400
Sample Date		Client Info		06 Oct 2023	08 Sep 2022	13 Apr 2022
Machine Age	hrs	Client Info		20860	0	10332
Oil Age	hrs	Client Info		0	0	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	10	15	13
Tin	ppm		>10	0	0	0
Vanadium	ppm	ASTM D5185m	210	0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum		ASTM D5185m	0	0	0	0
,	ppm	ASTM D5185m	0	0 <1	0	0
Manganese	ppm		100		0	0
Magnesium	ppm	ASTM D5185m		5 2	0	0
Calcium	ppm	ASTM D5185m				2
Phosphorus	ppm	ASTM D5185m	0	<1	3	
Zinc	ppm	ASTM D5185m		6	0	0
Sulfur	ppm	ASTM D5185m	23500	16559	17007	12106
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	<1
Sodium	ppm	ASTM D5185m		2	<1	0
Potassium						
Water	ppm	ASTM D5185m	>20	0	0	0
	ppm %	ASTM D5185m ASTM D6304	>20 >0.05			
ppm Water				0	0	0
ppm Water FLUID CLEANLIN	% ppm	ASTM D6304	>0.05	0 ▲ 0.348	0 ▲ 0.283	0 0.007
	% ppm	ASTM D6304 ASTM D6304	>0.05 >500	0	0 0.283 2830	0 0.007 72.3
FLUID CLEANLIN	% ppm	ASTM D6304 ASTM D6304 method	>0.05 >500	0 ▲ 0.348 ▲ 3480 current	0 ▲ 0.283 ▲ 2830 history1	0 0.007 72.3 history2
FLUID CLEANLIN Particles >4µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	0 ▲ 0.348 ▲ 3480 current	0 ▲ 0.283 ▲ 2830 history1	0 0.007 72.3 history2 60636
FLUID CLEANLIN Particles >4µm Particles >6µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300	0 ▲ 0.348 ▲ 3480 current 	0 ▲ 0.283 ▲ 2830 history1 	0 0.007 72.3 history2 60636 ▲ 27378
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0 ▲ 0.348 ▲ 3480 current 	0 ▲ 0.283 ▲ 2830 history1 	0 0.007 72.3 history2 60636 ▲ 27378 ▲ 1048
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20	0 ▲ 0.348 ▲ 3480 <u>current</u> 	0 ▲ 0.283 ▲ 2830 ★ history1 ← ←	0 0.007 72.3 history2 60636 ▲ 27378 ▲ 1048 ▲ 253
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm	% ppm	ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0 ▲ 0.348 ▲ 3480 <u>current</u> 	0 ▲ 0.283 ▲ 2830 history1 	0 0.007 72.3 history2 60636 ▲ 27378 ▲ 1048 ▲ 253 ▲ 24
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm Particles >71μm	% ppm ESS	ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	0 ▲ 0.348 ▲ 3480 <u>current</u> 	0 ▲ 0.283 ▲ 2830 history1 	0 0.007 72.3 history2 60636 ▲ 27378 ▲ 1048 ▲ 253 ▲ 24 1


Contact/Location: C. MELLO - ROCHAL




Built for a lifetime.

OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	A MODER	A MODER	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	🔺 HAZY	🔺 HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	6.2%	0.2%	NEG
Free Water	scalar	*Visual		NEG	▲ 1.0	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.2	47.6	44.4
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

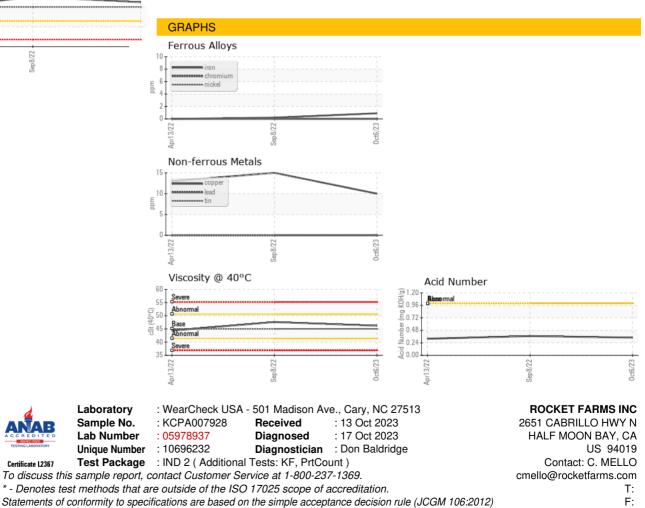



Certificate L2367

Contact/Location: C. MELLO - ROCHAL