

PROBLEM SUMMARY



Sample Rating Trend


ISO

KAESER 7964421 (S/N 1697)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

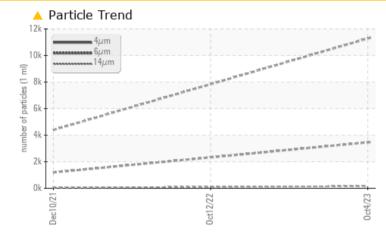

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status		ABNORMAL	NORMAL	NORMAL			
Particles >6µm	ASTM D7647 >13	00 🔺 3459		1193			
Particles >14µm	ASTM D7647 >80	🔺 157		47			
Particles >21µm	ASTM D7647 >20	<u> </u>		4			
Oil Cleanliness	ISO 4406 (c) >/	17/13 🔺 21/19/14		17/13			

Customer Id: SJOHAR Sample No.: KCPA007475 Lab Number: 05978943 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>


To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

12 Oct 2022 Diag: Jonathan Hester



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count on this sample.All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

10 Dec 2021 Diag: Jonathan Hester





Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

KAESER 7964421 (S/N 1697)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

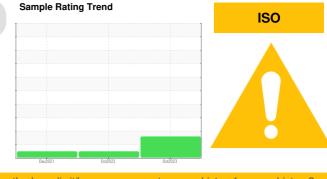

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007475	KCP46989D	KCP43994
Sample Date		Client Info		04 Oct 2023	12 Oct 2022	10 Dec 2021
Machine Age	hrs	Client Info		9740	6229	3464
Oil Age	hrs	Client Info		0	3000	3464
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	2	<1
Lead		ASTM D5185m	>10	0	0	0
	ppm	ASTM D5185m		15	17	18
Copper Tin	ppm	ASTM D5185m	>50 >10	0	<1	0
	ppm		>10			
Antimony	ppm	ASTM D5185m				<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	100	0	3	2
Calcium	ppm	ASTM D5185m	0	1	0	<1
Phosphorus	ppm	ASTM D5185m	0	<1	0	5
Zinc	ppm	ASTM D5185m	0	0	7	12
Sulfur	ppm	ASTM D5185m	23500	17297	23307	13556
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		<1	0	2
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water	%	ASTM D6304	>0.05	0.005	0.010	0.003
ppm Water	ppm	ASTM D6304	>500	55.6	107.2	29.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		11282		4393
		ASTM D7647	>1300	<u> </u>		1193
Particles >6µm						
		ASTM D7647	>80	🔺 157		47
Particles >14µm				▲ 157 ▲ 21		47
Particles >14µm Particles >21µm		ASTM D7647 ASTM D7647 ASTM D7647				
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647	>20 >4	<mark>▲</mark> 21 1		4
Particles >14μm Particles >21μm		ASTM D7647	>20 >4	<mark>/</mark> 21		4 0
Particles >14μm Particles >21μm Particles >38μm Particles >71μm		ASTM D7647 ASTM D7647 ASTM D7647	>20 >4 >3	▲ 21 1 0		4 0 0

Acid Number (AN) mg KOH/g

mg KOH/g ASTM D8045 1.0


0.46 0.47 0.352


Report Id: SJOHAR [WUSCAR] 05978943 (Generated: 10/17/2023 13:38:54) Rev: 1


Contact/Location: T. HENNING - SJOHAR


-COMPRESSORS

Built for a lifetime.



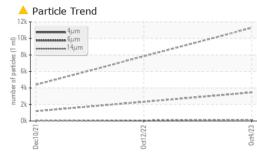

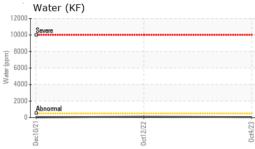

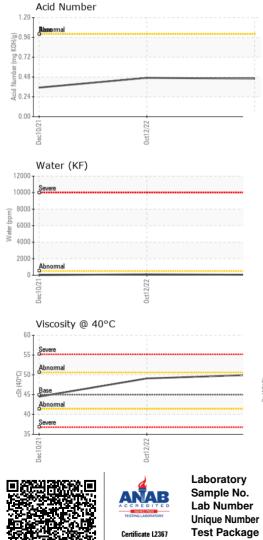


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	50.0	49.1	44.5
SAMPLE IMAGE	S	method	limit/base	current	history1	history2

Color



Bottom

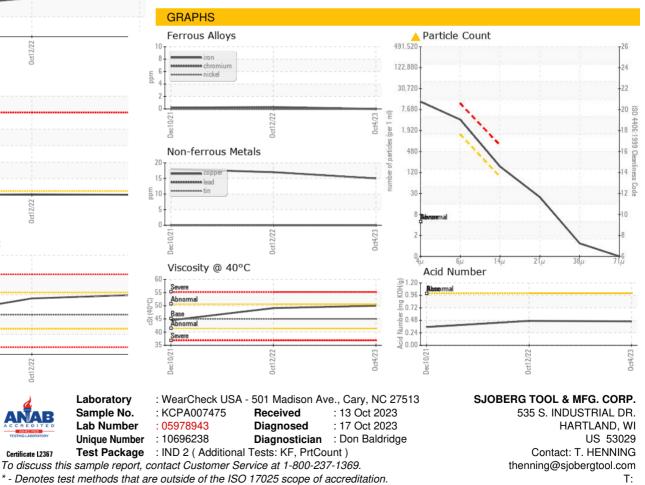

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: T. HENNING - SJOHAR

F: