

### **PROBLEM SUMMARY**

Sample Rating Trend


ISO

# Machine Id KAESER AS 20 7868446 (S/N 1310)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### **COMPONENT CONDITION SUMMARY**

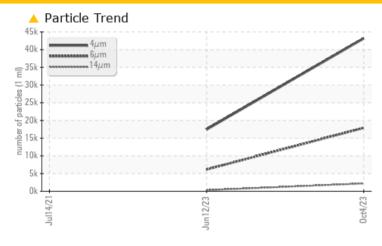

### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL					
Particles >6µm	ASTM D7647	>1300	<b>17898</b>	<u></u> 6144						
Particles >14μm	ASTM D7647	>80	<b>2215</b>	<b>▲</b> 321						
Particles >21μm	ASTM D7647	>20	<b>476</b>	<u>^</u> 52						
Particles >38μm	ASTM D7647	>4	<u>^</u> 7	1						
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>23/21/18</b>	<u>\</u> 21/20/16						

**Customer Id: WAREAS** Sample No.: KCPA007525 Lab Number: 05978951 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 12 Jun 2023 Diag: Jonathan Hester

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 14 Jul 2021 Diag: Don Baldridge

WAIER




Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. There is a moderate concentration of water present in the oil. Free water present. The AN level is acceptable for this fluid.





### **OIL ANALYSIS REPORT**

Sample Rating Trend

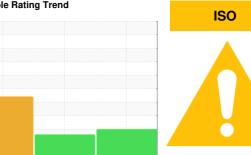

## KAESER AS 20 7868446 (S/N 1310)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			2021	Jun2023 0ct202	2	
SAMPLE INFORM	AATIONI	method	limit/base			history2
	MATION		IIIIII/base	current	history1	
Sample Number		Client Info		KCPA007525	KCPA003297	KC98614
Sample Date	la u a	Client Info		04 Oct 2023	12 Jun 2023	14 Jul 2021
Machine Age	hrs	Client Info		11079	7482 0	690 690
Oil Age	hrs	Client Info		N/A	N/A	
Oil Changed		Client Info		N/A ABNORMAL	ABNORMAL	Changed ABNORMAL
Sample Status						
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m		<1	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	14	7	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	1
Barium	ppm	ASTM D5185m	90	15	75	39
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	46	76	56
Calcium	ppm	ASTM D5185m	2	3	4	1
Phosphorus	ppm	ASTM D5185m		<1	2	10
Zinc	ppm	ASTM D5185m		8	12	0
Sulfur	ppm	ASTM D5185m		17300	23311	17926
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		18	17	6
Potassium	ppm	ASTM D5185m	>20	4	6	9
Water	%	ASTM D6304	>0.05	0.020	0.027	<b>△</b> 0.592
ppm Water	ppm	ASTM D6304	>500	202.6	277.2	▲ 5920
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		43142	17425	
Particles >6µm		ASTM D7647	>1300	<b>17898</b>	<b>△</b> 6144	
Particles >14µm		ASTM D7647	>80	<b>2215</b>	<u> </u>	
Particles >21µm		ASTM D7647	>20	<b>▲</b> 476	<u>^</u> 52	
Particles >38µm		ASTM D7647	>4	<u>^</u> 7	1	
Particles >71μm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	△ 23/21/18	△ 21/20/16	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
. LOID BEGINDA		motriou	mmubase	Carrent	Thistory I	Historyz

0.38

0.34

0.354



### **OIL ANALYSIS REPORT**

