




# OIL ANALYSIS REPORT

Sample Rating Trend

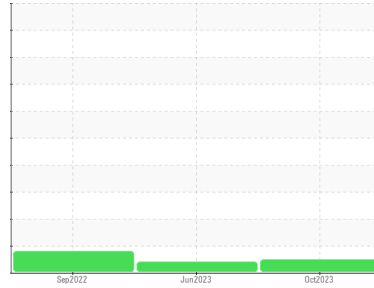

**NORMAL**



Machine Id  
**KAESER BSV 100 6340700 (S/N 1080)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA000784</b>	KCPA005405	KCP50241
Sample Date	Client Info		<b>06 Oct 2023</b>	05 Jun 2023	07 Sep 2022
Machine Age	hrs	Client Info	<b>37443</b>	36223	30365
Oil Age	hrs	Client Info	<b>0</b>	0	3000
Oil Changed	Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	<1	0
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	1
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>2</b>	6	4
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 90	<b>98</b>	50	12
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 90	<b>104</b>	139	125
Calcium	ppm	ASTM D5185m 2	<b>5</b>	5	13
Phosphorus	ppm	ASTM D5185m	<b>&lt;1</b>	<1	13
Zinc	ppm	ASTM D5185m	<b>0</b>	0	6
Sulfur	ppm	ASTM D5185m	<b>17107</b>	16397	15512

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>15</b>	24	23
Potassium	ppm	ASTM D5185m >20	<b>1</b>	4	<1
Water	%	ASTM D6304 >0.05	<b>0.024</b>	0.020	0.027
ppm Water	ppm	ASTM D6304 >500	<b>245.2</b>	205.5	271.2






**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>1253</b>	1058	---
Particles >6µm	ASTM D7647 >1300		<b>396</b>	329	---
Particles >14µm	ASTM D7647 >80		<b>46</b>	37	---
Particles >21µm	ASTM D7647 >20		<b>13</b>	11	---
Particles >38µm	ASTM D7647 >4		<b>1</b>	2	---
Particles >71µm	ASTM D7647 >3		<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>17/16/13</b>	17/16/12	---

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.39</b>	0.47	0.41


# OIL ANALYSIS REPORT

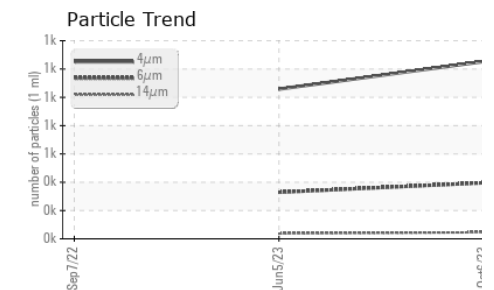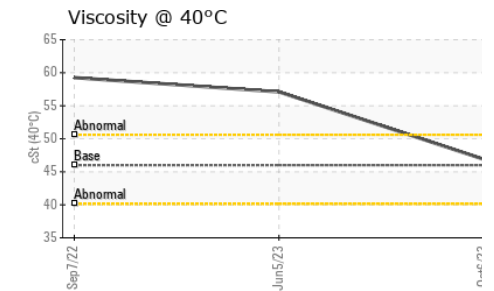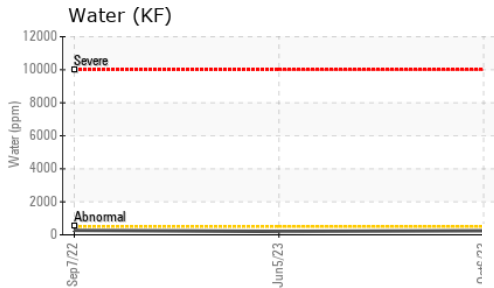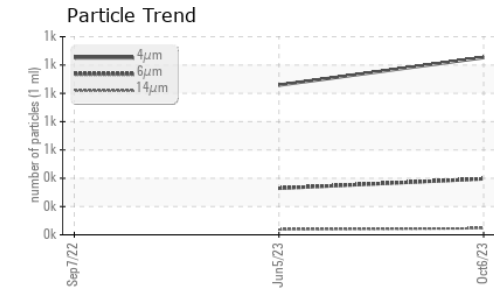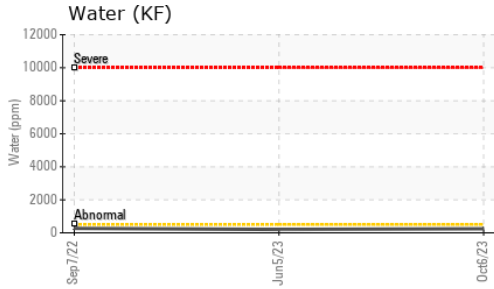






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT ▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	46.9	57.1	59.26

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

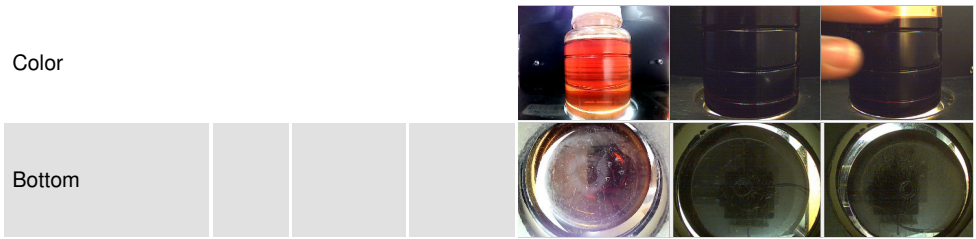

## GRAPHS

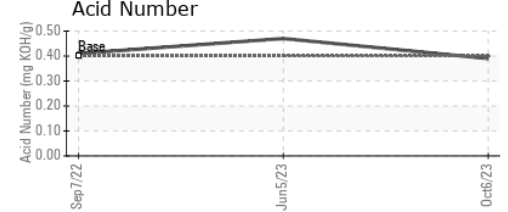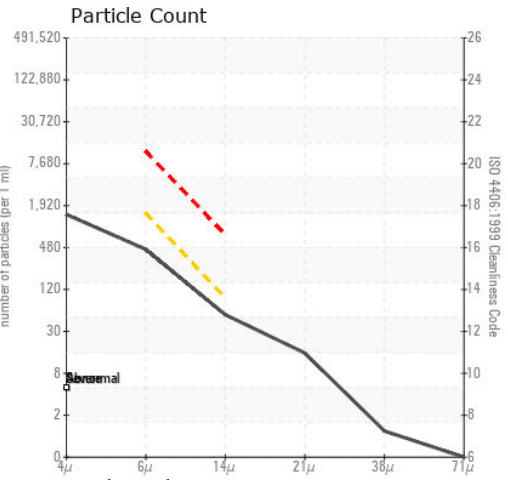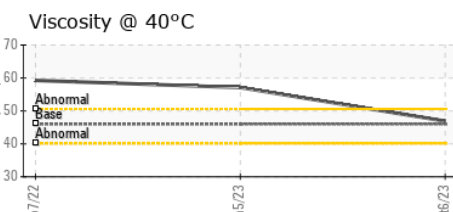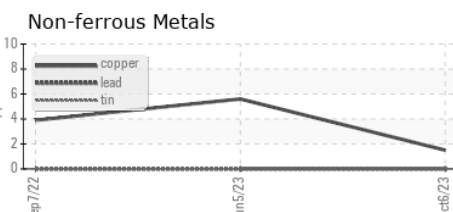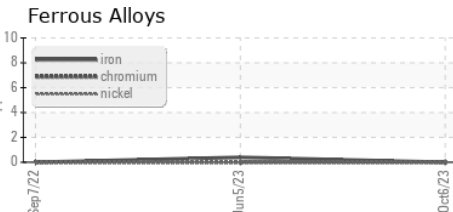

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA000784 **Received** : 13 Oct 2023  
**Lab Number** : 05978954 **Tested** : 16 Oct 2023  
**Unique Number** : 10696249 **Diagnosed** : 17 Oct 2023 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**GREINER BIO-ONE**  
 4238 CAPITOL DR.  
 MONROE, NC  
 US 28112  
 Contact: CHRISTOPHER BYRNE  
 christopher.byrne@gbo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)