



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id

PRESS 41

Component

Hydraulic System

Fluid

SHELL TELLUS S2 M 46 (86 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0859190 | --- | --- |
| Sample Date | Client Info | | 04 Oct 2023 | --- | --- |
| Machine Age | hrs | Client Info | 0 | --- | --- |
| Oil Age | hrs | Client Info | 6000 | --- | --- |
| Oil Changed | Client Info | | Filtered | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 6 | --- | --- |
| Chromium | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >20 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m | 85 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 358 | --- | --- |
| Zinc | ppm | ASTM D5185m | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 1811 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >15 | <1 | --- | --- |
| Sodium | ppm | ASTM D5185m | 4 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 0 | --- | --- |

FLUID CLEANLINESS





| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 2552 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | 819 | --- | --- |
| Particles >14µm | ASTM D7647 | >160 | 123 | --- | --- |
| Particles >21µm | ASTM D7647 | >40 | 46 | --- | --- |
| Particles >38µm | ASTM D7647 | >10 | 5 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 1 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 19/17/14 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|--------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.183 | --- | --- |



OIL ANALYSIS REPORT

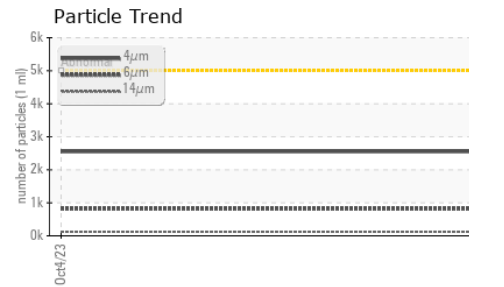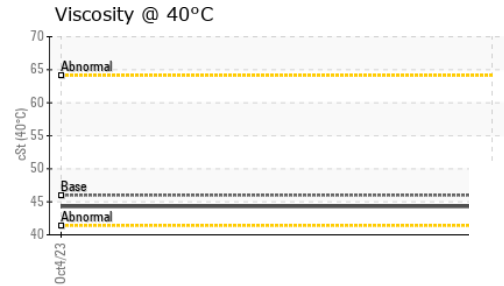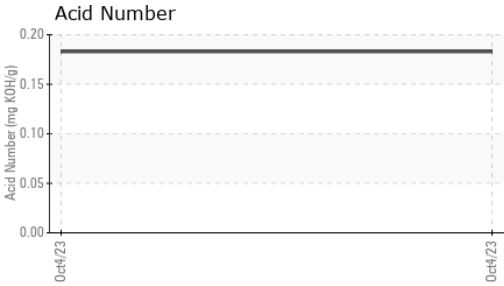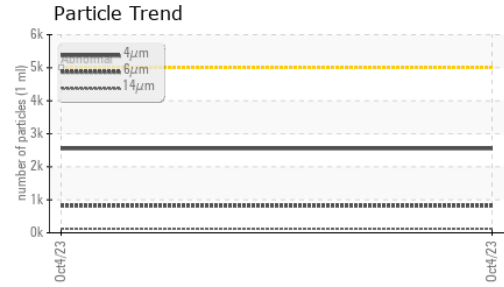






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal | scalar | *Visual | NONE | LIGHT | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|-------------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 46.0 | 44.3 | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | |
|--------|--|----------|----------|
| Color | | no image | no image |
| Bottom | | no image | no image |

GRAPHS

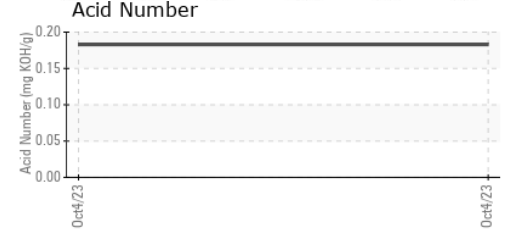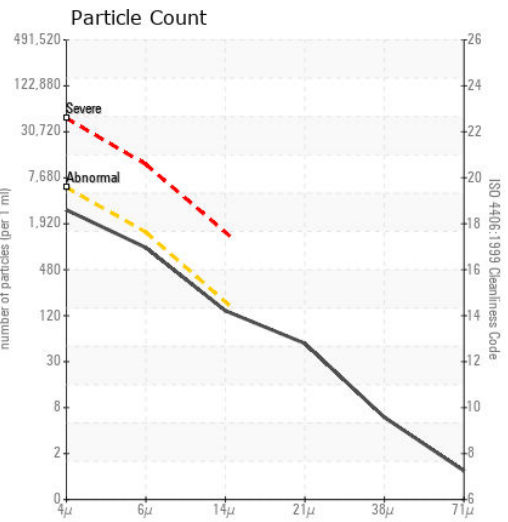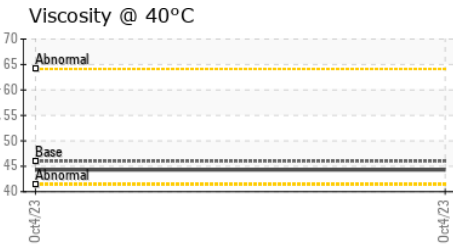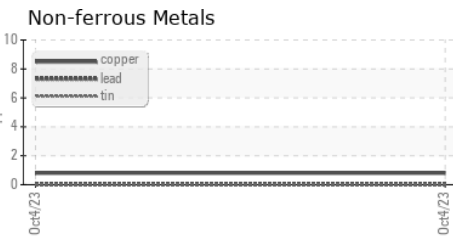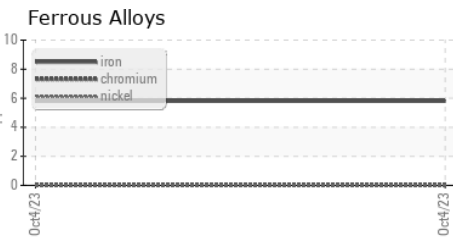

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0859190 Received : 16 Oct 2023
 Lab Number : 05979577 Diagnosed : 17 Oct 2023
 Unique Number : 10696872 Diagnostician : Don Baldrige
 Test Package : PLANT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VIAnt MEDICAL
 2052 WEST 11TH ST
 UPLAND, CA
 US 91786

Contact: Alan Kinum
 alan.kinum@viantmedical.com
 T: (909)981-3991
 F: (909)921-5322