


# PROBLEM SUMMARY

Sample Rating Trend

VISCOSITY




Machine Id  
**CAN RIG RIG 55-B HPU CRANE (S/N 62965)**  
Component  
**Port Hydraulic System**  
Fluid  
**CHEVRON CLARITY HYDRAULIC AW 68 (55 GAL)**

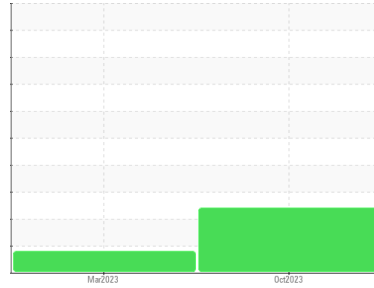


## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

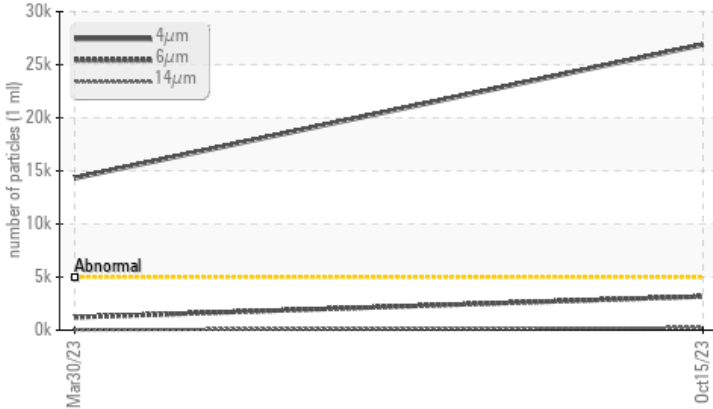

### ▲ Viscosity @ 40°C

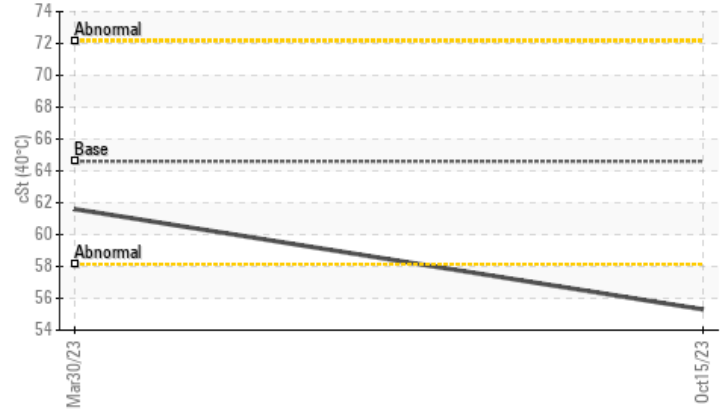

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ 26885	▲ 14306	---
Particles >6µm	ASTM D7647	>1300	▲ 3175	1215	---
Particles >14µm	ASTM D7647	>160	▲ 226	31	---
Particles >21µm	ASTM D7647	>40	▲ 66	6	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/19/15	▲ 21/17/12	---
Visc @ 40°C	cSt	ASTM D445	64.6	▲ 55.3	61.6

Customer Id: PARNEWLA  
Sample No.: RP0031839  
Lab Number: 05979592  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS

**30 Mar 2023 Diag: Don Baldrige**

ISO




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

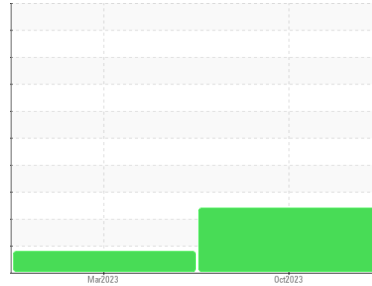

VISCOSITY



Machine Id  
**CAN RIG RIG 55-B HPU CRANE (S/N 62965)**

Component  
**Port Hydraulic System**

Fluid  
**CHEVRON CLARITY HYDRAULIC AW 68 (55 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0031839</b>	RP0018382	---
Sample Date	Client Info		<b>15 Oct 2023</b>	30 Mar 2023	---
Machine Age	hrs	Client Info	<b>0</b>	891	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	Not Changd	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>3</b>	3	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >20	<b>2</b>	<1	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>0</b>	<1	---
Calcium	ppm	ASTM D5185m	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m	<b>376</b>	245	---
Zinc	ppm	ASTM D5185m	<b>17</b>	19	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>6</b>	3	---
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	---
Water	%	ASTM D6304 >0.05	<b>0.001</b>	0.007	---
ppm Water	ppm	ASTM D6304 >500	<b>11.6</b>	76.2	---

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 26885</b>	▲ 14306	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 3175</b>	1215	---
Particles >14µm	ASTM D7647	>160	<b>▲ 226</b>	31	---
Particles >21µm	ASTM D7647	>40	<b>▲ 66</b>	6	---
Particles >38µm	ASTM D7647	>10	<b>5</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 22/19/15</b>	▲ 21/17/12	---

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.08</b>	0.19	---

# OIL ANALYSIS REPORT


## Particle Trend

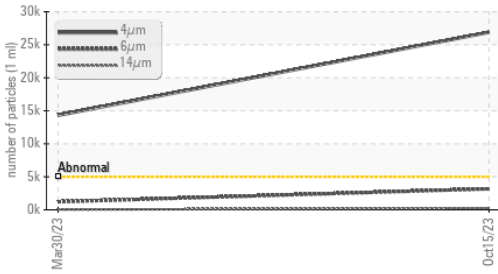


## Water (KF)

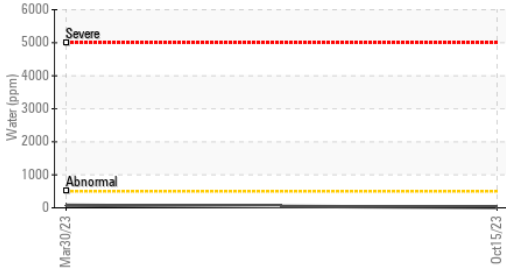


## Viscosity @ 40°C

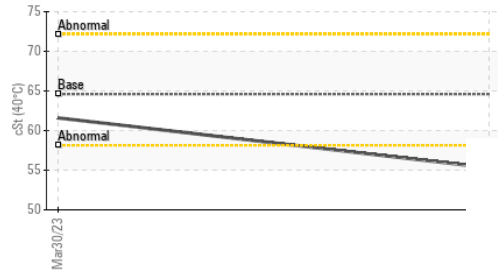

## Acid Number

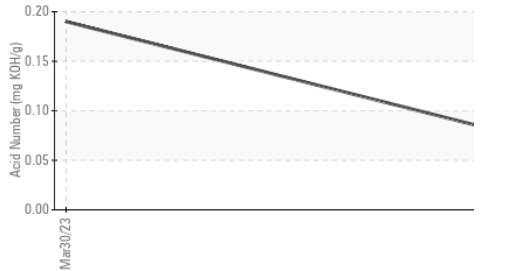


## Water (KF)

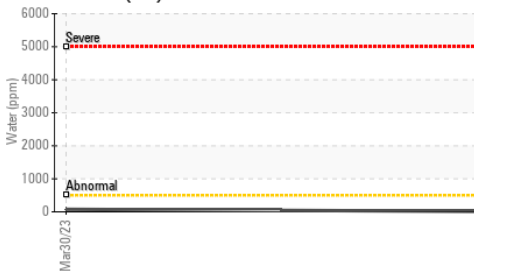

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	64.6 <b>▲ 55.3</b>	61.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

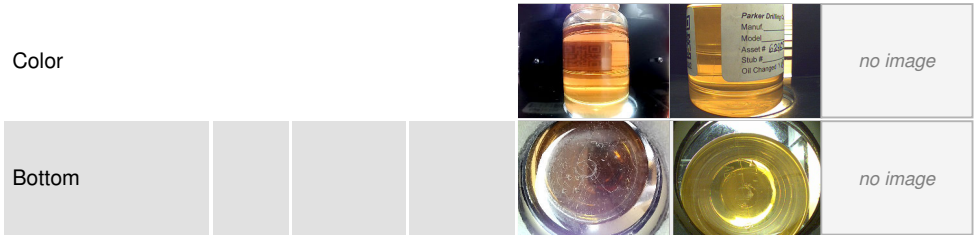


## GRAPHS

### Ferrous Alloys

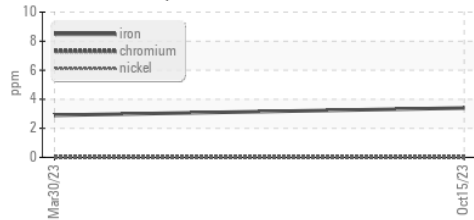


### Non-ferrous Metals

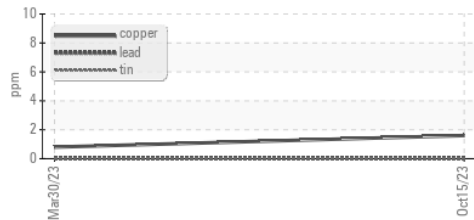


### Viscosity @ 40°C



### Particle Count

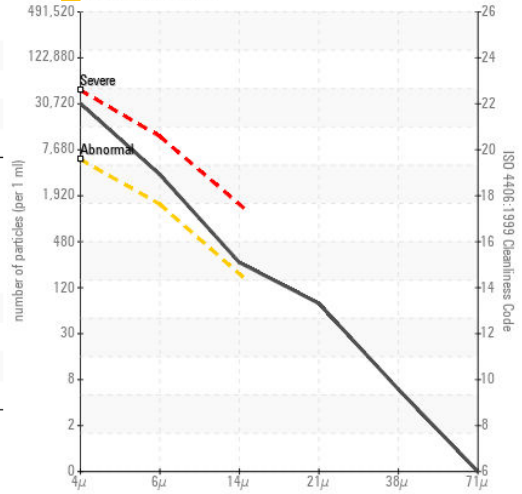

### Acid Number

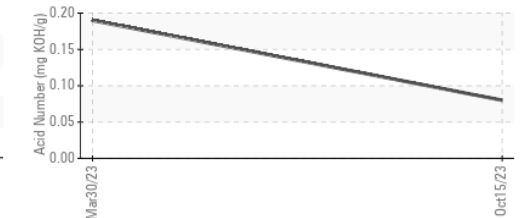

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0031839 **Received** : 16 Oct 2023  
**Lab Number** : 05979592 **Diagnosed** : 19 Oct 2023  
**Unique Number** : 10696887 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2

**PARKER WELLBORE**  
 1110 UNIFAB RD  
 NEW IBERIA, LA  
 US 70560

Contact: BRENT CARLINE  
 brent.carline@parkerwellbore.com  
 T: (337)364-3122  
 F: (337)364-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)