




PROBLEM SUMMARY


Sample Rating Trend

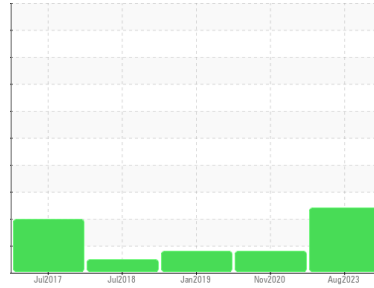

Machine Id
KAESER AS 31 1296/U0001 (S/N 3111934)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

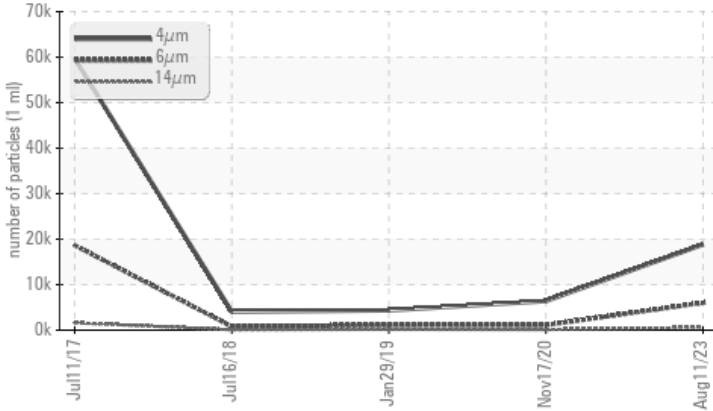

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	Limit	ABNORMAL	ATTENTION	ATTENTION
Particles >6µm	ASTM D7647	>1300	▲ 6005	1099	1122
Particles >14µm	ASTM D7647	>80	▲ 599	▲ 118	▲ 157
Particles >21µm	ASTM D7647	>20	▲ 221	▲ 51	▲ 56
Particles >38µm	ASTM D7647	>4	▲ 16	3	4
Particles >71µm	ASTM D7647	>3	▲ 2	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 21/20/16	▲ 17/14	▲ 17/14

Customer Id: SUPSTEMI
 Sample No.: KCPA005994
 Lab Number: 05979606
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

17 Nov 2020 Diag: Jonathan Hester

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



29 Jan 2019 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



16 Jul 2018 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

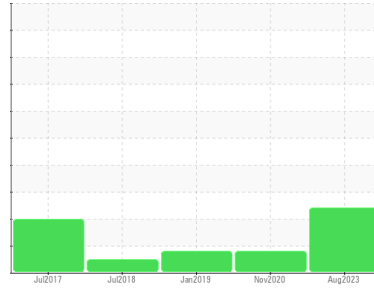

ISO



Machine Id
KAESER AS 31 1296/U0001 (S/N 3111934)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA005994	KCP24704	KCP11181
Sample Date	Client Info		11 Aug 2023	17 Nov 2020	29 Jan 2019
Machine Age	hrs	Client Info	76713	68324	62611
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	Changed	Not Chngd
Sample Status			ABNORMAL	ATTENTION	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	1	2	2
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >3	0	0	<1
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	<1	0	0
Lead	ppm	ASTM D5185m >10	0	0	0
Copper	ppm	ASTM D5185m >50	2	2	1
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m 90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 90	30	30	55
Calcium	ppm	ASTM D5185m 2	0	0	<1
Phosphorus	ppm	ASTM D5185m	0	4	<1
Zinc	ppm	ASTM D5185m	0	5	13
Sulfur	ppm	ASTM D5185m	17601	16612	18158

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	0	0
Sodium	ppm	ASTM D5185m	11	8	17
Potassium	ppm	ASTM D5185m >20	<1	<1	3
Water	%	ASTM D6304 >0.05	0.015	0.012	0.009
ppm Water	ppm	ASTM D6304 >500	157.8	120.8	90






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		18836	6398	4348
Particles >6µm	ASTM D7647 >1300		▲ 6005	1099	1122
Particles >14µm	ASTM D7647 >80		▲ 599	▲ 118	▲ 157
Particles >21µm	ASTM D7647 >20		▲ 221	▲ 51	▲ 56
Particles >38µm	ASTM D7647 >4		▲ 16	3	4
Particles >71µm	ASTM D7647 >3		▲ 2	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13		▲ 21/20/16	▲ 17/14	▲ 17/14

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.35	0.388	0.358


OIL ANALYSIS REPORT

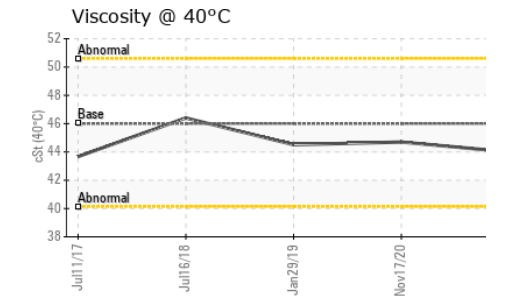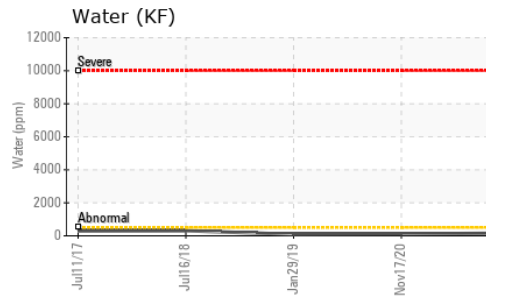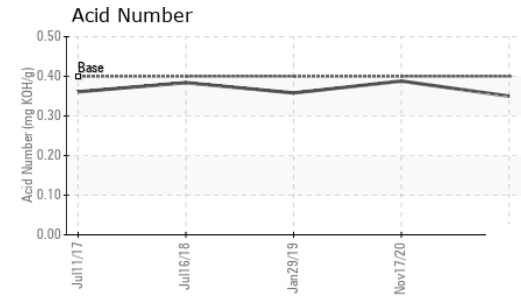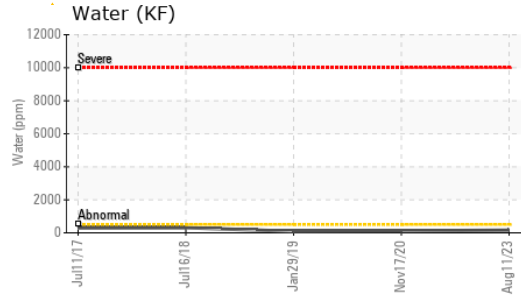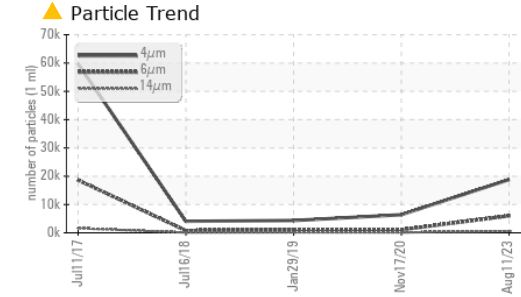






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.0	44.7	44.51

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

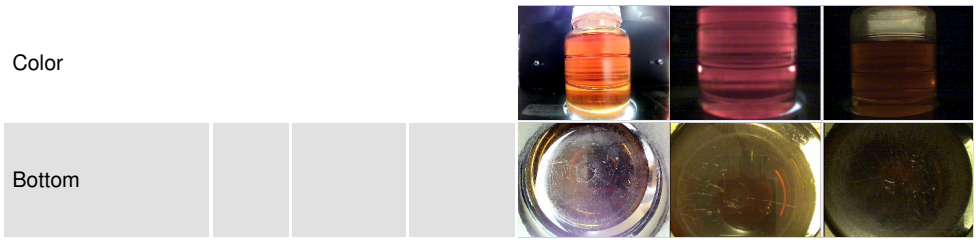

GRAPHS

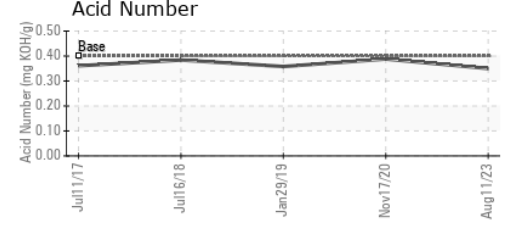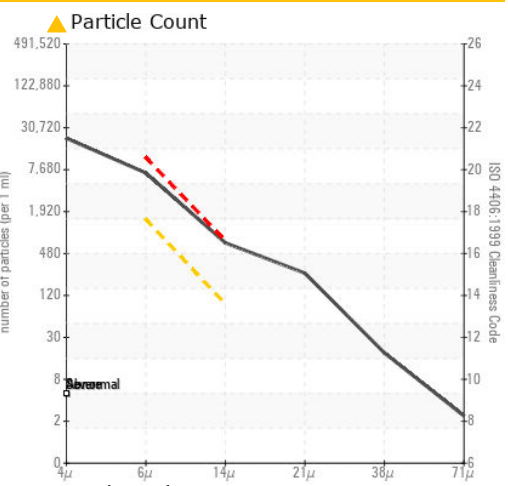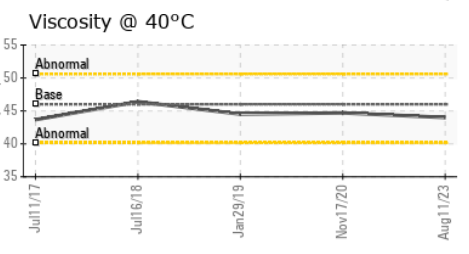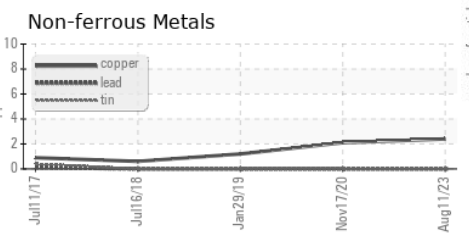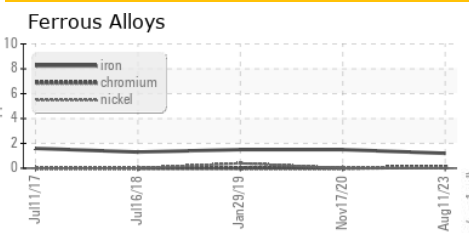

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA005994 **Received** : 16 Oct 2023
Lab Number : 05979606 **Diagnosed** : 18 Oct 2023
Unique Number : 10696901 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

SUPERIOR MOLD SERVICES
 6100 15 MILE RD
 STERLING HEIGHTS, MI
 US 48312
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: