

# **PROBLEM SUMMARY**

Sample Rating Trend


ISO

# Machine Id KAESER AS 25T 6037320 (S/N 1011)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# **COMPONENT CONDITION SUMMARY**

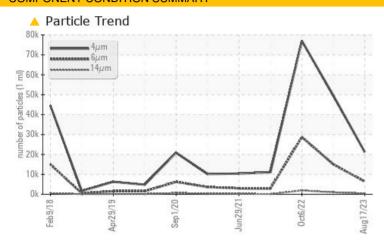

# RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	<u> </u>	<u>▲</u> 15057	<u>▲</u> 28722				
Particles >14μm	ASTM D7647	>80	<b>415</b>	<b>994</b>	<u> </u>				
Particles >21µm	ASTM D7647	>20	<u> </u>	<u>^</u> 214	<u>^</u> 250				
Particles >38μm	ASTM D7647	>4	<u>^</u> 8	<u>4</u>	<b>9</b>				
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u>22/20/16</u>	<u>\$\Delta\$ 23/21/17</u>	<u>\$\lambda\$\$ 23/22/18</u>				

Customer Id: NAGWAL Sample No.: KC124461 Lab Number: 05979607 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 ihester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

# **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

# HISTORICAL DIAGNOSIS

# 02 May 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



# 06 Oct 2022 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 18 Jan 2022 Diag: Angela Borella

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

Sample Rating Trend



# KAESER AS 25T 6037320 (S/N 1011)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

**DIAGNOSIS** 

# Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

# Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Feb 2018	Apr2019 Sep2020	Jun2021 Oct2022	Aug2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC124461	KC111741	KC106524
Sample Date		Client Info		17 Aug 2023	02 May 2023	06 Oct 2022
Machine Age	hrs	Client Info		44298	42341	37423
Oil Age	hrs	Client Info		0	5000	6050
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	16	14	14
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	12	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	0	18	4
Calcium	ppm	ASTM D5185m	2	0	2	0
Phosphorus	ppm	ASTM D5185m		0	<1	22
Zinc	ppm	ASTM D5185m		0	1	13
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		1	4	0
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304	>0.05	0.005	0.010	0.011
ppm Water	ppm	ASTM D6304	>500	53.2	106.6	115.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		21216	49585	77042
Particles >6µm		ASTM D7647	>1300	<u>▲</u> 6372	<u>▲</u> 15057	▲ 28722
Particles >14μm		ASTM D7647	>80	<u>415</u>	<u></u> 994	<u> 1899</u>
Particles >21μm		ASTM D7647	>20	<u> </u>	<u>^</u> 214	<u>^</u> 250
Particles >38μm		ASTM D7647	>4	<u>^</u> 8	<u>4</u>	<b>4</b> 9
		ASTM D7647	>3	1	0	0
Particles >71μm						
Particles >71µm Oil Cleanliness		ISO 4406 (c)	>/17/13	∆ 22/20/16	△ 23/21/17	▲ 23/22/18
	TION					



# **OIL ANALYSIS REPORT**



Certificate L2367

**Unique Number** 

Test Package

: 10696902

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

: IND 2

Diagnostician

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: Jonathan Hester

US 43465

T: F:

Contact: Service Manager