

# **PROBLEM SUMMARY**

Sample Rating Trend


ISO

Machine Id **8657292 (S/N 1904)** 

Component Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

## **COMPONENT CONDITION SUMMARY**

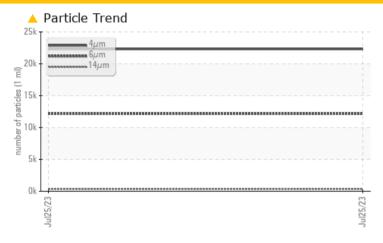

## RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |         |                 |  |  |  |  |  |  |
|--------------------------|--------------|---------|-----------------|--|--|--|--|--|--|
| Sample Status            |              |         | ABNORMAL        |  |  |  |  |  |  |
| Particles >6µm           | ASTM D7647   | >1300   | <b>12148</b>    |  |  |  |  |  |  |
| Particles >14µm          | ASTM D7647   | >80     | <b>4</b> 351    |  |  |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >/17/13 | <b>22/21/16</b> |  |  |  |  |  |  |

Customer Id: DETSHE Sample No.: KCPA003069 Lab Number: 05979616 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## RECOMMENDED ACTIONS

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS




**OIL ANALYSIS REPORT** 

8657292 (S/N 1904)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

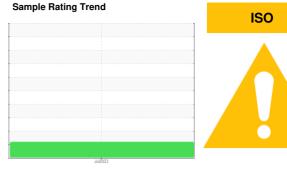

## **DIAGNOSIS**

### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                   |            |              |                | Jul2023         |          |          |
|-------------------|------------|--------------|----------------|-----------------|----------|----------|
| SAMPLE INFORM     | ATION      | method       | limit/base     | current         | history1 | history2 |
| Sample Number     |            | Client Info  |                | KCPA003069      |          |          |
| Sample Date       |            | Client Info  |                | 25 Jul 2023     |          |          |
| Machine Age       | hrs        | Client Info  |                | 2173            |          |          |
| Oil Age           | hrs        | Client Info  |                | 0               |          |          |
| Oil Changed       |            | Client Info  |                | N/A             |          |          |
| Sample Status     |            |              |                | ABNORMAL        |          |          |
| WEAR METALS       |            | method       | limit/base     | current         | history1 | history2 |
| Iron              | ppm        | ASTM D5185m  | >50            | <1              |          |          |
| Chromium          | ppm        | ASTM D5185m  | >10            | 0               |          |          |
| Nickel            | ppm        | ASTM D5185m  | >3             | 0               |          |          |
| Titanium          | ppm        | ASTM D5185m  | >3             | 0               |          |          |
| Silver            | ppm        | ASTM D5185m  | >2             | 0               |          |          |
| Aluminum          | ppm        | ASTM D5185m  | >10            | 0               |          |          |
| Lead              | ppm        | ASTM D5185m  | >10            | <1              |          |          |
| Copper            | ppm        | ASTM D5185m  | >50            | 13              |          |          |
| Tin               | ppm        | ASTM D5185m  | >10            | 0               |          |          |
| Vanadium          | ppm        | ASTM D5185m  |                | 0               |          |          |
| Cadmium           | ppm        | ASTM D5185m  |                | 0               |          |          |
| ADDITIVES         | ρρ         | method       | limit/base     | current         | history1 | history2 |
|                   |            |              | IIIIIIIIIIIIII |                 | HISTOLAL | HISTOLYZ |
| Boron             | ppm        | ASTM D5185m  | 0.0            | 0               |          |          |
| Barium            | ppm        | ASTM D5185m  | 90             | 0               |          |          |
| Molybdenum        | ppm        | ASTM D5185m  |                | 0               |          |          |
| Manganese         | ppm        | ASTM D5185m  |                | <1              |          |          |
| Magnesium         | ppm        | ASTM D5185m  | 90             | 6               |          |          |
| Calcium           | ppm        | ASTM D5185m  | 2              | 0               |          |          |
| Phosphorus        | ppm        | ASTM D5185m  |                | 0               |          |          |
| Zinc              | ppm        | ASTM D5185m  |                | 0               |          |          |
| Sulfur            | ppm        | ASTM D5185m  |                | 17235           |          |          |
| CONTAMINANTS      |            | method       | limit/base     | current         | history1 | history2 |
| Silicon           | ppm        | ASTM D5185m  | >25            | 4               |          |          |
| Sodium            | ppm        | ASTM D5185m  |                | 3               |          |          |
| Potassium         | ppm        | ASTM D5185m  | >20            | <1              |          |          |
| Water             | %          | ASTM D6304   | >0.05          | 0.006           |          |          |
| ppm Water         | ppm        | ASTM D6304   | >500           | 61.3            |          |          |
| FLUID CLEANLINI   | ESS        | method       | limit/base     | current         | history1 | history2 |
| Particles >4µm    |            | ASTM D7647   |                | 22314           |          |          |
| Particles >6μm    |            | ASTM D7647   | >1300          | <u>12148</u>    |          |          |
| Particles >14μm   |            | ASTM D7647   | >80            | <b>4</b> 351    |          |          |
| Particles >21μm   |            | ASTM D7647   | >20            | 14              |          |          |
| Particles >38µm   |            | ASTM D7647   | >4             | 1               |          |          |
| Particles >71µm   |            | ASTM D7647   | >3             | 0               |          |          |
| Oil Cleanliness   |            | ISO 4406 (c) | >/17/13        | <u>22/21/16</u> |          |          |
| FLUID DEGRADA     | TION       | method       | limit/base     | current         | history1 | history2 |
| Asid Number (ANI) | ma 1/011/a | ACTM DOOME   |                | 0.25            |          |          |


Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.35



# **OIL ANALYSIS REPORT**

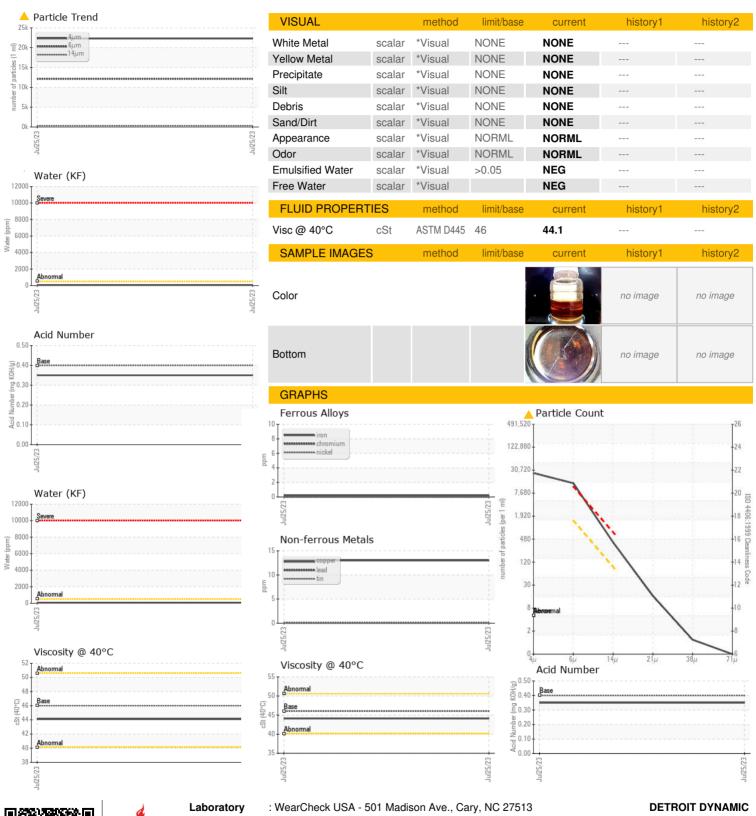





Certificate L2367

Sample No. Lab Number **Unique Number** 

: 05979616

: KCPA003069 : 10696911

Received : 16 Oct 2023 : 18 Oct 2023

Diagnosed Diagnostician : Jonathan Hester Test Package : IND 2 ( Additional Tests: KF, PrtCount )

51752 DANVIEW TECHNOLOGY CT SHELBY TOWNSHIP, MI US 48315

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: