

OIL ANALYSIS REPORT

Sample Rating Trend



Built for a lifetime."

KAESER AS 25 6023240 (S/N 1003) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jun2018	Jul2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA003094	KC80762	
Sample Date		Client Info		21 Jul 2023	12 Jun 2018	
Machine Age	hrs	Client Info		28214	4232	
Oil Age	hrs	Client Info		0	2107	
Oil Changed		Client Info		N/A	Changed	
Sample Status				NORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	<1	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper		ASTM D5185m		32	6	
Tin	ppm	ASTM D5185m	>10	0	0	
	ppm	ASTM D5185m	>10		0	
Antimony Vanadium	ppm					
	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m	90	0	3	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m	90	0	52	
Calcium	ppm	ASTM D5185m	2	0	<1	
Phosphorus	ppm	ASTM D5185m		0	5	
Zinc	ppm	ASTM D5185m		0	10	
Sulfur	ppm	ASTM D5185m		13906	7403	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		<1	10	
Potassium	ppm	ASTM D5185m	>20	0	2	
Water	%	ASTM D6304	>0.05	0.007	0.020	
ppm Water	ppm	ASTM D6304	>500	78.3	200	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1154	6111	
Particles >6µm		ASTM D7647	>1300	225	1 773	
Particles >14µm		ASTM D7647	>80	12	<u> </u>	
Particles >21µm		ASTM D7647	>20	4	18	
Particles >38µm		ASTM D7647	>4	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/11	1 8/14	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.38	0.366	
·49·21) Rev: 1	manoning		0.1	Contact/Locatio		DOOR DDEWA

Report Id: PREWAR [WUSCAR] 05979630 (Generated: 10/18/2023 12:49:21) Rev: 1

Contact/Location: Service Manager - PREWAR



Viscosity @ 40°C

52

50

48

() 46 Bas

to 44

particles

3

2

0

47

Abnorma 40 38


Particle Trend


OIL ANALYSIS REPORT

scalar

*Visual

NONE

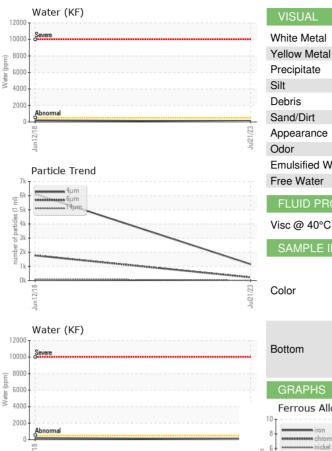

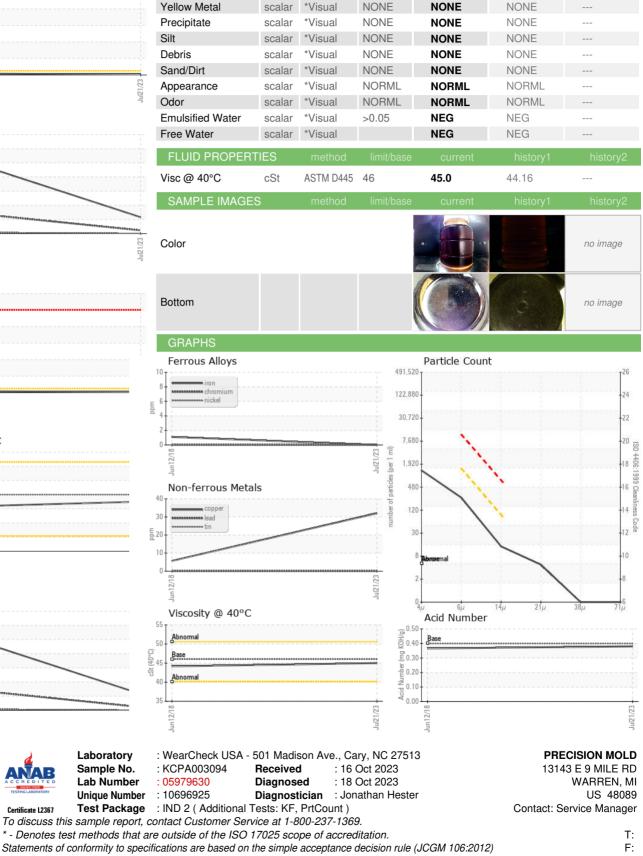

Certificate L2367

Contact/Location: Service Manager - PREWAR

VLITE

NONE