

OIL ANALYSIS REPORT

Sample Rating Trend



KR-FA-007005 - COMP 6 Component

Refrigeration Compressor USPI 1009-68 SC (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





		mothed	limit/boos	ou present	bietorut	biotom 0
SAMPLE INFORM	TATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0001172	USP241603	USP230989
Sample Date		Client Info		15 Oct 2023	15 Sep 2022	14 Jun 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	<1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	1	<1
Lead	ppm	ASTM D5185m	>2	<1	<1	0
Copper	ppm	ASTM D5185m		0	0	0
Tin	ppm	ASTM D5185m	>4	ء <1	<1	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	mmbase	0	0	<1
Barium		ASTM D5185m		0	0	0
	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm			0		0
Magnesium	ppm	ASTM D5185m		0	0	÷
Calcium	ppm	ASTM D5185m			0	<1
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m	50	<1	0	0
Sulfur	ppm	ASTM D5185m		0	12	27
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.01	0.001	0.003	0.003
ppm Water	ppm	ASTM D6304	>100	4.5	32.0	29.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	958	1047	549
Particles >6µm		ASTM D7647	>2500	264	123	127
Particles >14µm		ASTM D7647	>640	23	12	10
Particles >21µm		ASTM D7647	>160	6	3	2
Particles >38µm		ASTM D7647	>40	1	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/16	17/15/12	17/14/11	16/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.015	0.014
P-41-06) Boy: 1	9 9		0			

Report Id: KRAKIRMO [WUSCAR] 05979781 (Generated: 10/23/2023 13:41:06) Rev: 1

Contact/Location: THOMAS BARRETT - KRAKIRMO



Water (KF)

OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar


White Metal


Yellow Metal

Precipitate

Silt

Debris

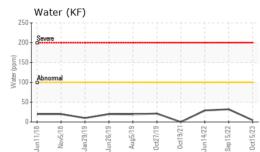

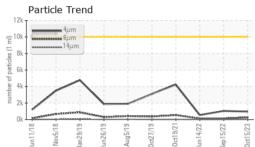



*Visual

*Visual

*Visua

*Visual

scalar *Visual

NONE


NORML


NORML

NEG

NEG

70.8

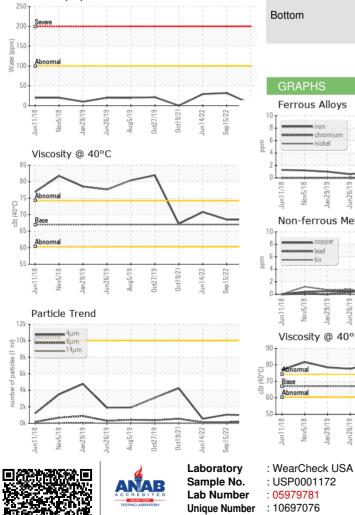

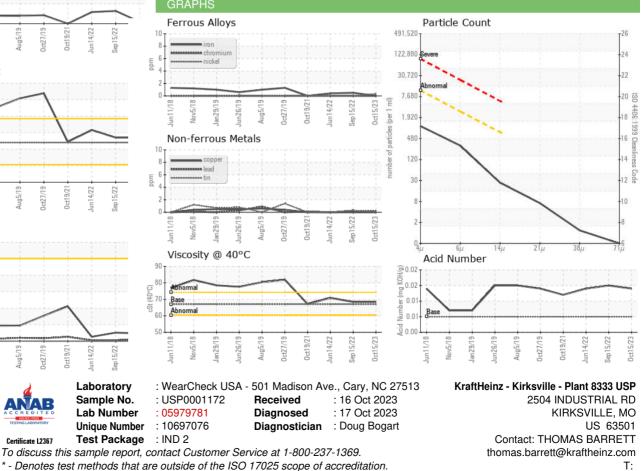

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: