



PROBLEM SUMMARY


Machine Id WIRTGEN W210FI 23200362

Rear Left Final Drive Fluid VG 220 (--- GAL)

COMPONENT CONDITION SUMMARY

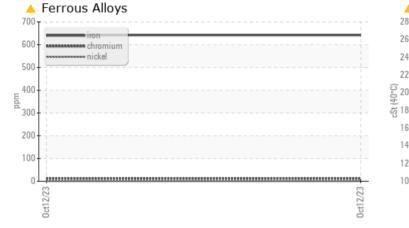

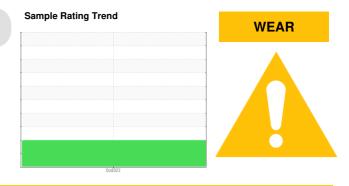

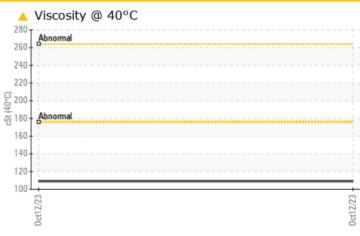

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL		
Iron	ppm	ASTM D5185m	>500	<u> </u>		
Chromium	ppm	ASTM D5185m	>10	<u> </u>		
Visc @ 40°C	cSt	ASTM D445		<u> </u>		

Customer Id: JAMASH Sample No.: JR0179462 Lab Number: 05979955 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Machine Ic

DIAGNOSIS

monitor.

A Wear

oil

type.

Recommendation

Gear wear is indicated.

Contamination

Fluid Condition

WIRTGEN W210FI 23200362 Component

Rear Left Final Drive VG 220 (--- GAL)

SAMPLE INFORMATION method limit/base current history1 history2 JR0179462 Sample Number **Client Info** The oil change at the time of sampling has been 12 Oct 2023 Sample Date Client Info noted. Resample at the next service interval to Client Info 2281 Machine Age hrs Oil Age hrs Client Info 0 Oil Changed Changed **Client Info** ABNORMAL Sample Status WEAR METALS method limit/base current history1 history2 There is no indication of any contamination in the PQ 87 **ASTM D8184** ASTM D5185m >500 642 Iron ppm The oil viscosity is lower than normal. Confirm oil Chromium ppm ASTM D5185m >10 12 Nickel ASTM D5185m >10 ppm <1 Titanium ppm ASTM D5185m 3 Silver ASTM D5185m 0 ppm Aluminum ASTM D5185m >25 4 ppm ASTM D5185m >25 0 Lead ppm Copper ppm ASTM D5185m >50 <1 ASTM D5185m >10 3 Tin ppm Vanadium ppm ASTM D5185m 0 Cadmium ASTM D5185m 0 ppm **ADDITIVES** method limit/base current historv1 historv2 Boron ppm ASTM D5185m 214 Barium ASTM D5185m 0 ppm 0 Molybdenum ppm ASTM D5185m 8 Manganese ASTM D5185m ppm 12 Magnesium ASTM D5185m ppm Calcium ppm ASTM D5185m 67 Phosphorus ASTM D5185m 1415 ppm Zinc ASTM D5185m 51 ppm Sulfur ASTM D5185m 25500 ppm CONTAMINANTS method limit/base current history⁻ history2 Silicon ASTM D5185m >75 ppm 17 Sodium ASTM D5185m 2 ppm Potassium ASTM D5185m >20 <1 ppm VISUAL limit/base current history1 history2 method White Metal *Visual NONE NONE scalar Yellow Metal scalar *Visual NONE NONE *Visual NONE Precipitate scalar NONE Silt scalar *Visual NONE NONE Debris scalar *Visua NONE NONE

*Visual

*Visual

*Visual

*Visual

scalar

scalar

scalar

scalar

NONE

NORML

NORML

>0.2

NONE

NORML

NORML

NEG

Sand/Dirt


Odor

Appearance

Emulsified Water



OIL ANALYSIS REPORT

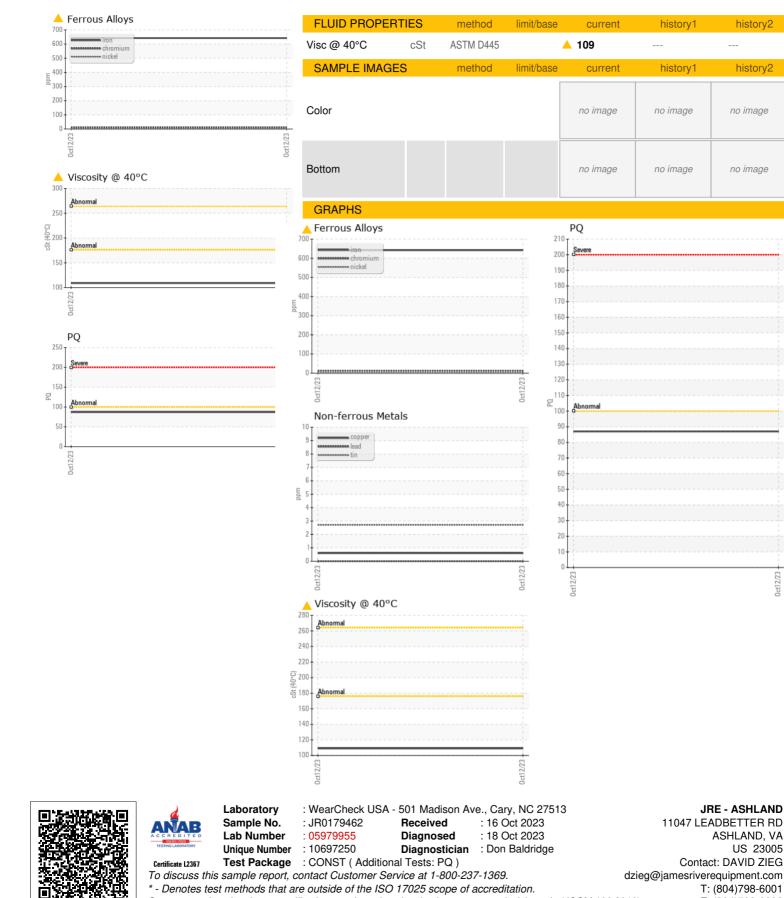

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DAVID ZIEG - JAMASH

JRE - ASHLAND

Contact: DAVID ZIEG

T: (804)798-6001

F: (804)798-0292

ASHLAND, VA

US 23005

0ct12/23

history2

history2

no image

no image