




OIL ANALYSIS REPORT

Sample Rating Trend

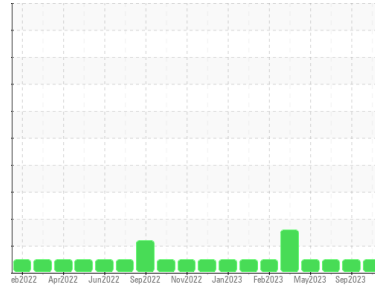

NORMAL



Machine Id
HARRIS

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0788733	WC0788731	WC0734076
Sample Date	Client Info		02 Oct 2023	01 Sep 2023	03 Jul 2023
Machine Age	hrs	Client Info	25609	25421	25058
Oil Age	hrs	Client Info	25609	25421	25058
Oil Changed		Client Info	N/A	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	9	8
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >10	<1	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	1	1
Lead	ppm	ASTM D5185m >10	0	0	1
Copper	ppm	ASTM D5185m >75	0	16	15
Tin	ppm	ASTM D5185m >10	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<1	0	0
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 5	0	0	<1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 25	0	8	7
Calcium	ppm	ASTM D5185m 200	75	432	426
Phosphorus	ppm	ASTM D5185m 300	299	393	399
Zinc	ppm	ASTM D5185m 370	462	478	478
Sulfur	ppm	ASTM D5185m 2500	2012	2171	2266

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	2	3	3
Sodium	ppm	ASTM D5185m	0	2	3
Potassium	ppm	ASTM D5185m >20	<1	0	3

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	43.4	45.1	45.0






OIL ANALYSIS REPORT

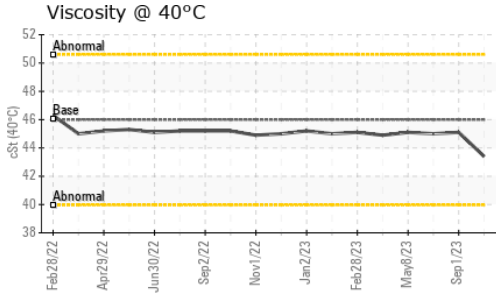

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	
Bottom			no image	no image	

GRAPHS

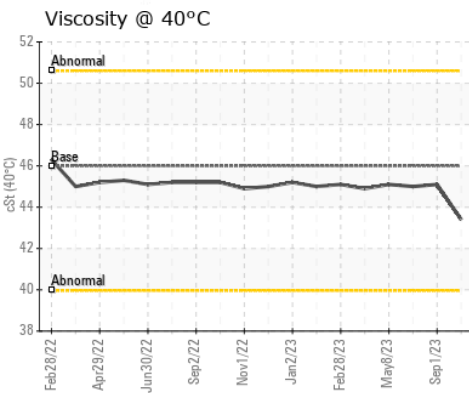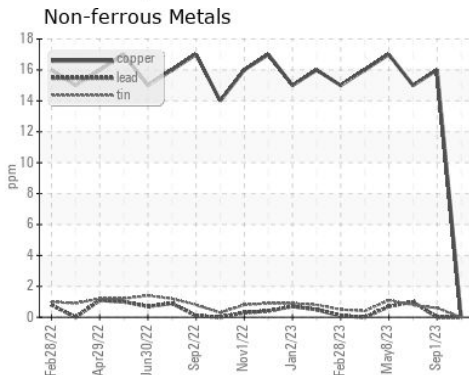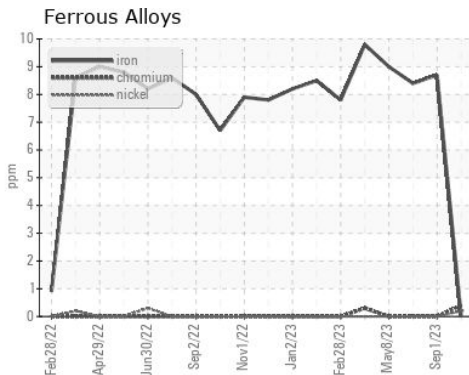

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0788733 **Received** : 16 Oct 2023
Lab Number : **05980044** **Diagnosed** : 17 Oct 2023
Unique Number : 10697339 **Diagnostician** : Wes Davis
Test Package : FLEET

ONEIDA HERKIMER SOLID WASTE
 80 LELAND AVENUE
 UTICA, NY
 US 13502
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: