


PROBLEM SUMMARY

Machine Id PETERBILT 208015 Component

Diesel Engine Fluid DIESEL ENGINE OIL SAE 40 (--- QTS)

COMPONENT CONDITION SUMMARY

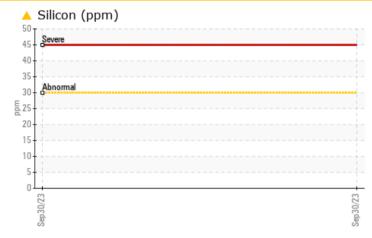

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC T | EST RE | SULTS | | | |
|---------------|--------|-------------|-----|----------|------|
| Sample Status | | | | ABNORMAL | |
| Silicon | ppm | ASTM D5185m | >30 | <u> </u> | |


Customer Id: CARLOCGA Sample No.: WC0724757 Lab Number: 05980195 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

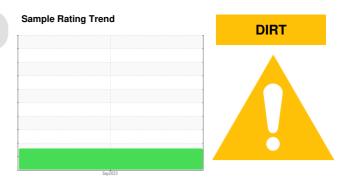

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

DIRT

Machine Id **PETERBILT 208015** Component

Diesel Engine Fluid DIESEL ENGINE OIL SAE 40 (--- QTS)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


| | | | | Sep2023 | | |
|--|--|---|--|---|--|---|
| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0724757 | | |
| Sample Date | | Client Info | | 30 Sep 2023 | | |
| Machine Age | mls | Client Info | | 0 | | |
| Oil Age | mls | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| CONTAMINATION | N | method | limit/base | current | history1 | history2 |
| Fuel | | WC Method | >5 | <1.0 | | |
| Glycol | | WC Method | | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >110 | 57 | | |
| Chromium | ppm | ASTM D5185m | >4 | 2 | | |
| Nickel | ppm | ASTM D5185m | >2 | <1 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | >2 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | | |
| Lead | ppm | ASTM D5185m | >45 | 2 | | |
| Copper | ppm | ASTM D5185m | >85 | 11 | | |
| Tin | ppm | ASTM D5185m | >4 | 3 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 250 | 63 | | |
| Barium | ppm | ASTM D5185m | 10 | 3 | | |
| | 1010 | | | | | |
| Molybdenum | ppm | ASTM D5185m | 100 | 68 | | |
| - | | ASTM D5185m ASTM D5185m | 100 | 68 1 | | |
| Manganese | ppm | | 100 450 | | | |
| Manganese Magnesium | ppm ppm | ASTM D5185m | | 1 | | |
| Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm | ASTM D5185m ASTM D5185m | 450 | 1 603 | | |
| Manganese Magnesium Calcium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | 450 3000 | 1 603 1241 | | |
| Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 450 3000 1150 | 1 603 1241 851 | | |
| Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 450 3000 1150 1350 | 1 603 1241 851 1027 | | |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 450 3000 1150 1350 4250 | 1 603 1241 851 1027 2519 | | |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method | 450 3000 1150 1350 4250 limit/base | 1 603 1241 851 1027 2519 current | history1 | history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m | 450 3000 1150 1350 4250 limit/base >30 | 1 603 1241 851 1027 2519 current ▲ 45 | history1 | history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m | 450 3000 1150 1350 4250 limit/base >30 >216 | 1 603 1241 851 1027 2519 current ▲ 45 8 | history1 | history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 450 3000 1150 1350 4250 limit/base >30 >216 >20 | 1 603 1241 851 1027 2519 current ▲ 45 8 7 | history1 | history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 450 3000 1150 1350 4250 limit/base >30 >216 >20 limit/base >3 | 1 603 1241 851 1027 2519 current ▲ 45 8 7 current | history1 history1 | history2 history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 450 3000 1150 1350 4250 limit/base >30 >216 >20 limit/base >3 | 1 603 1241 851 1027 2519 current ▲ 45 8 7 current 0.6 | history1 history1 | history2 history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7624 | 450 3000 1150 1350 4250 limit/base >30 >216 >20 limit/base >33 >20 | 1 603 1241 851 1027 2519 current ▲ 45 8 7 current 0.6 9.0 | history1 history1 | history2 history2 |
| Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D51854 *ASTM D7844 *ASTM D7624 | 450 3000 1150 1350 4250 Iimit/base >216 >20 Iimit/base >3 >20 >30 | 1 603 1241 851 1027 2519 current ▲ 45 8 7 current 0.6 9.0 21.8 | history1 history1 | history2 history2 |



OIL ANALYSIS REPORT



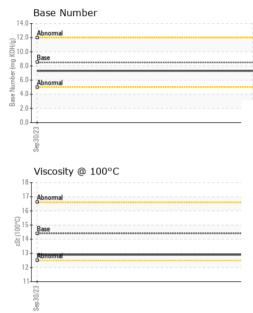

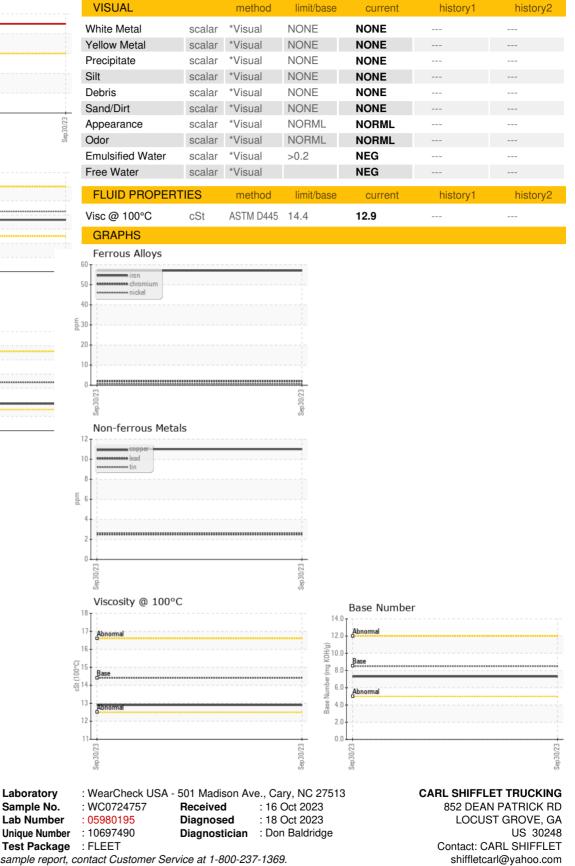

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory

Sample No.

Lab Number

F:

T: (770)375-7576