




# OIL ANALYSIS REPORT

Sample Rating Trend

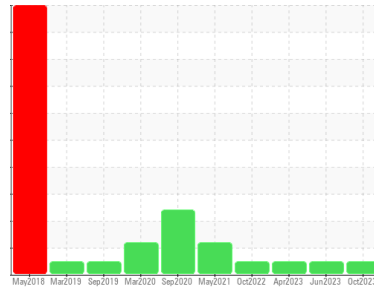

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CHEVROLET GASOLINE 040697**  
 Component  
**Gasoline Engine**  
 Fluid  
**MOBIL MOBIL1 SAE 5W20 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0004858</b>	SBP0004513	SBP0003747
Sample Date	Client Info		<b>11 Oct 2023</b>	22 Jun 2023	07 Apr 2023
Machine Age	hrs	Client Info	<b>4657</b>	4220	3805
Oil Age	hrs	Client Info	<b>437</b>	415	281
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>150	<b>10</b>	6	6
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>4</b>	4	1
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>155	<b>1</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>30</b>	30	79
Barium	ppm	ASTM D5185m		<b>4</b>	4	0
Molybdenum	ppm	ASTM D5185m		<b>67</b>	60	74
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>483</b>	452	566
Calcium	ppm	ASTM D5185m		<b>1219</b>	1212	1357
Phosphorus	ppm	ASTM D5185m		<b>615</b>	607	713
Zinc	ppm	ASTM D5185m		<b>767</b>	764	888
Sulfur	ppm	ASTM D5185m		<b>2331</b>	2690	3133

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	<b>19</b>	15	13
Sodium	ppm	ASTM D5185m	>400	<b>3</b>	3	1
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.1</b>	11.2	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>27.3</b>	26.7	21.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.5</b>	24.5	15.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>2.2</b>	3.8	2.6







# OIL ANALYSIS REPORT

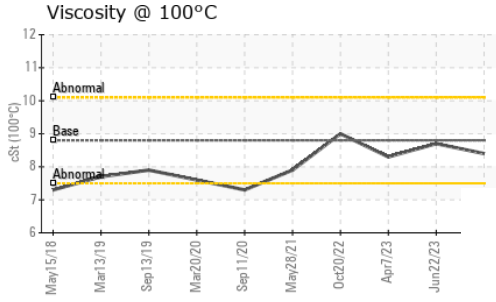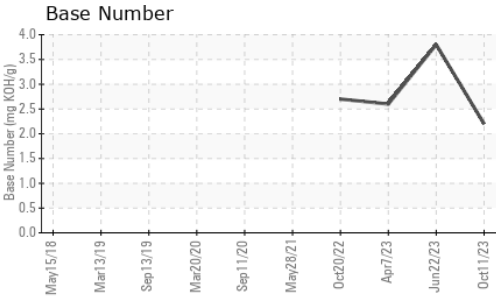

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 8.8	<b>8.4</b>	8.7	8.3

## GRAPHS

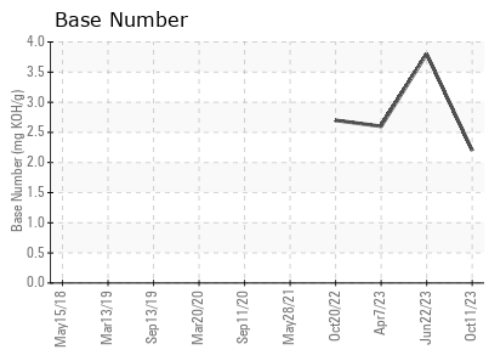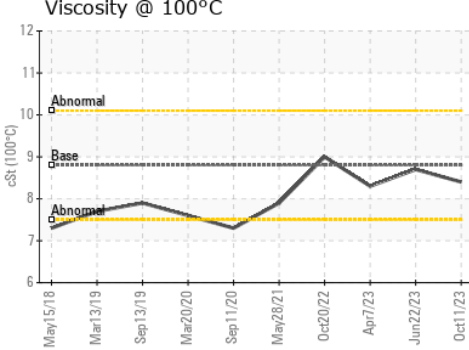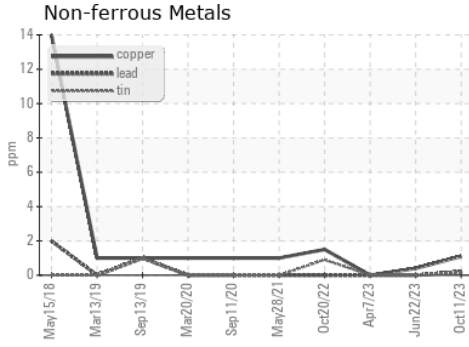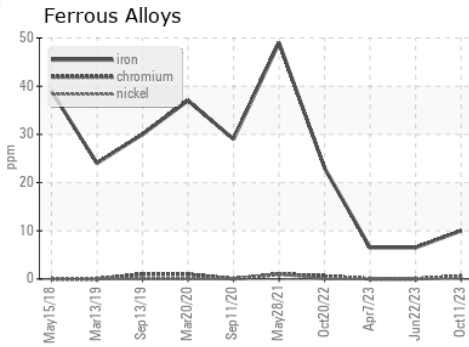

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004858 **Received** : 16 Oct 2023  
**Lab Number** : **05980288** **Diagnosed** : 18 Oct 2023  
**Unique Number** : 10697583 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)