


Machine Id CR1225 Component Hydraulic System Fluid NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

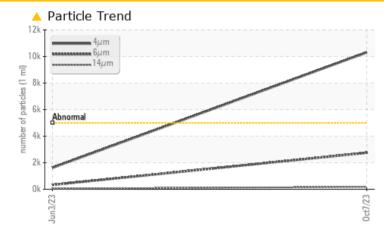

RECOMMENDATION

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	
Particles >4µm	ASTM D7647 >5000	<u> </u>	1614	
Particles >6µm	ASTM D7647 >1300	A 2750	330	
Particles >14µm	ASTM D7647 >160	<u> </u>	44	
Oil Cleanliness	ISO 4406 (c) >19/17	/14 🔺 21/19/15	18/16/13	

Customer Id: BUCWILTX Sample No.: WC0810438 Lab Number: 05980338 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED A	COMMENDED ACTIONS				
Action	Status	Date	Done By	Description	
Resample			?	We recommend an early resample to monitor this condition.	
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the component make and model with your next sample.	

HISTORICAL DIAGNOSIS



03 Jun 2023 Diag: Don Baldridge

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

SAMPLE INFORMATION method

Sample Rating Trend

limit/base

Linger Contraction of the second second

current

ISO

history2

history1

Machine Id CR1225 Component Hydraulic System Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


SAWFLE INFOR	VIATION	method	IIIIII/Dase	current	TIIStOLA	TIIStOLY2
Sample Number		Client Info		WC0810438	WC0784857	
Sample Date		Client Info		07 Oct 2023	03 Jun 2023	
Machine Age	hrs	Client Info		908	158	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				ABNORMAL	NORMAL	
- -						
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	<1	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	2	2	
Copper	ppm	ASTM D5185m		12	7	
Tin	ppm	ASTM D5185m		0	0	
Vanadium	ppm	ASTM D5185m	210	0	0	
Cadmium		ASTM D5185m		0	0	
	ppm	ASTIVI DOTODIII		U	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		0	0	
Calcium	ppm	ASTM D5185m		26	17	
Phosphorus	ppm	ASTM D5185m		33	86	
Zinc	ppm	ASTM D5185m		117	107	
Sulfur	ppm	ASTM D5185m		738	849	
CONTAMINANTS		method	limit/base		biotonyt	history
					history1	history2
Silicon	ppm	ASTM D5185m	>20	2	1	
Sodium	ppm	ASTM D5185m		<1	1	
Potassium	ppm	ASTM D5185m	>20	1	0	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u> </u>	1614	
Particles >6µm		ASTM D7647	>1300	<u> </u>	330	
Particles >14µm		ASTM D7647	>160	<u> </u>	44	
Particles >21µm		ASTM D7647	>40	39	16	
Particles >38µm		ASTM D7647	>10	2	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u> </u>	18/16/13	
FLUID DEGRAD		method	limit/base	current	history1	history2
			millbase			
Acid Number (AN)	mg KOH/g	ASTM D8045		0.15	0.20	





Acid Number

OIL ANALYSIS REPORT


Non-ferrous Metals




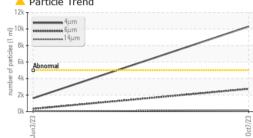

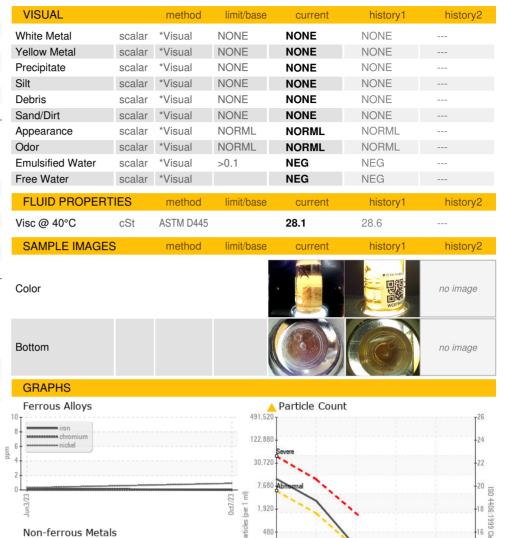

480

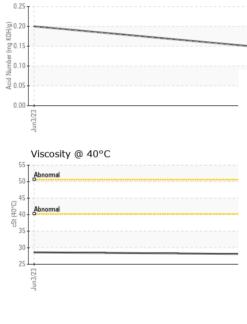

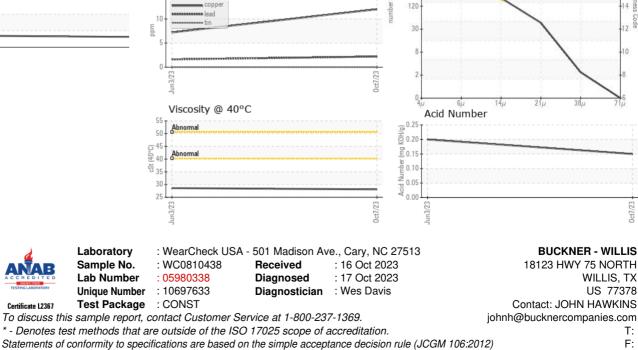

Certificate L2367

T:

F:

14