




# OIL ANALYSIS REPORT

Sample Rating Trend

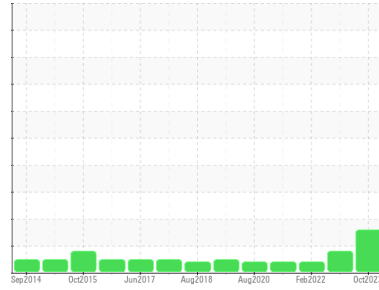

ISO



Machine Id  
**LINE 7 (S/N 991405-5-082)**

Component  
**Hydraulic System**

Fluid  
**SUNOCO SUNVIS 846 ISO 46 (55 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0827125</b>	WC0760805	WC0651798
Sample Date	Client Info		<b>05 Oct 2023</b>	29 Nov 2022	04 Feb 2022
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status			<b>ABNORMAL</b>	ATTENTION	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>60	<b>0</b>	2	7
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	3
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>1</b>	6	11
Calcium	ppm	ASTM D5185m		<b>67</b>	80	82
Phosphorus	ppm	ASTM D5185m		<b>278</b>	376	363
Zinc	ppm	ASTM D5185m		<b>445</b>	477	454
Sulfur	ppm	ASTM D5185m		<b>4505</b>	4307	1180

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	<b>▲ 1491</b>	▲ 1694	▲ 2173
Particles >6µm	ASTM D7647	>320	<b>▲ 698</b>	105	72
Particles >14µm	ASTM D7647	>80	<b>▲ 112</b>	7	12
Particles >21µm	ASTM D7647	>20	<b>28</b>	2	5
Particles >38µm	ASTM D7647	>4	<b>1</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>17/15/13	<b>▲ 18/17/14</b>	▲ 18/14/10	▲ 18/13/11




# OIL ANALYSIS REPORT


### Particle Trend

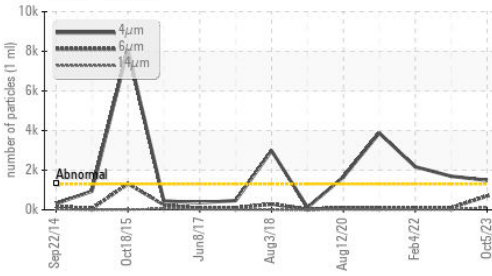


### Particle Trend

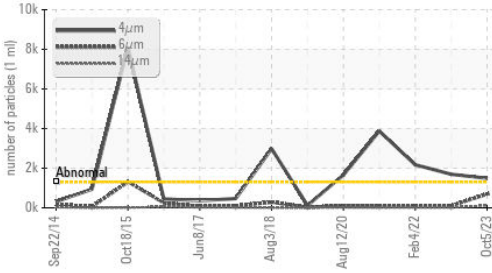

### Acid Number

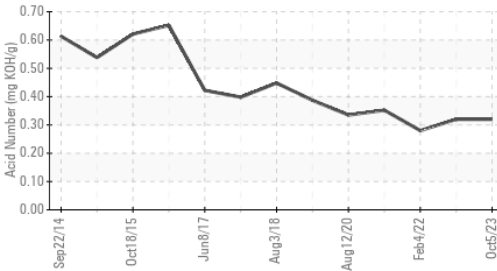

### Viscosity @ 40°C

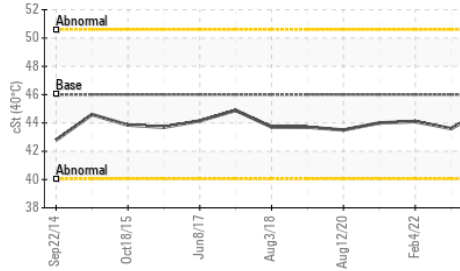


### FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN) mg KOH/g	ASTM D8045	<b>0.32</b>	0.32	0.28		
VISUAL						
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 40°C	cSt	ASTM D445	46.0	<b>45.0</b>	43.6	44.1

### SAMPLE IMAGES

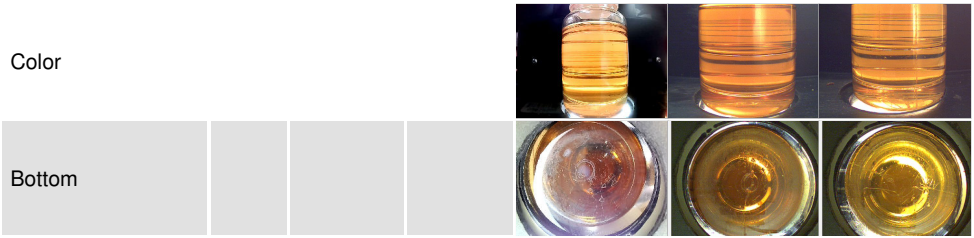


### GRAPHS


#### Ferrous Alloys

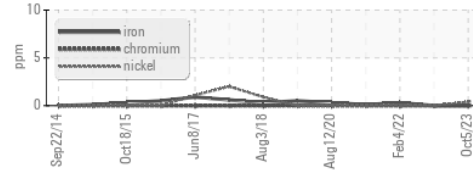


#### Non-ferrous Metals

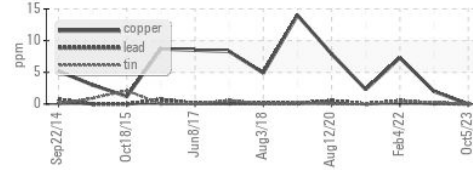


#### Viscosity @ 40°C

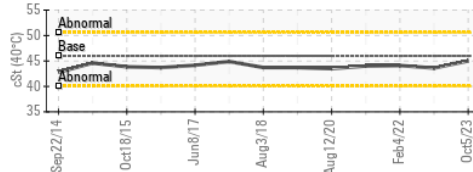

#### Particle Count

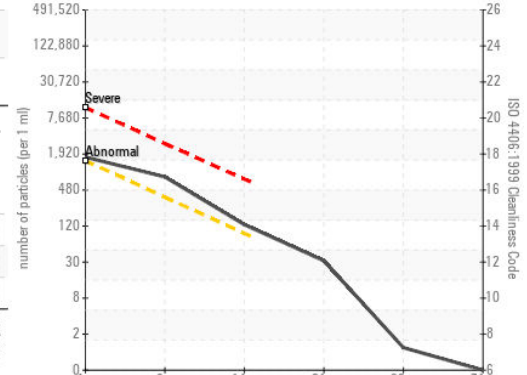

#### Acid Number

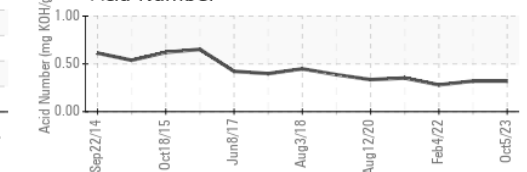

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0827125  
 Lab Number : 05980350  
 Unique Number : 10697645  
 Test Package : IND 2

Altium Packaging - ALLENTOWN - Plant 1034A  
 6831 RUPPSVILLE RD  
 ALLENTOWN, PA  
 US 18106  
 Contact: JIM BUCHANAN  
 james.buchanan@altiumpkg.com  
 T: (610)597-6530  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)