




OIL ANALYSIS REPORT

Sample Rating Trend

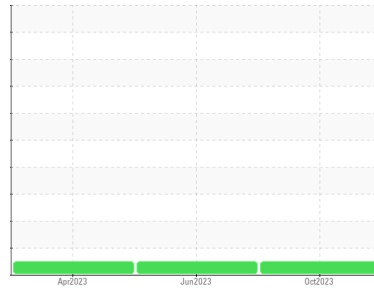

NORMAL



Machine Id
FORD GERBER TRANSPORT

Component
Diesel Engine

Fluid
MEGA MOLY PREM 15W40 ALPHA (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843371	WC0800730	WC0800717
Sample Date	Client Info		12 Oct 2023	21 Jun 2023	10 Apr 2023
Machine Age	mls	Client Info	196334	10926	0
Oil Age	mls	Client Info	15000	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	73	27	20
Chromium	ppm	ASTM D5185m >20	2	<1	0
Nickel	ppm	ASTM D5185m >4	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	<1	<1	0
Aluminum	ppm	ASTM D5185m >20	17	7	3
Lead	ppm	ASTM D5185m >40	12	3	<1
Copper	ppm	ASTM D5185m >330	2	1	0
Tin	ppm	ASTM D5185m >15	1	<1	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	7	25
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	104	87	69
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	8	18	18
Calcium	ppm	ASTM D5185m	4701	4192	3817
Phosphorus	ppm	ASTM D5185m	1126	983	1046
Zinc	ppm	ASTM D5185m	1329	994	1173
Sulfur	ppm	ASTM D5185m	4856	5014	4468

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	6	7
Sodium	ppm	ASTM D5185m	2	2	0
Potassium	ppm	ASTM D5185m >20	5	2	3

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	10.8	8.4	8.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	44.5	39.7	34.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	44.2	41.2	35.0
Acid Number (AN)	mg KOH/g	ASTM D8045	5.508	1.80	1.86
Base Number (BN)	mg KOH/g	ASTM D2896	10.47	10.68	14.28











OIL ANALYSIS REPORT

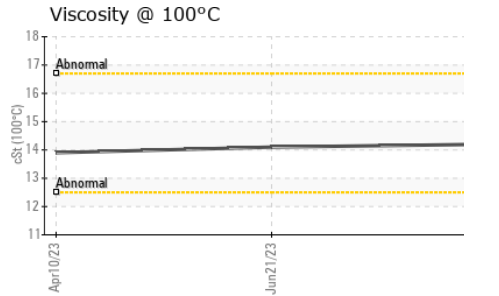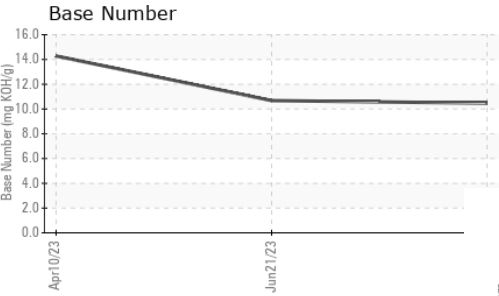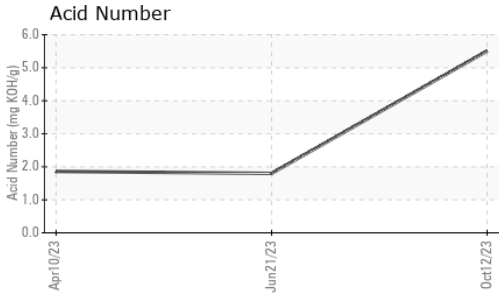

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.2	14.1	13.9

GRAPHS

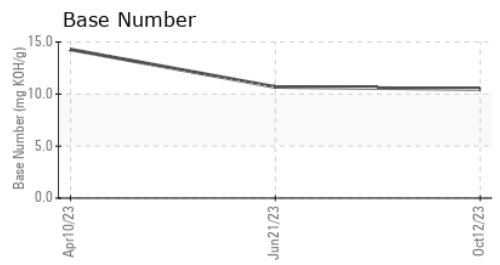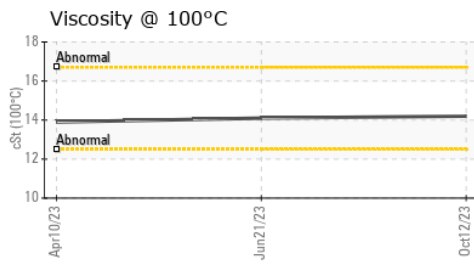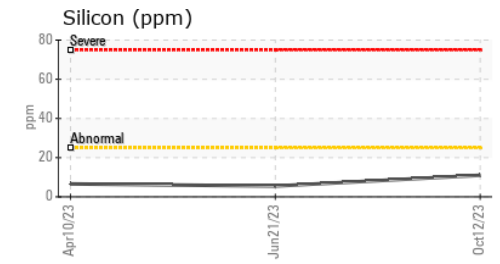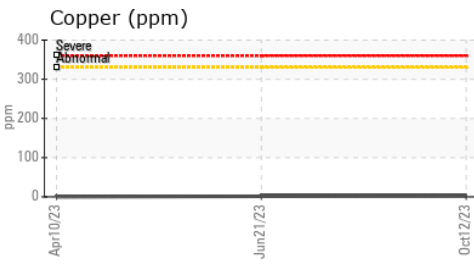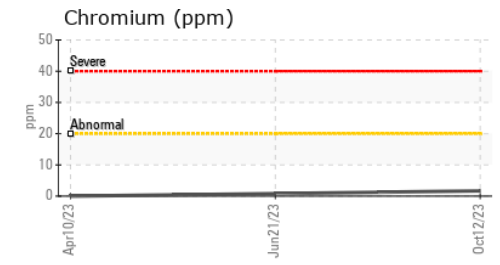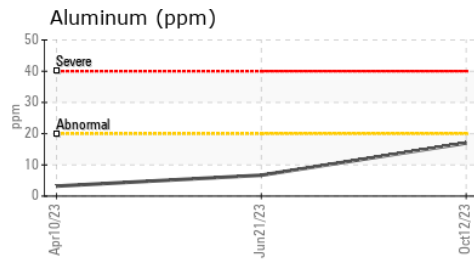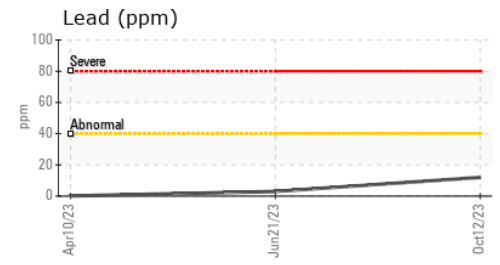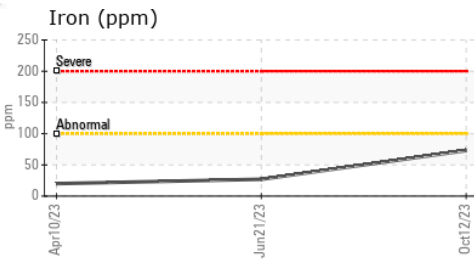

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843371 **Received** : 16 Oct 2023
Lab Number : 05980604 **Diagnosed** : 18 Oct 2023
Unique Number : 10697899 **Diagnostician** : Jonathan Hester
Test Package : MOB 2

POWER SYSTEMS & SUPPLY
 10381 S 800 W
 WAVELAND, IN
 US 47989
 Contact: MELVIN KING
 PSS5070@YAHOO.COM
 T: (765)435-3733
 F: (765)344-1749

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)