



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
FORD FORD - GERBER TRANSPORT

Component
Diesel Engine

Fluid
MEGA MOLY PREM 15W40 ALPHA (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843371	---	---
Sample Date	Client Info		12 Oct 2023	---	---
Machine Age	mls	Client Info	196334	---	---
Oil Age	mls	Client Info	15000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	73	---	---
Chromium	ppm	ASTM D5185m >20	2	---	---
Nickel	ppm	ASTM D5185m >4	<1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	<1	---	---
Aluminum	ppm	ASTM D5185m >20	17	---	---
Lead	ppm	ASTM D5185m >40	12	---	---
Copper	ppm	ASTM D5185m >330	2	---	---
Tin	ppm	ASTM D5185m >15	1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	104	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	8	---	---
Calcium	ppm	ASTM D5185m	4701	---	---
Phosphorus	ppm	ASTM D5185m	1126	---	---
Zinc	ppm	ASTM D5185m	1329	---	---
Sulfur	ppm	ASTM D5185m	4856	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	5	---	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	44.5	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	44.2	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	5.508	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.47	---	---











OIL ANALYSIS REPORT

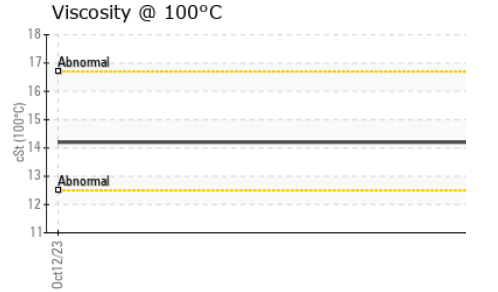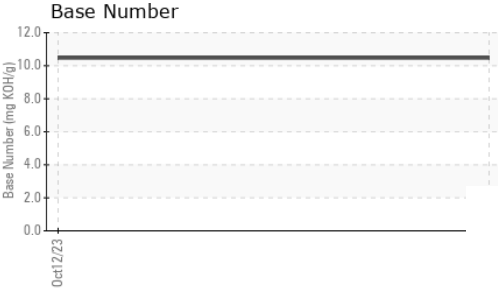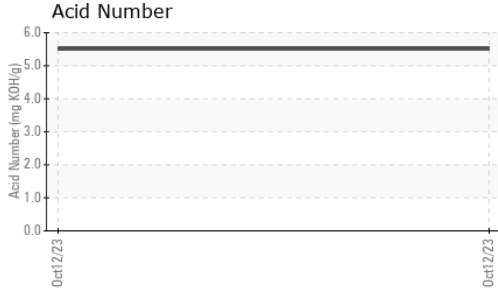

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.2	---	---

GRAPHS

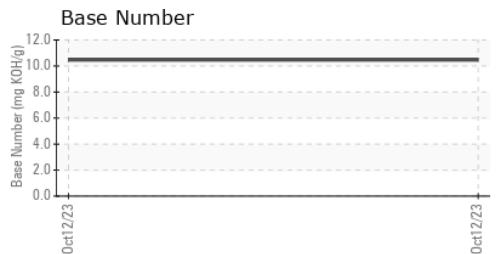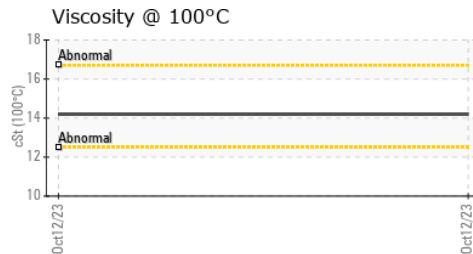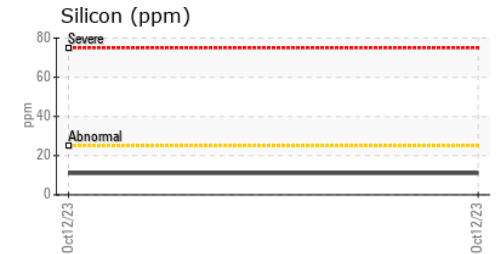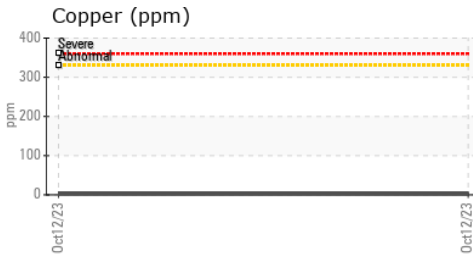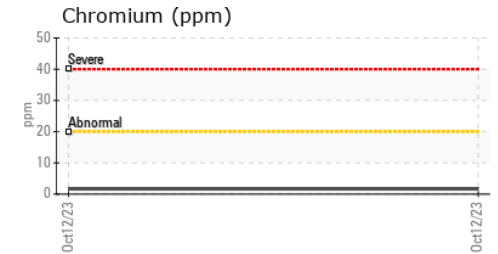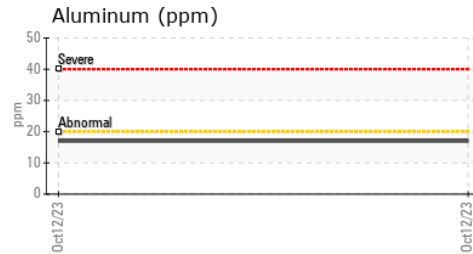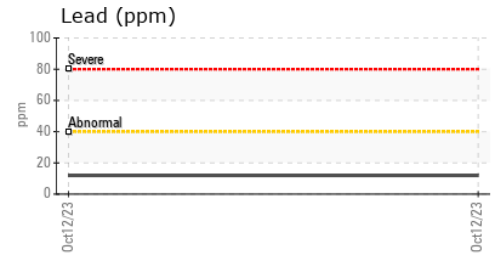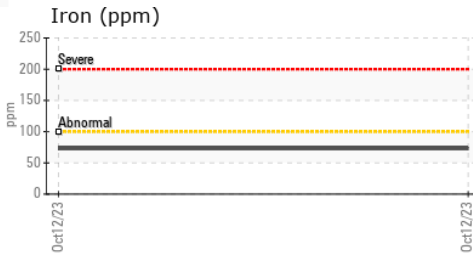

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0843371 Received : 16 Oct 2023
 Lab Number : 05980604 Diagnosed : 18 Oct 2023
 Unique Number : 10697899 Diagnostician : Jonathan Hester
 Test Package : MOB 2

POWER SYSTEMS & SUPPLY
 10381 S 800 W
 WAVELAND, IN
 US 47989
 Contact: MELVIN KING
 PSS5070@YAHOO.COM
 T: (765)435-3733
 F: (765)344-1749

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)