

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER 7116384

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA007791	KCP35006	KCP40362		
Sample Date		Client Info		06 Oct 2023	27 Jun 2023	28 Dec 2022		
Machine Age	hrs	Client Info		32022	30291	26563		
Oil Age	hrs	Client Info		0	26563	6514		
Oil Changed		Client Info		N/A	Not Changd	Changed		
Sample Status				NORMAL	ABNORMAL	ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	<1	0		
Chromium	ppm	ASTM D5185m	>10	0	0	0		
Nickel	ppm	ASTM D5185m	>3	0	<1	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum	ppm	ASTM D5185m		0	0	0		
Lead		ASTM D5185m	>10	0	0	0		
	ppm							
Copper	ppm	ASTM D5185m		8	8	8		
Tin	ppm	ASTM D5185m	>10	0	0	0		
Antimony	ppm	ASTM D5185m						
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	0	0	0		
Barium	ppm	ASTM D5185m	90	0	0	0		
Molybdenum	ppm	ASTM D5185m	0	0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m	100	0	0	0		
Calcium	ppm	ASTM D5185m	0	0	0	0		
Phosphorus	ppm	ASTM D5185m	0	0	0	0		
Zinc	ppm	ASTM D5185m	0	0	0	0		
Sulfur	ppm	ASTM D5185m	23500	14047	19095	20627		
CONTAMINANTS		method	limit/base	-	history1	history2		
Silicon	ppm	ASTM D5185m	>25	12	5	2		
Sodium	ppm	ASTM D5185m		<1	0	<1		
Potassium	ppm	ASTM D5185m		0	<1	0		
Water	%	ASTM D6304	>0.05	0.008	0.006	0.005		
ppm Water	ppm	ASTM D6304	>500	87.5	60.2	55.3		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		1437	12399	11231		
Particles >6µm		ASTM D7647	>1300	482	4 505	<u> </u>		
Particles >14µm		ASTM D7647	>80	32	A 381	A 285		
Particles >21µm		ASTM D7647	>20	9	<mark>▲</mark> 92	<u> </u>		
Particles >38µm		ASTM D7647	>4	1	2	5		
Particles >71µm		ASTM D7647	>3	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	1 /19/16	▲ 21/19/15		
FLUID DEGRADA		method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.50	0.49	0.47		
:52:21) Rev: 1	3 9		-		Contact/Location: JG THORTON - UNIDA			


Report Id: UNIDAV [WUSCAR] 05981265 (Generated: 10/19/2023 10:52:21) Rev: 1


Contact/Location: JG THORTON - UNIDAV



OIL ANALYSIS REPORT

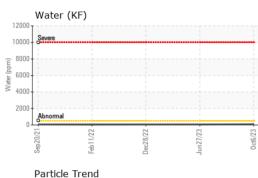


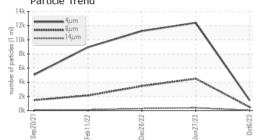

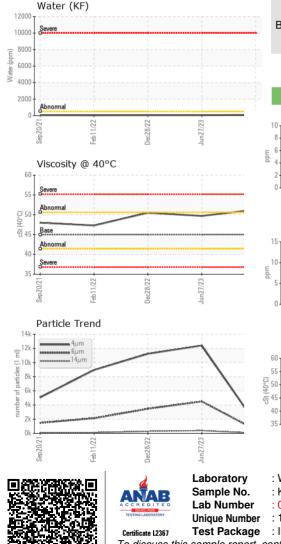

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	51.3	49.7	50.5
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					J.	
Dettern					1	

Bottom

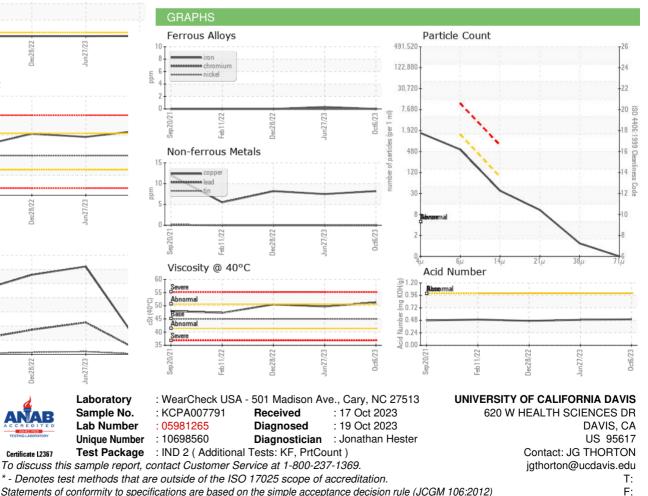

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)