




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

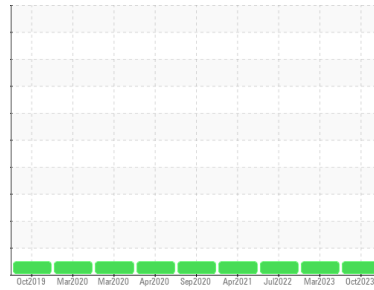

Area  
**Watkins Block Truck Shop Omaha**  
 Machine Id  
**60 [Watkins Block Truck Shop Omaha]**  
 Component  
**Middle Natural Gas Engine**  
 Fluid  
**MOBIL SUPER 5W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0005008</b>	SBP0002198	SBP0000238
Sample Date	Client Info		<b>12 Oct 2023</b>	29 Mar 2023	05 Jul 2022
Machine Age	hrs	Client Info	<b>13025</b>	12232	11590
Oil Age	hrs	Client Info	<b>378</b>	331	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		---	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>21</b>	17	15
Chromium	ppm	ASTM D5185m >4	<b>5</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>10</b>	3	5
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>50</b>	140	35
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>74</b>	76	166
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>550</b>	603	507
Calcium	ppm	ASTM D5185m	<b>1286</b>	1445	1393
Phosphorus	ppm	ASTM D5185m	<b>716</b>	744	681
Zinc	ppm	ASTM D5185m	<b>897</b>	974	898
Sulfur	ppm	ASTM D5185m	<b>3314</b>	3806	2431

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>20</b>	13	14
Sodium	ppm	ASTM D5185m	<b>5</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	1
Chlorine	ppm	ASTM D5185m	---	---	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	7.8	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.5</b>	17.2	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.1</b>	9.5	11.0
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.2</b>	5.5	5.8







# OIL ANALYSIS REPORT

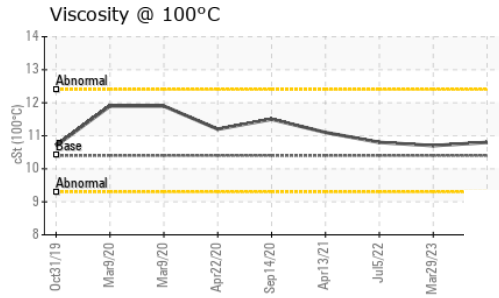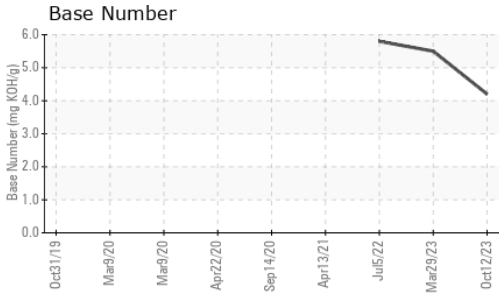

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.4	<b>10.8</b>	10.7	10.8

## GRAPHS

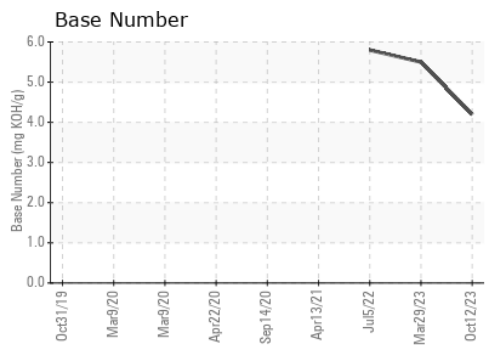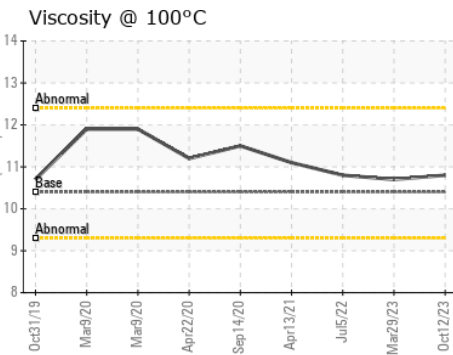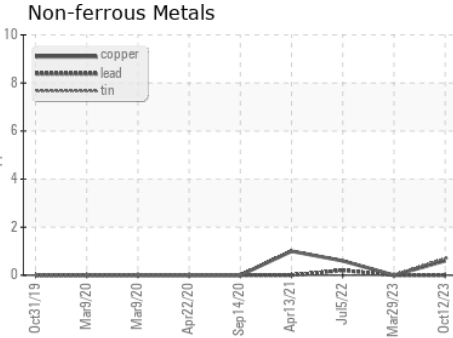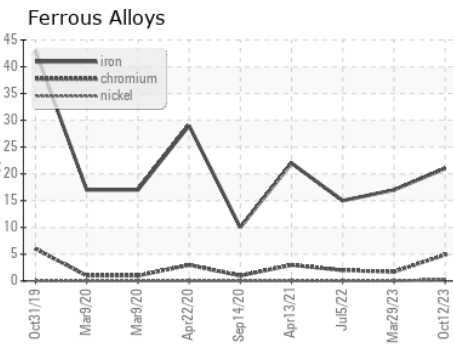

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005008 **Received** : 17 Oct 2023  
**Lab Number** : **05981819** **Diagnosed** : 19 Oct 2023  
**Unique Number** : 10699114 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**Watkins Block Truck Shop Omaha - 602227**  
 14306 Giles Rd  
 Omaha, NE  
 US 68138  
 Contact: Dave Hozba  
 daveh@watkinsconcreteblock.com  
 T: (402)894-6518  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)