




PROBLEM SUMMARY

Sample Rating Trend

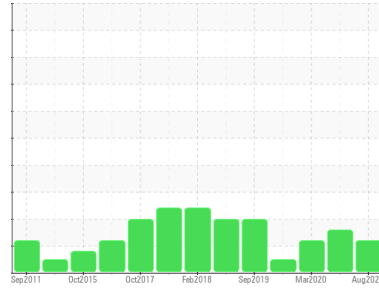


ISO



Area
JOHN M DONNELLY
 Machine Id
[JOHN M DONNELLY] 010 621298-10
 Component
Steering
 Fluid
CHEVRON RANDO HDZ 68 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

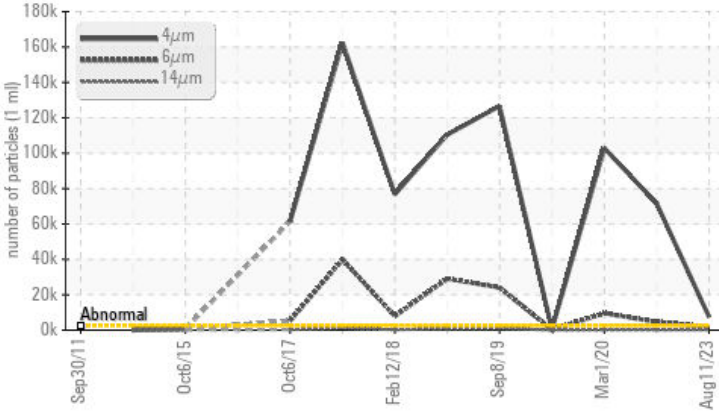

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>2500	▲ 7590	▲ 71604	▲ 102778
Particles >6µm	ASTM D7647	>640	▲ 1721	▲ 4638	▲ 9495
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 20/18/13	▲ 23/19/14	▲ 24/20/14

Customer Id: INGPAD
 Sample No.: MW0017913
 Lab Number: 05981881
 Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

18 Aug 2020 Diag: Doug Bogart

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the fluid. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



01 Mar 2020 Diag: Doug Bogart

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the fluid. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



23 Dec 2019 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

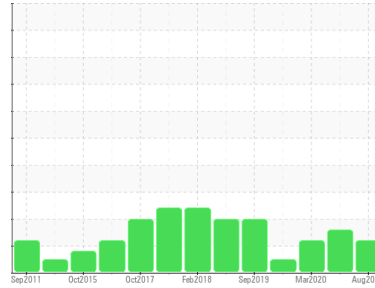

ISO



Area
JOHN M DONNELLY
 Machine Id
[JOHN M DONNELLY] 010 621298-10
 Component
Steering
 Fluid
CHEVRON RANDO HDZ 68 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	MW0017913	MWM5046335	MWM720466
Sample Date	Client Info	11 Aug 2023	18 Aug 2020	01 Mar 2020
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	8760	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	0	4	5
Chromium	ppm	ASTM D5185m >15	0	<1	<1
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	<1	<1
Aluminum	ppm	ASTM D5185m >5	0	0	0
Lead	ppm	ASTM D5185m >10	0	<1	<1
Copper	ppm	ASTM D5185m >50	<1	11	12
Tin	ppm	ASTM D5185m >5	0	<1	<1
Antimony	ppm	ASTM D5185m	---	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	<1	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	0	1	1
Barium	ppm	ASTM D5185m 0	3	0	<1
Molybdenum	ppm	ASTM D5185m 0	0	<1	<1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 0	0	0	<1
Calcium	ppm	ASTM D5185m 75	55	59	69
Phosphorus	ppm	ASTM D5185m 275	374	392	398
Zinc	ppm	ASTM D5185m 350	492	532	563
Sulfur	ppm	ASTM D5185m 550	1020	1009	1024

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<1	0	2
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m >20	2	<1	0

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >2500	▲ 7590	▲ 71604	▲ 102778
Particles >6µm	ASTM D7647 >640	▲ 1721	▲ 4638	▲ 9495
Particles >14µm	ASTM D7647 >80	73	▲ 101	▲ 93
Particles >21µm	ASTM D7647 >20	18	▲ 27	16
Particles >38µm	ASTM D7647 >4	1	3	1
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >18/16/13	▲ 20/18/13	▲ 23/19/14	▲ 24/20/14


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	0.471	0.472




OIL ANALYSIS REPORT


Particle Trend

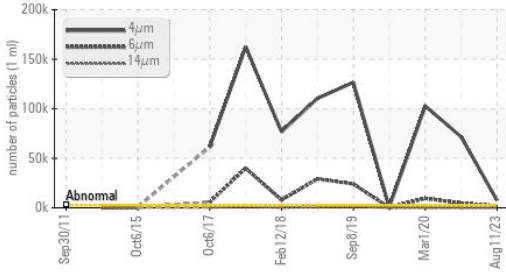


Particle Trend

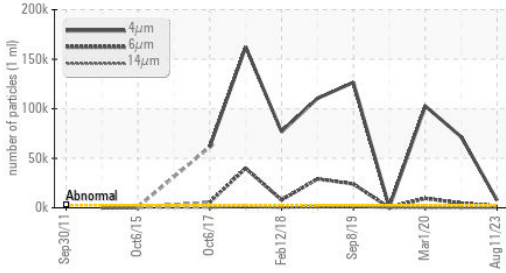

Acid Number

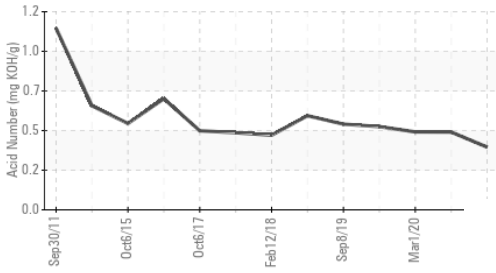


Viscosity @ 40°C

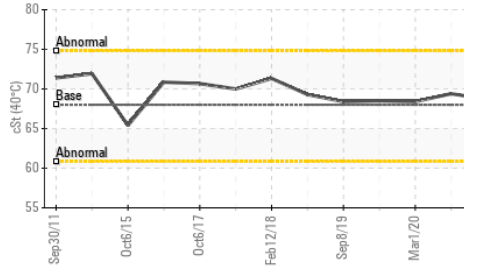





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.0	68.7	69.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

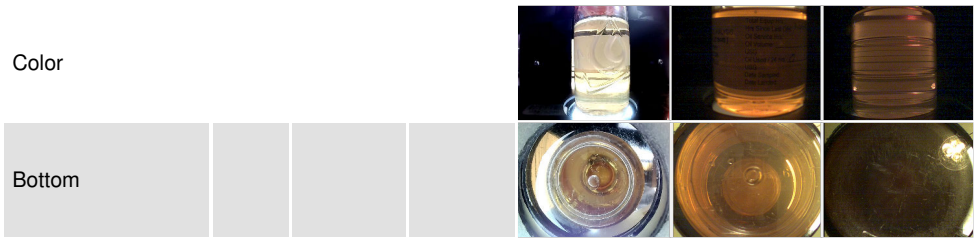

GRAPHS

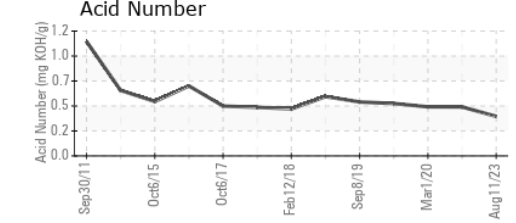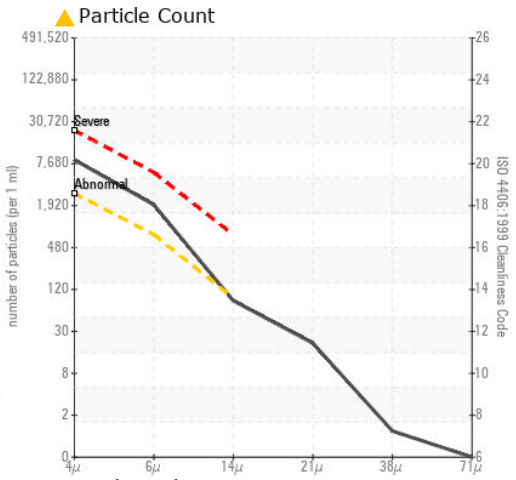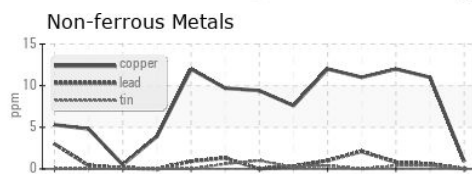

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0017913 **Received** : 17 Oct 2023
Lab Number : 05981881 **Diagnosed** : 19 Oct 2023
Unique Number : 10699176 **Diagnostician** : Don Baldrige
Test Package : MAR 2 (Additional Tests: PrtCount)

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003
 Contact: ALLEN WILLHELM
 allen.willhelm@ingrambarga.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)