

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area WP 09 Machine Id WP09TF01 3EFF MVR

Component Reservoir Circulating System Fluid MOBIL DTE 25 (93 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.








SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0834876	WC0843039	WC0843038
Sample Date		Client Info		10 Oct 2023	02 Oct 2023	25 Sep 2023
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		0	1	<1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m		0	<1	0
Copper	ppm	ASTM D5185m		0	2	2
Tin	ppm	ASTM D5185m		0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		3	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	2	1
Calcium	ppm	ASTM D5185m		90	110	110
Phosphorus	ppm	ASTM D5185m		449	476	474
Zinc	ppm	ASTM D5185m		650	704	721
Sulfur	ppm	ASTM D5185m		2363	3252	3030
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		1	2	2
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	2	1	<1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	331		6 131
Particles >6µm		ASTM D7647	>1300	94		535
Particles >14µm		ASTM D7647	>160	11		1
Particles >21µm		ASTM D7647	>40	3		0
Particles >38µm		ASTM D7647	>10	0		0
Particles >71µm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/11		▲ 20/16/7
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.81	0.92	0.87




OIL ANALYSIS REPORT










	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	🔺 MILKY	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual		NEG	▲ 0.2%	▲ 0.2%
	Free Water	scalar	*Visual		NEG	NEG	NEG
	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	44.2	47.9	49.3	48.6
	SAMPLE IMAGES	;	method	limit/base	current	history1	history2
	Color						
	D			1		()	

Bottom

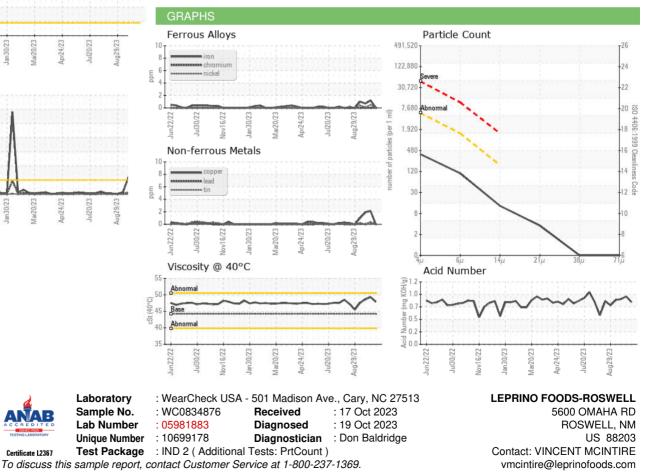

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: VINCENT MCINTIRE

Page 2 of 2

F: (505)347-5728

T: