


## **PROBLEM SUMMARY**


# Sample Rating Trend WATER


CHILLER 1 - AUGUSTA

Chiller Fluid NOT GIVEN (--- GAL)

#### COMPONENT CONDITION SUMMARY

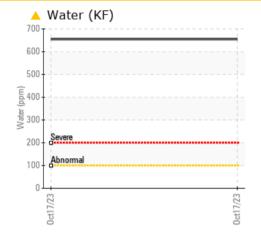

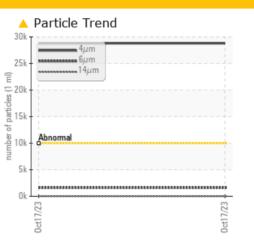

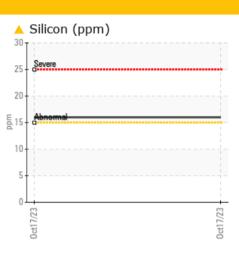

#### RECOMMENDATION

We recommend an early resample to monitor this condition. Please specify the brand and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS									
Sample Status		ABNORMAL							
Silicon	ppm	ASTM D5185m	>15	<u> </u>					
Water	%	ASTM D6304	>0.01	<b>0.065</b>					
ppm Water	ppm	ASTM D6304	>100	<u> </u>					
Particles >4µm		ASTM D7647	>10000	🔺 28791					
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>A</b> 22/18/11					

Customer Id: XAEMID Sample No.: WC05981956 Lab Number: 05981956 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Resample			?	We recommend an early resample to monitor this condition.	
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.	

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

Sample Rating Trend

WATER

# CHILLER 1 - AUGUSTA

Chiller Fluid NOT GIVEN (--- GAL)

#### DIAGNOSIS

#### Recommendation

We recommend an early resample to monitor this condition. Please specify the brand and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil. There is a light concentration of water present in the oil. Elemental level of silicon (Si) above normal.

#### Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC05981956		
Sample Date		Client Info		17 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>3	0		
Lead	ppm	ASTM D5185m	>2	0		
Copper	ppm	ASTM D5185m	>8	0		
Tin		ASTM D5185m	>0 >4	0		
	ppm		>4			
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		3		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		6		
Zinc	ppm	ASTM D5185m		5		
Sulfur	ppm	ASTM D5185m		5		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>1</b> 6		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304		<u> </u>		
ppm Water	ppm	ASTM D6304		▲ 654.8		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>28791</b>		
Particles >4µm		ASTM D7647	>10000	<b>A</b> 28791		
Particles >4μm Particles >6μm		ASTM D7647 ASTM D7647	>10000 >2500	▲ 28791 1580		
Particles >4μm Particles >6μm Particles >14μm		ASTM D7647 ASTM D7647 ASTM D7647	>10000 >2500 >320	28791 1580 15		
Particles >4μm Particles >6μm Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>10000 >2500 >320 >80	▲ 28791 1580 15 2		
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>10000 >2500 >320 >80 >20	<ul> <li>28791</li> <li>1580</li> <li>15</li> <li>2</li> <li>0</li> </ul>		
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>10000 >2500 >320 >80 >20 >4	<ul> <li>28791</li> <li>1580</li> <li>15</li> <li>2</li> <li>0</li> <li>0</li> </ul>	  	  
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>10000 >2500 >320 >80 >20 >4 >20/18/15	<ul> <li>28791</li> <li>1580</li> <li>15</li> <li>2</li> <li>0</li> </ul>		
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>10000 >2500 >320 >80 >20 >4	<ul> <li>28791</li> <li>1580</li> <li>15</li> <li>2</li> <li>0</li> <li>0</li> </ul>		  



🔺 Silicon (ppm)

3

10

0

30

25

2

E 1

10

0.02

0.01

E 0.01

Ē 0.01

0.00

0.00

0.01

(B/HO) 0.01 Det1

# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

method

\*Visual

\*Visual

\*Visua

\*Visual

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

NONE

current

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

current

current

NEG

NEG

103

history1

history

history1

no image

no image


history2

history2


history2

no image

no imade

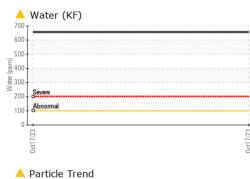



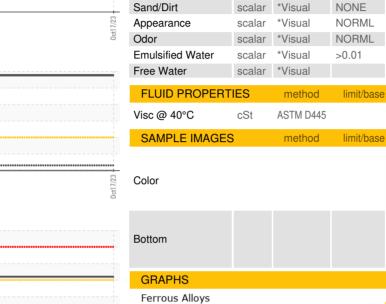

VISUAL

White Metal

Yellow Metal

Precipitate

Silt

Debris

