




PROBLEM SUMMARY


Sample Rating Trend

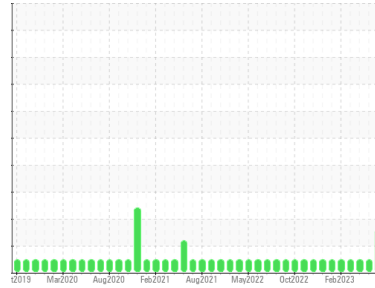

Area
SALLY BROMFIELD
Machine Id
[SALLY BROMFIELD] 002 501709-2
Component
Center Main Engine
Fluid
CHEVRON DELO 710 LE (320 GAL)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

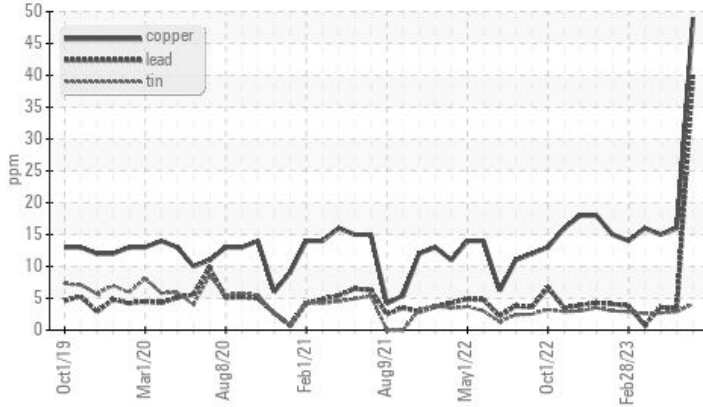

RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Lead	ppm	ASTM D5185m	>18	▲ 40	3	4
Copper	ppm	ASTM D5185m	>80	▲ 49	16	15

Customer Id: INGPAD
Sample No.: MW0052598
Lab Number: 05982039
Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

01 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



01 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



01 Apr 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

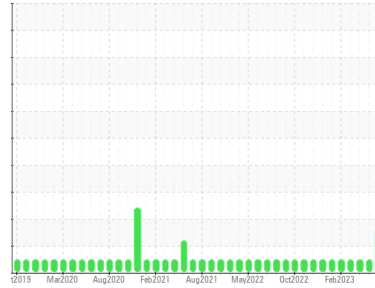

WEAR



Area
SALLY BROMFIELD
 Machine Id
[SALLY BROMFIELD] 002 501709-2
 Component
Center Main Engine
 Fluid
CHEVRON DELO 710 LE (320 GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

▲ Wear

Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	MW0052598	MW0052448	MW0052577
Sample Date	Client Info	01 Oct 2023	01 Jun 2023	01 May 2023
Machine Age	hrs	29596	29465	29134
Oil Age	hrs	7738	7607	7476
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	17	15	14
Chromium	ppm ASTM D5185m >8	1	2	1
Nickel	ppm ASTM D5185m >2	2	0	<1
Titanium	ppm ASTM D5185m >3	<1	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	2	1	<1
Lead	ppm ASTM D5185m >18	▲ 40	3	4
Copper	ppm ASTM D5185m >80	▲ 49	16	15
Tin	ppm ASTM D5185m >14	4	3	3
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	41	46	39
Barium	ppm ASTM D5185m	3	0	0
Molybdenum	ppm ASTM D5185m	49	50	49
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	18	16	14
Calcium	ppm ASTM D5185m	3681	3990	3701
Phosphorus	ppm ASTM D5185m	11	11	6
Zinc	ppm ASTM D5185m 10	28	0	8
Sulfur	ppm ASTM D5185m	2611	3017	2382

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	4	4	4
Sodium	ppm ASTM D5185m >75	4	1	0
Potassium	ppm ASTM D5185m >20	4	<1	1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.3	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	8.3	9.7	8.5
Sulfation	Abs/.1mm *ASTM D7415 >30	16.2	17.8	15.7


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	8.4	10.1	9.2
Base Number (BN)	mg KOH/g ASTM D2896 9.2	10.06	9.67	8.76




OIL ANALYSIS REPORT

▲ Non-ferrous Metals

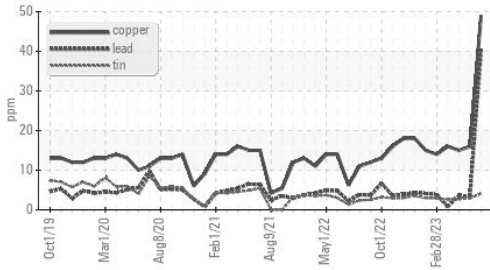

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

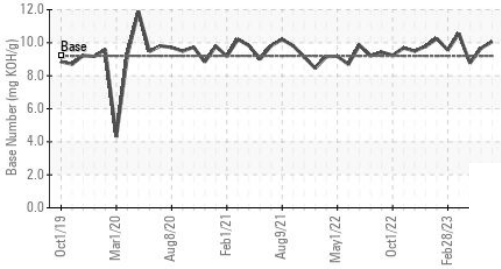


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	14.9	14.8

GRAPHS


Ferrous Alloys

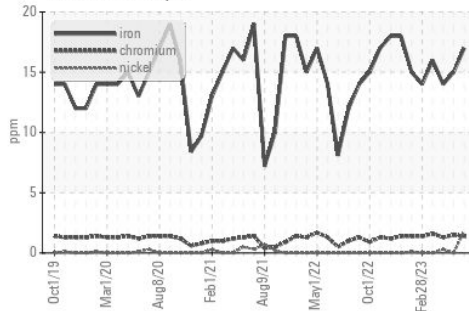


Viscosity @ 100°C

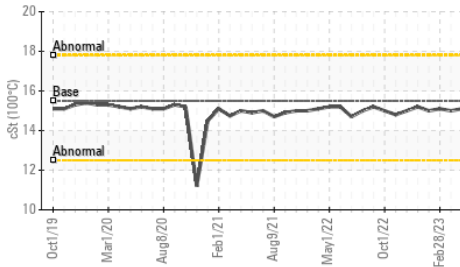


▲ Non-ferrous Metals

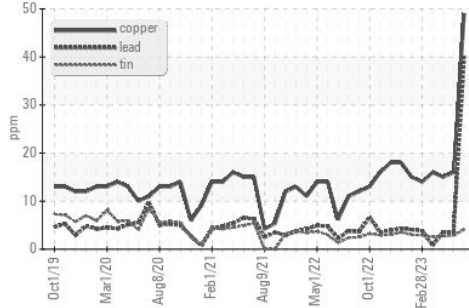

Viscosity @ 100°C

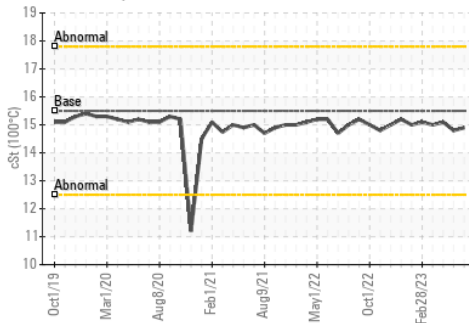

Base Number

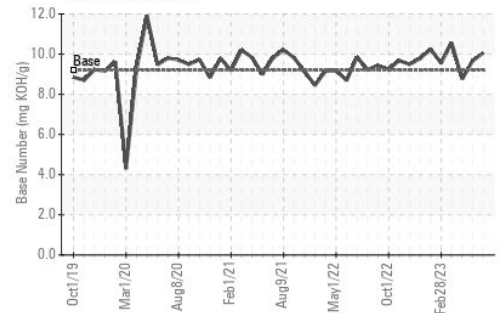

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : MW0052598 Received : 17 Oct 2023
 Lab Number : 05982039 Diagnosed : 19 Oct 2023
 Unique Number : 10699334 Diagnostician : Jonathan Hester
 Test Package : MAR 2

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: GLENN ELLIS
 glen.ellis@ingrambarga.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)