




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

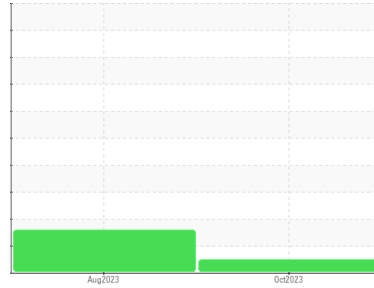

Area  
**Store 8 - Pikeville [143988]**  
 Machine Id  
**HAMM H12I WGH0H284JHAA00516**  
 Component  
**Diesel Engine**  
 Fluid  
**WIRTGEN GROUP LOW SAPS 10W30 (2 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>LEC0040763</b>	LEC0040754	---
Sample Date	Client Info	<b>13 Oct 2023</b>	09 Aug 2023	---
Machine Age	hrs Client Info	<b>649</b>	521	---
Oil Age	hrs Client Info	<b>128</b>	521	---
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	---
Sample Status		<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>14</b>	46	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	3	---
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	---
Titanium	ppm ASTM D5185m	<b>0</b>	<1	---
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	---
Aluminum	ppm ASTM D5185m >20	<b>3</b>	6	---
Lead	ppm ASTM D5185m >40	<b>0</b>	2	---
Copper	ppm ASTM D5185m >330	<b>4</b>	22	---
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>244</b>	70	---
Barium	ppm ASTM D5185m	<b>0</b>	9	---
Molybdenum	ppm ASTM D5185m	<b>243</b>	91	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	2	---
Magnesium	ppm ASTM D5185m	<b>747</b>	408	---
Calcium	ppm ASTM D5185m	<b>1484</b>	2066	---
Phosphorus	ppm ASTM D5185m	<b>901</b>	1022	---
Zinc	ppm ASTM D5185m	<b>1087</b>	1251	---
Sulfur	ppm ASTM D5185m	<b>3042</b>	3657	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >120	<b>15</b>	▲ 36	---
Sodium	ppm ASTM D5185m	<b>2</b>	0	---
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	4	---



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.4	---
Nitration	Abs/cm *ASTM D7624 >20	<b>7.1</b>	8.5	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.7</b>	19.5	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.7</b>	15.5	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>9.6</b>	7.4	---





# OIL ANALYSIS REPORT

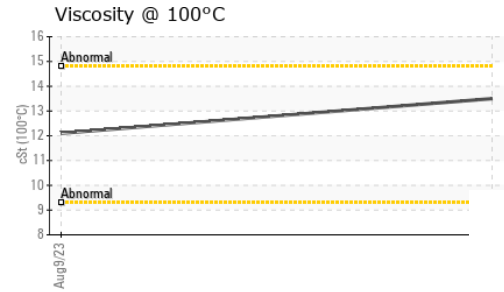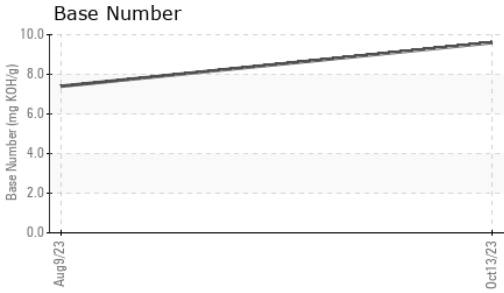

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.5</b>	12.1	---

## GRAPHS

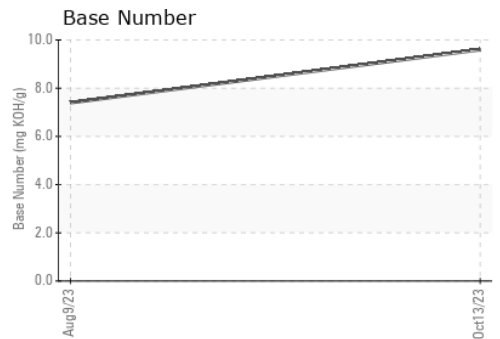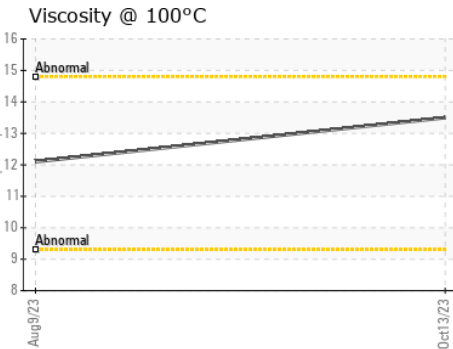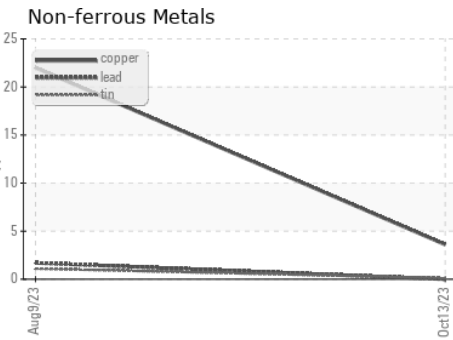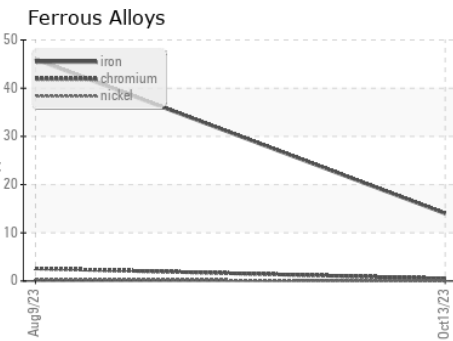

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0040763 **Received** : 18 Oct 2023  
**Lab Number** : **05982263** **Diagnosed** : 19 Oct 2023  
**Unique Number** : 10699558 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)