

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area [W47346] Machine Id JOHN DEERE 824K 1DW824KXTHF680767 Component

Hydraulic System

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

SAMPLE INFORM	NATION	method	limit/base	current	history1	history2
Sample Number		Client Info		JR0180427	JR0180152	JR0165429
Sample Date		Client Info		16 Oct 2023	30 Aug 2023	09 Jun 202
Machine Age	hrs	Client Info		8567	8140	7459
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Chango
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>50	19	21	17
Iron	ppm	ASTM D5185m	>71	28	27	26
Chromium	ppm	ASTM D5185m	>11	32	33	31
Nickel	ppm	ASTM D5185m	>6	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>11	4	4	4
Lead	ppm	ASTM D5185m	>13	0	0	0
Copper	ppm	ASTM D5185m	>21	11	11	11
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		31	33	16
Barium	ppm	ASTM D5185m		0	7	0
Molybdenum	ppm	ASTM D5185m		23	24	11
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		165	166	132
Calcium	ppm	ASTM D5185m		577	535	513
Phosphorus	ppm	ASTM D5185m		669	627	634
Zinc	ppm	ASTM D5185m		879	847	861
Sulfur	ppm	ASTM D5185m		1978	2217	2264
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>24	4	4	4
Sodium	ppm	ASTM D5185m	>21	5	5	6
Potassium	ppm	ASTM D5185m	>20	<1	<1	2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history
Particles >4µm		ASTM D7647	>80000	21585	17115	15909
Particles >6µm		ASTM D7647		283	90	142
Particles >14µm		ASTM D7647	>640	11	13	26
Particles >21µm		ASTM D7647	>160	4	4	9
		ASTM D7647	>40	0	0	1
Particles >38µm		LOTH DEAK	>10	0	0	0
Particles >38µm Particles >71µm		ASTM D7647	>10	U		0
•		ASTM D7647 ISO 4406 (c)	>23/19/16	0 22/15/11	21/14/11	
Particles >71µm	TION					21/14/12 history2

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination


The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



OIL ANALYSIS REPORT






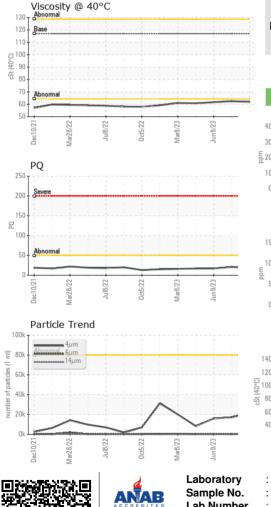

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	117	61.9	62.5	61.7
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color						
				1111	11 Aller	1

Bottom

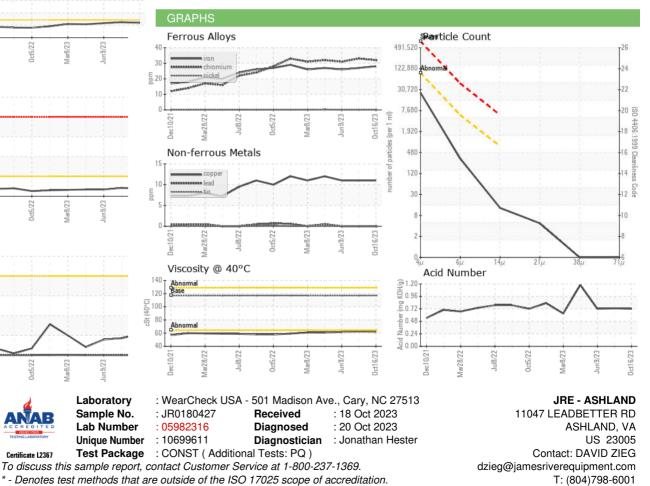

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DAVID ZIEG - JAMASH

F: (804)798-0292