




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

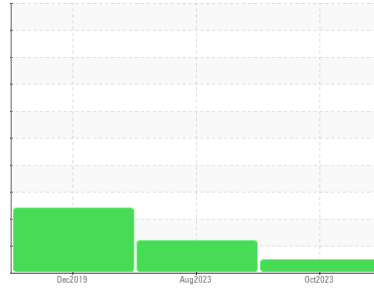

Area
Extrusion
 Machine Id
Press 5 Press Hydraulic Unit Oil (S/N 81546)
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (3487 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0038258	RP0024728	RP0000919
Sample Date	Client Info		13 Oct 2023	25 Aug 2023	23 Dec 2019
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	3	4	▲ 41
Chromium	ppm	ASTM D5185m >20	0	0	<1
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	0	<1	0
Lead	ppm	ASTM D5185m >20	0	<1	3
Copper	ppm	ASTM D5185m >20	6	7	13
Tin	ppm	ASTM D5185m >20	0	0	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	18	29	<1
Barium	ppm	ASTM D5185m 5	0	2	0
Molybdenum	ppm	ASTM D5185m 5	22	35	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m 25	43	56	2
Calcium	ppm	ASTM D5185m 200	172	234	26
Phosphorus	ppm	ASTM D5185m 300	352	357	259
Zinc	ppm	ASTM D5185m 370	422	446	298

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	<1	<1
Sodium	ppm	ASTM D5185m	<1	0	<1
Potassium	ppm	ASTM D5185m >20	2	6	2
Water	%	ASTM D6304 >0.05	0.005	0.007	0.004
ppm Water	ppm	ASTM D6304 >500	51.0	79.4	43.5






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	2333	▲ 18447	▲ 239679
Particles >6µm	ASTM D7647	>1300	660	▲ 2514	▲ 146339
Particles >14µm	ASTM D7647	>160	105	109	▲ 3925
Particles >21µm	ASTM D7647	>40	42	27	▲ 235
Particles >38µm	ASTM D7647	>10	4	1	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	18/17/14	▲ 21/19/14	▲ 25/24/19

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.43	0.47	0.357


OIL ANALYSIS REPORT

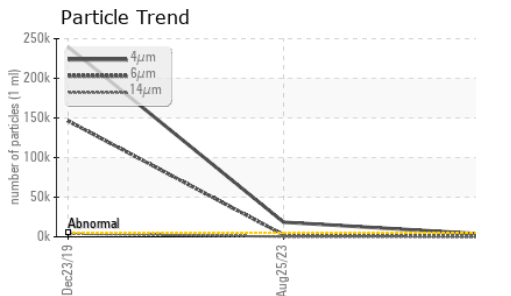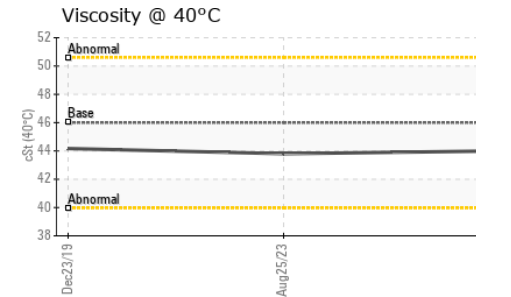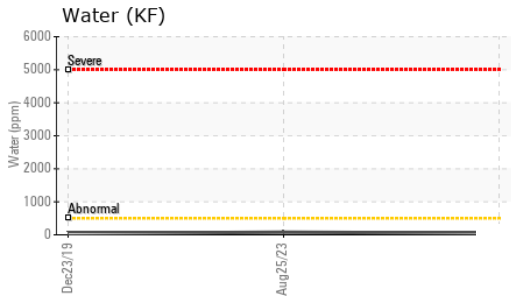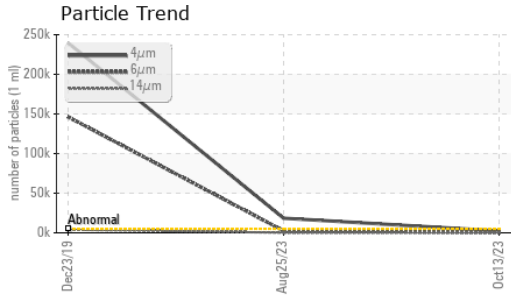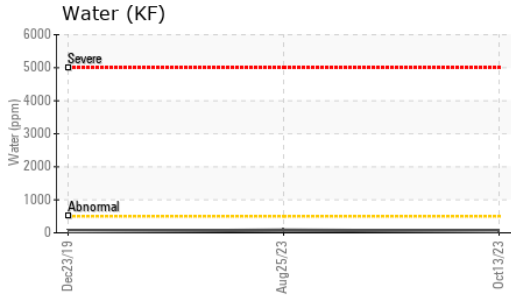






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.0	43.8	44.17

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

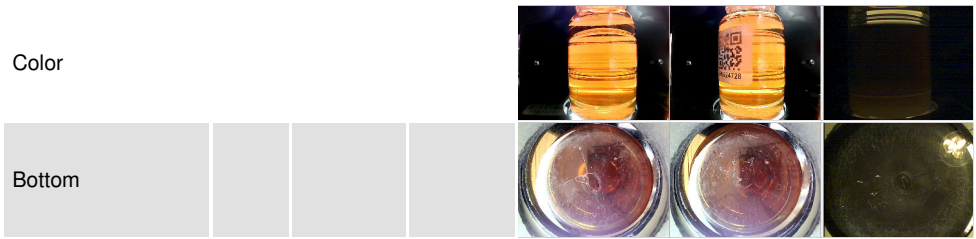

GRAPHS

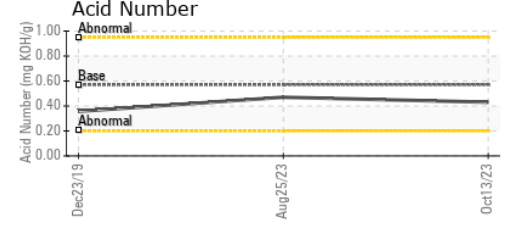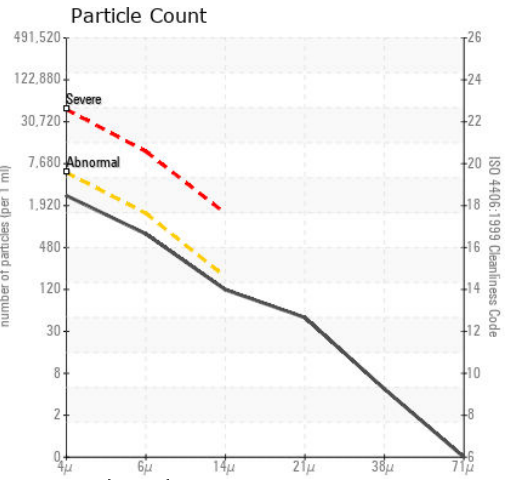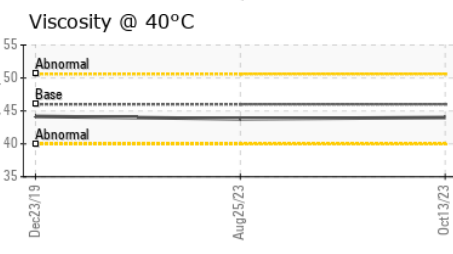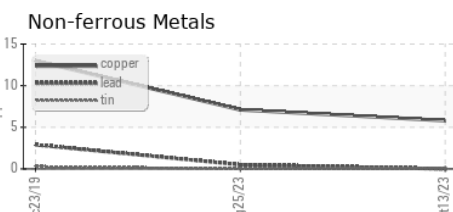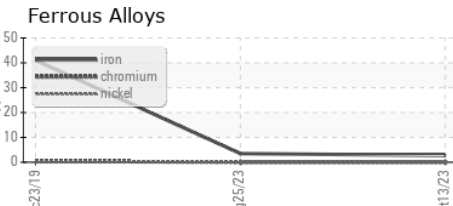

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0038258 **Received** : 18 Oct 2023
Lab Number : 05982371 **Diagnosed** : 20 Oct 2023
Unique Number : 10699666 **Diagnostician** : Angela Borella
Test Package : IND 2

WESTERN EXTRUSIONS CORPORATION
 1735 SANDY LAKE RD
 CARROLLTON, TX
 US 75006
 Contact: SCOTT WESTFALL
 swestfall@WesternExtrusions.Com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)