

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SK 26 1816974 (S/N 1180)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system is acceptable. There is no indication of any contamination in the component.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Apr2017	AprŹ018 FebŹ020	Jul2021 Jun2022	0ct2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007817	KCP51202	KCP33216
Sample Date		Client Info		11 Oct 2023	01 Jun 2022	27 Jul 2021
Machine Age	hrs	Client Info		42141	40466	39565
Oil Age	hrs	Client Info		0	901	2052
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	1	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m		3	5	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium		ASTM D5185m		0	0	0
	ppm			-	-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	25
Barium	ppm	ASTM D5185m	90	0	33	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	0	56	0
Calcium	ppm	ASTM D5185m	0	0	3	0
Phosphorus	ppm	ASTM D5185m	0	0	<1	<1
Zinc	ppm	ASTM D5185m	0	0	5	0
Sulfur	ppm	ASTM D5185m	23500	18709	17551	17045
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	nnm	ASTM D5185m			0.4	0
	ppm	ASTIVI DOTODITI		<1	24	0
Potassium	ppm	ASTM D5185m	>20	<1 0	24 5	0
			>20 >0.05			
Water	ppm	ASTM D5185m		0	5	0
Water	ppm % ppm	ASTM D5185m ASTM D6304	>0.05	0 0.008	5 0.012	0 0.008
Water ppm Water FLUID CLEANLIN	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304	>0.05 >500	0 0.008 80.3	5 0.012 125.8	0 0.008 81.3
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method	>0.05 >500 limit/base	0 0.008 80.3 current	5 0.012 125.8 history1	0 0.008 81.3 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	0 0.008 80.3 current 1220	5 0.012 125.8 history1	0 0.008 81.3 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0 0.008 80.3 <u>current</u> 1220 376 32	5 0.012 125.8 history1 	0 0.008 81.3 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0 0.008 80.3 <u>current</u> 1220 376 32 12	5 0.012 125.8 history1 	0 0.008 81.3 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0 0.008 80.3 <u>current</u> 1220 376 32 12 12 1	5 0.012 125.8 history1 	0 0.008 81.3 history2
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0 0.008 80.3 <u>current</u> 1220 376 32 12	5 0.012 125.8 history1 	0 0.008 81.3 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm % ppm ESS	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>0.05 >500 limit/base >1300 >80 >20 >4 >3 >/17/13	0 0.008 80.3 1220 376 32 12 12 1 0 17/16/12	5 0.012 125.8 history1 	0 0.008 81.3 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm % ppm ESS	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	0 0.008 80.3 current 1220 376 32 12 12 1 0	5 0.012 125.8 history1 	0 0.008 81.3 history2


Report Id: PEDFOR [WUSCAR] 05982390 (Generated: 10/20/2023 10:20:41) Rev: 1


Contact/Location: SERVICE MANAGER ? - PEDFOR



OIL ANALYSIS REPORT

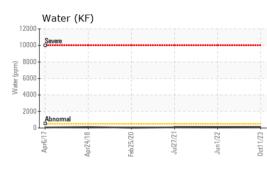

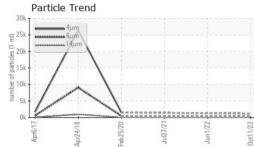

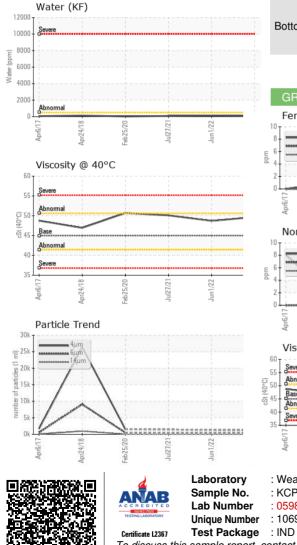

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	A MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.7	48.7	50.1
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Bottom

