




PROBLEM SUMMARY

Sample Rating Trend

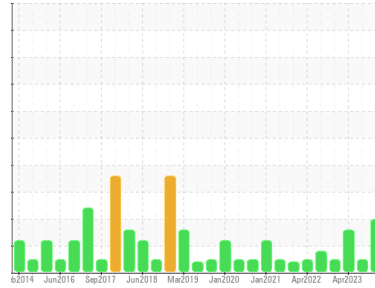

ISO




Machine Id
KAESER ASD25T 4645459 (S/N 1081)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

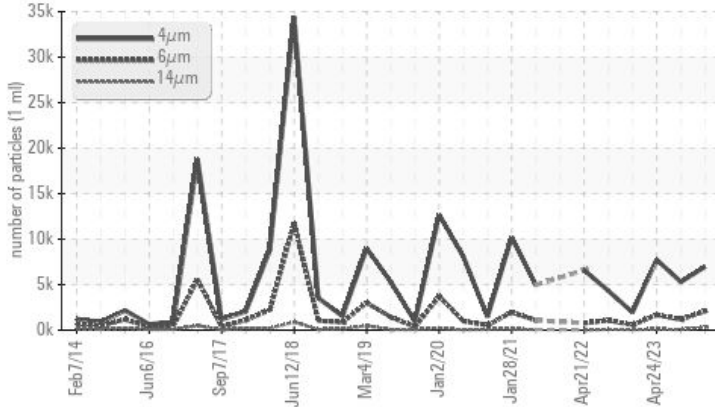

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ABNORMAL | NORMAL | ATTENTION |
|-----------------|--------------|-----------|------------|----------|------------|
| Particles >6µm | ASTM D7647 | >1300 | ▲ 2083 | 1176 | ▲ 1684 |
| Particles >14µm | ASTM D7647 | >80 | ▲ 305 | 62 | ▲ 101 |
| Particles >21µm | ASTM D7647 | >20 | ▲ 134 | 15 | ▲ 26 |
| Particles >38µm | ASTM D7647 | >4 | ▲ 18 | 1 | 1 |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 20/18/15 | 20/17/13 | ▲ 20/18/14 |

Customer Id: ACCNEWKC
Sample No.: KC05982401
Lab Number: 05982401
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

14 Jul 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



24 Apr 2023 Diag: Doug Bogart

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



10 Jan 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report



Machine Id
KAESER ASD25T 4645459 (S/N 1081)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

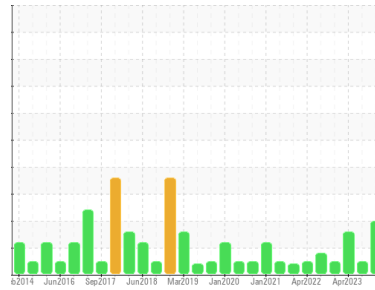

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | KC05982401 | KC100513 | KC101516 |
| Sample Date | Client Info | 10 Oct 2023 | 14 Jul 2023 | 24 Apr 2023 |
| Machine Age | hrs | 47930 | 46745 | 45704 |
| Oil Age | hrs | 0 | 3000 | 6000 |
| Oil Changed | Client Info | N/A | Not Changd | Changed |
| Sample Status | | ABNORMAL | NORMAL | ATTENTION |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|----------|------------|-----------------|----------|----------|----|
| Iron | ppm | ASTM D5185m >50 | 0 | <1 | 0 |
| Chromium | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >10 | 0 | <1 | 0 |
| Lead | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >50 | 6 | 5 | 14 |
| Tin | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|----------------|--------------|----------|----|
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m 90 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m 90 | 2 | 12 | <1 |
| Calcium | ppm | ASTM D5185m 2 | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | <1 | 0 | 0 |
| Zinc | ppm | ASTM D5185m | 18 | 28 | 4 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|------------------|--------------|----------|-------|
| Silicon | ppm | ASTM D5185m >25 | 0 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | 1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 1 | 1 |
| Water | % | ASTM D6304 >0.05 | 0.005 | 0.007 | 0.003 |
| ppm Water | ppm | ASTM D6304 >500 | 55.7 | 76.7 | 33.1 |






FLUID CLEANLINESS

| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|-------------------|----------|------------|
| Particles >4µm | ASTM D7647 | 6967 | 5294 | 7741 |
| Particles >6µm | ASTM D7647 >1300 | ▲ 2083 | 1176 | ▲ 1684 |
| Particles >14µm | ASTM D7647 >80 | ▲ 305 | 62 | ▲ 101 |
| Particles >21µm | ASTM D7647 >20 | ▲ 134 | 15 | ▲ 26 |
| Particles >38µm | ASTM D7647 >4 | ▲ 18 | 1 | 1 |
| Particles >71µm | ASTM D7647 >3 | 3 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >--/17/13 | ▲ 20/18/15 | 20/17/13 | ▲ 20/18/14 |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|------------------|------------|----------------|-------------|----------|------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.4 | 0.36 | 0.37 | 0.36 |

OIL ANALYSIS REPORT

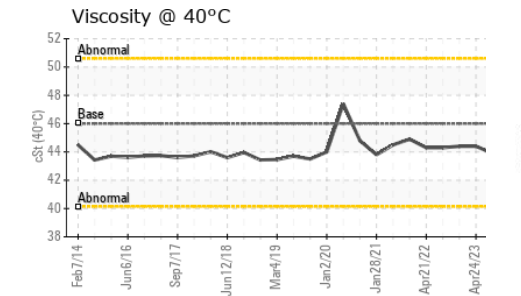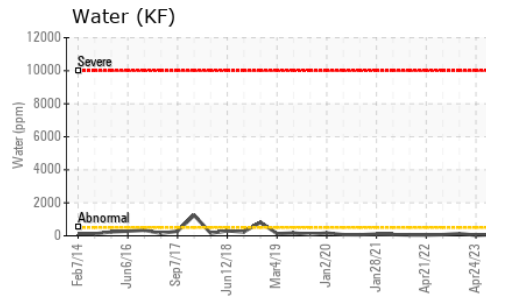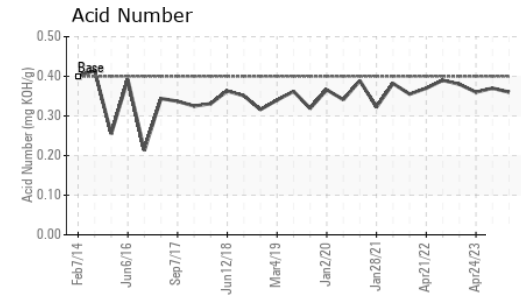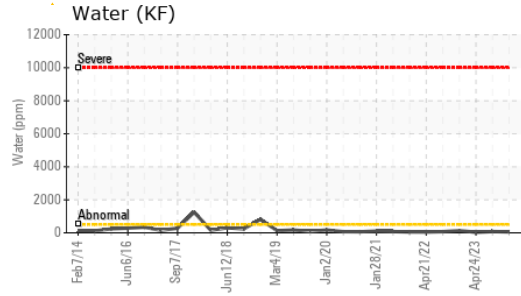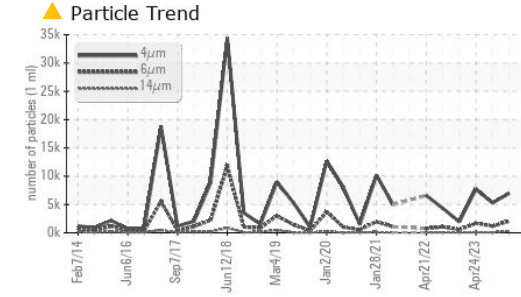





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 46 | 44.0 | 43.9 | 44.4 |

SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color | | | | |
| Bottom | | | | |

GRAPHS

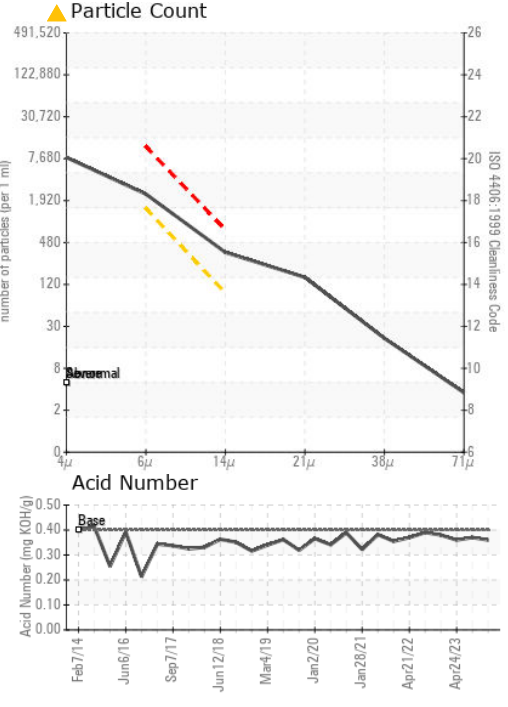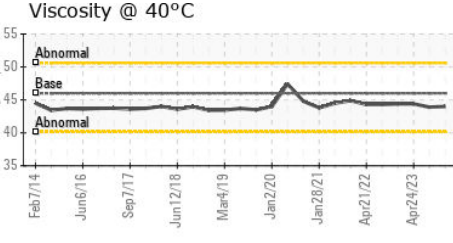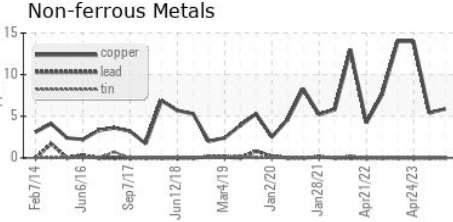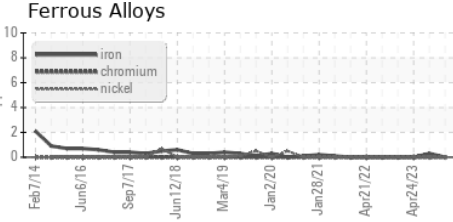

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC05982401
Lab Number : 05982401
Unique Number : 10699696
Test Package : IND 2

ACCRO TOOL ENTERPRISES
 401 HUNT VALLEY DR
 NEW KENSINGTON, PA
 US 15068
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: