



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area


S-460 [6871]

Machine Id

KAESER 1.9760.30030 - STURTEVANT RICHMOND (S/N 1810678)

Component

Compressor

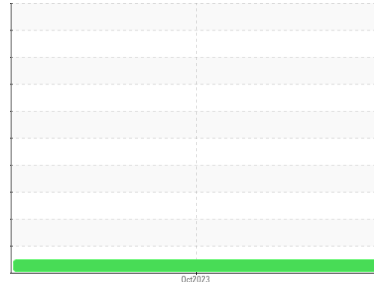

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	UCH05982452	---	---
Sample Date	Client Info	07 Oct 2023	---	---
Machine Age	hrs Client Info	34929	---	---
Oil Age	hrs Client Info	200	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	0	---	---
Chromium ppm	ASTM D5185m >10	0	---	---
Nickel ppm	ASTM D5185m >3	0	---	---
Titanium ppm	ASTM D5185m >3	0	---	---
Silver ppm	ASTM D5185m >2	0	---	---
Aluminum ppm	ASTM D5185m >10	0	---	---
Lead ppm	ASTM D5185m >10	0	---	---
Copper ppm	ASTM D5185m >50	6	---	---
Tin ppm	ASTM D5185m >10	0	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	0	---	---
Barium ppm	ASTM D5185m 90	0	---	---
Molybdenum ppm	ASTM D5185m	0	---	---
Manganese ppm	ASTM D5185m	0	---	---
Magnesium ppm	ASTM D5185m 90	5	---	---
Calcium ppm	ASTM D5185m 2	0	---	---
Phosphorus ppm	ASTM D5185m	3	---	---
Zinc ppm	ASTM D5185m	0	---	---
Sulfur ppm	ASTM D5185m	17655	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	<1	---	---
Sodium ppm	ASTM D5185m	2	---	---
Potassium ppm	ASTM D5185m >20	0	---	---

FLUID DEGRADATION



method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.4	0.30	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal scalar	*Visual NONE	NONE	---	---
Yellow Metal scalar	*Visual NONE	NONE	---	---
Precipitate scalar	*Visual NONE	NONE	---	---
Silt scalar	*Visual NONE	NONE	---	---
Debris scalar	*Visual NONE	MODER	---	---
Sand/Dirt scalar	*Visual NONE	NONE	---	---
Appearance scalar	*Visual NORML	NORML	---	---
Odor scalar	*Visual NORML	NORML	---	---
Emulsified Water scalar	*Visual >0.05	NEG	---	---
Free Water scalar	*Visual	NEG	---	---







OIL ANALYSIS REPORT

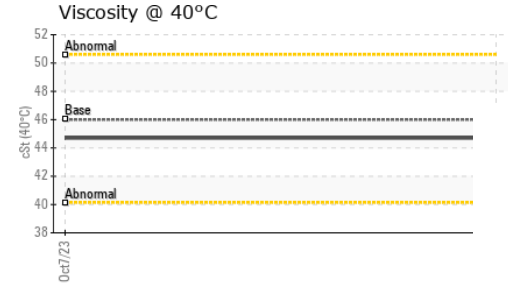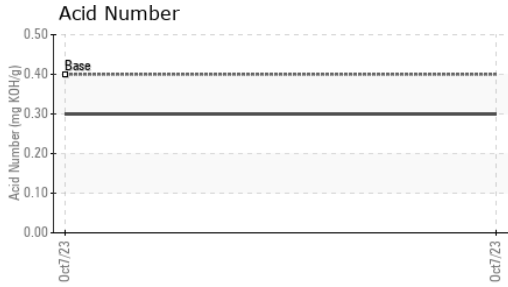

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

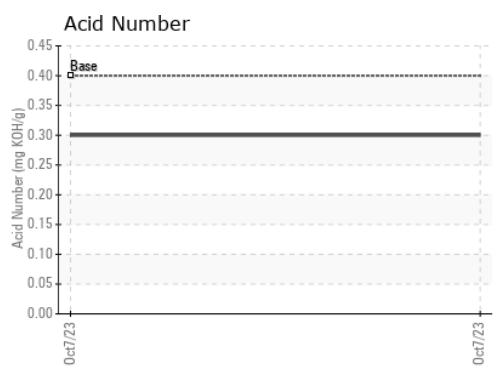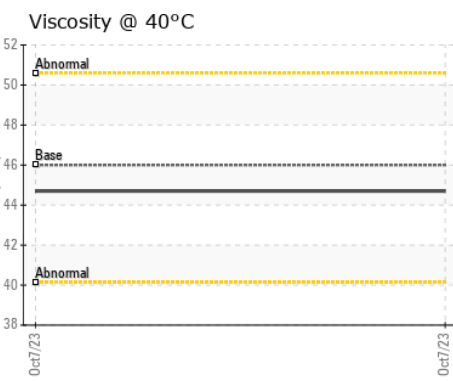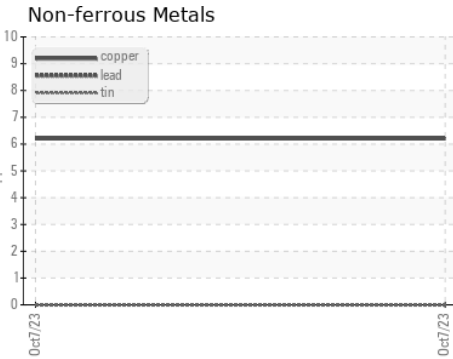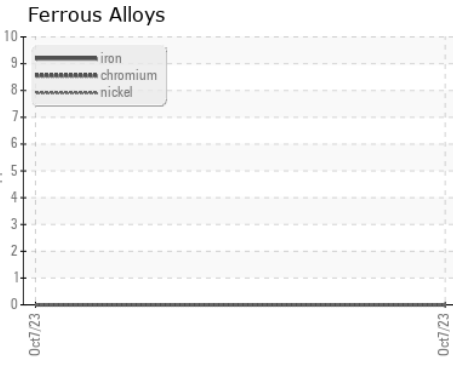

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCH05982452 **Received** : 18 Oct 2023
Lab Number : **05982452** **Diagnosed** : 24 Oct 2023
Unique Number : 10699747 **Diagnostician** : Angela Borella
Test Package : IND 2

DELTA INDUSTRIES - DOWNERS GROVE
 2201 CURTISS STREET
 DOWNERS GROVE, IL
 US 60515
 Contact: MICHAEL FERRIS

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (630)960-3931