PROBLEM SUMMARY

Sample Rating Trend

WEAR

Area
DPO [6815]
Machine Id
KAESER 1778 - STAMPEDE MEAT
Component
Compressor

COMPONENT CONDITION SUMMARY

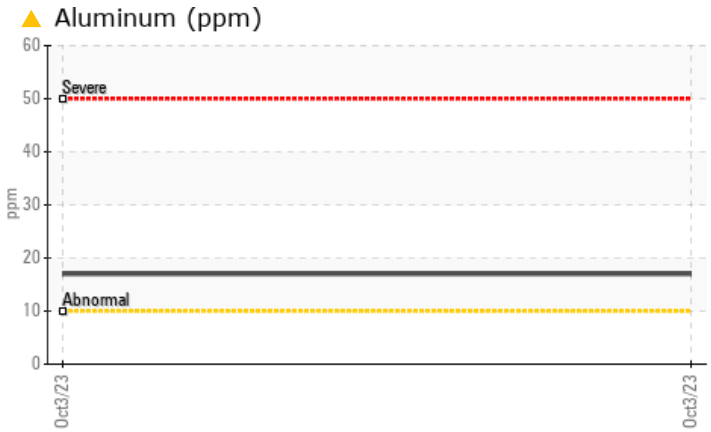

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				**ATTENTION**	---	---
Aluminum	ppm	ASTM D5185m	>10	▲ **17**	---	---

Customer Id: UCDELDOW
Sample No.: UCH05982464
Lab Number: 05982464
Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldridge +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Area
DPO [6815]
Machine Id
KAESER 1778 - STAMPEDE MEAT
Component
Compressor

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is a moderate amount of visible silt present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**UCH05982464**	---	---
Sample Date		Client Info		**03 Oct 2023**	---	---
Machine Age	hrs	Client Info		**71311**	---	---
Oil Age	hrs	Client Info		**550**	---	---
Oil Changed		Client Info		**Changed**	---	---
Sample Status				**ATTENTION**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	**1**	---	---
Chromium	ppm	ASTM D5185m	>10	**0**	---	---
Nickel	ppm	ASTM D5185m	>3	**0**	---	---
Titanium	ppm	ASTM D5185m	>3	**0**	---	---
Silver	ppm	ASTM D5185m	>2	**0**	---	---
Aluminum	ppm	ASTM D5185m	>10	▲ **17**	---	---
Lead	ppm	ASTM D5185m	>10	**0**	---	---
Copper	ppm	ASTM D5185m	>50	**38**	---	---
Tin	ppm	ASTM D5185m	>10	**0**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0.1	**0**	---	---
Barium	ppm	ASTM D5185m	0.8	**0**	---	---
Molybdenum	ppm	ASTM D5185m	0	**0**	---	---
Manganese	ppm	ASTM D5185m	0.9	**<1**	---	---
Magnesium	ppm	ASTM D5185m	0	**0**	---	---
Calcium	ppm	ASTM D5185m	0	**0**	---	---
Phosphorus	ppm	ASTM D5185m	409	**81**	---	---
Zinc	ppm	ASTM D5185m	0	**94**	---	---
Sulfur	ppm	ASTM D5185m	1290	**3427**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	**<1**	---	---
Sodium	ppm	ASTM D5185m		**2**	---	---
Potassium	ppm	ASTM D5185m	>20	**0**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.537	**0.31**	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**MODER**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.05	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

OIL ANALYSIS REPORT

Aluminum (ppm)

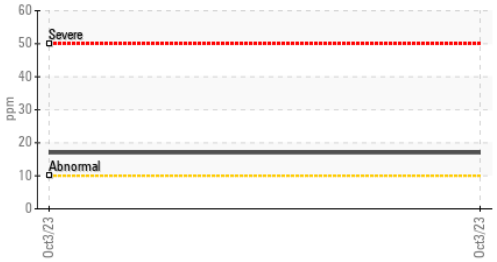

Acid Number

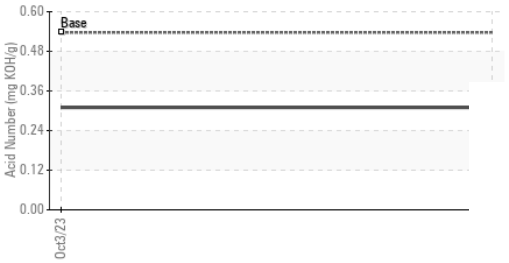

Viscosity @ 40°C

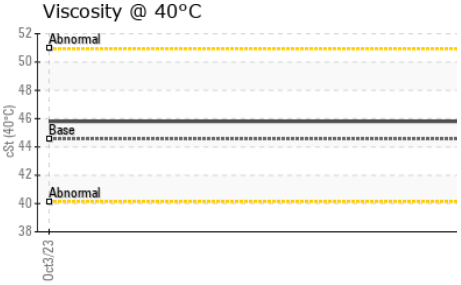

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.56	**45.8**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

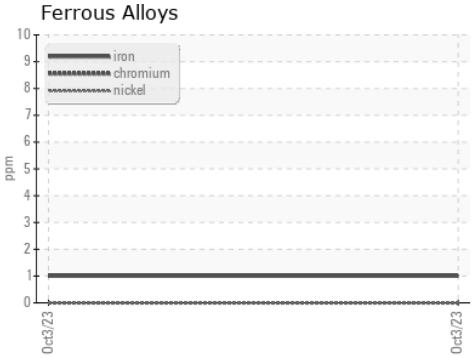

Non-ferrous Metals

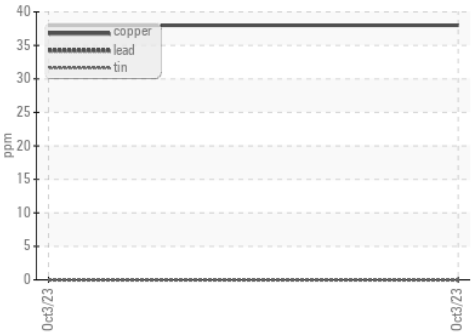

Viscosity @ 40°C

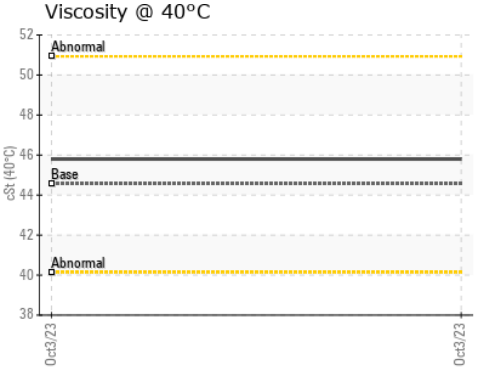

Acid Number

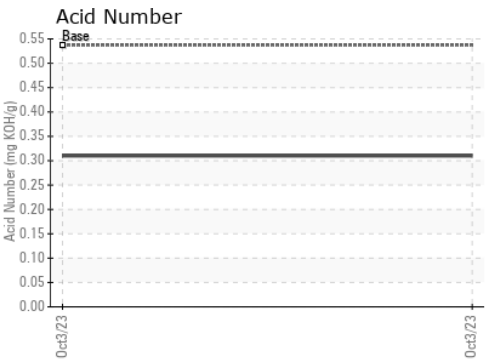

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCH05982464
Lab Number : 05982464
Unique Number : 10699759
Test Package : IND 2

Received : 18 Oct 2023
Diagnosed : 20 Oct 2023
Diagnostician : Don Baldridge

DELTA INDUSTRIES - DOWNERS GROVE
2201 CURTISS STREET
DOWNERS GROVE, IL
US 60515
Contact: MICHAEL FERRIS
T:
F: (630)960-3931

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)