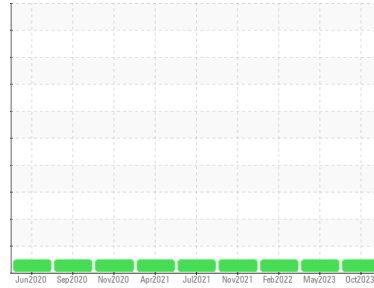


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
[W47062]
 Machine Id
JOHN DEERE 750K 1T0750KXEJF332859
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HYDRAU (--- GAL)


DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0179384	JR0164566	JR0106765
Sample Date	Client Info		10 Oct 2023	05 May 2023	08 Feb 2022
Machine Age	hrs	Client Info	4507	3992	3495
Oil Age	hrs	Client Info	0	0	1500
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>95	13	7	19
Iron	ppm	ASTM D5185m	>200	3	11
Chromium	ppm	ASTM D5185m	>5	0	0
Nickel	ppm	ASTM D5185m	>5	0	<1
Titanium	ppm	ASTM D5185m		0	0
Silver	ppm	ASTM D5185m	>7	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0
Lead	ppm	ASTM D5185m	>45	0	0
Copper	ppm	ASTM D5185m	>225	2	7
Tin	ppm	ASTM D5185m	>10	0	0
Antimony	ppm	ASTM D5185m		---	<1
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1
Barium	ppm	ASTM D5185m		<1	0
Molybdenum	ppm	ASTM D5185m		0	<1
Manganese	ppm	ASTM D5185m		0	<1
Magnesium	ppm	ASTM D5185m		6	0
Calcium	ppm	ASTM D5185m	87	89	92
Phosphorus	ppm	ASTM D5185m	727	641	634
Zinc	ppm	ASTM D5185m	900	815	828
Sulfur	ppm	ASTM D5185m	1500	1541	1889



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	0	<1
Sodium	ppm	ASTM D5185m		0	<1
Potassium	ppm	ASTM D5185m	>20	0	<1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

OIL ANALYSIS REPORT

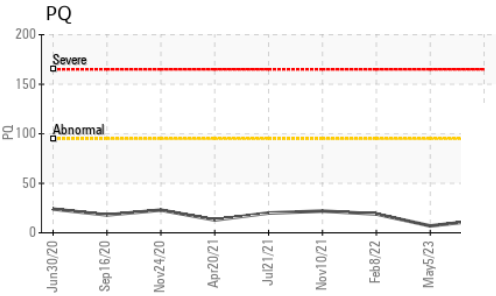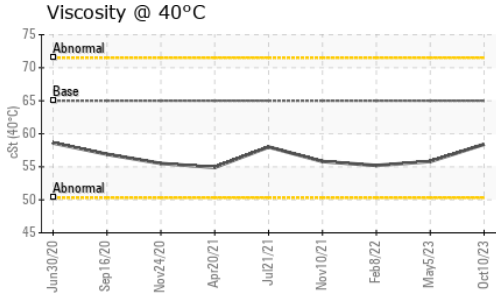




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 65	58.4	55.8	55.2

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

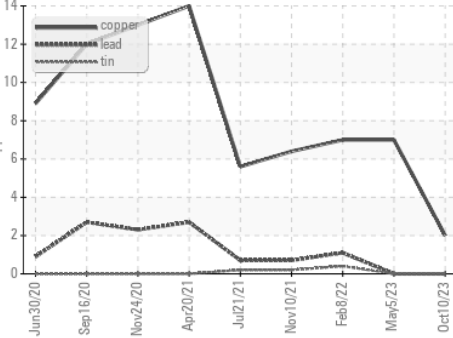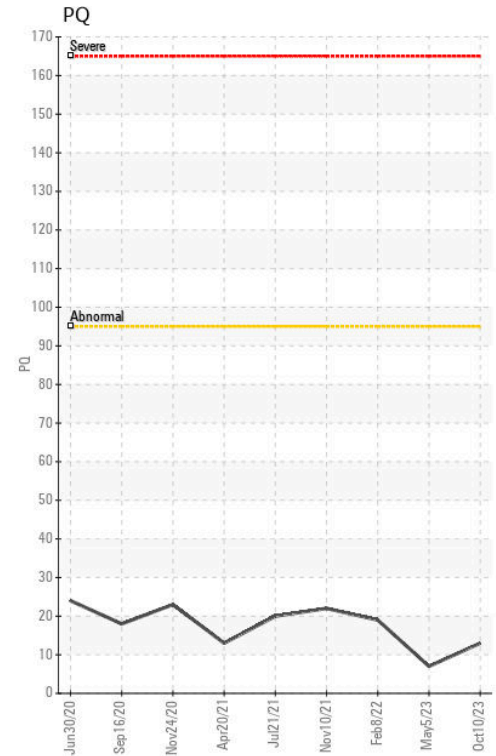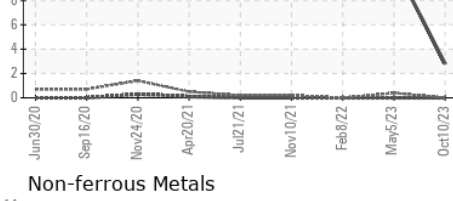

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0179384 **Received** : 18 Oct 2023
Lab Number : 05982545 **Diagnosed** : 19 Oct 2023
Unique Number : 10699840 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292