




# OIL ANALYSIS REPORT

Sample Rating Trend

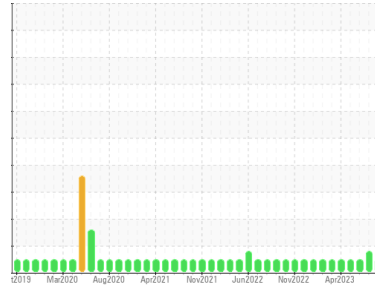

**NORMAL**



Area  
**SALLY BROMFIELD**  
 Machine Id  
**[SALLY BROMFIELD] 003 501709-3**  
 Component  
**Starboard Main Engine**  
 Fluid  
**CHEVRON DELO 710 LE (320 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>MW0018044</b>   | MW0052597   | MW0052447   |
| Sample Date        | Client Info |             |            | <b>20 Oct 2023</b> | 01 Oct 2023 | 01 Jun 2023 |
| Machine Age        | hrs         | Client Info |            | <b>29920</b>       | 29455       | 29324       |
| Oil Age            | hrs         | Client Info |            | <b>8195</b>        | 7730        | 7599        |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Not Changd  | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ABNORMAL    | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method |        | >4.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current   | history1 | history2 |
|-------------|-----|-------------|------------|-----------|----------|----------|
| Iron        | ppm | ASTM D5185m | >75        | <b>14</b> | 16       | 14       |
| Chromium    | ppm | ASTM D5185m | >8         | <b>1</b>  | 1        | 1        |
| Nickel      | ppm | ASTM D5185m | >2         | <b>0</b>  | <1       | 0        |
| Titanium    | ppm | ASTM D5185m | >3         | <b>0</b>  | <1       | 0        |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>  | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >15        | <b>2</b>  | 2        | 1        |
| Lead        | ppm | ASTM D5185m | >18        | <b>4</b>  | ▲ 33     | 3        |
| Copper      | ppm | ASTM D5185m | >80        | <b>16</b> | 40       | 14       |
| Tin         | ppm | ASTM D5185m | >14        | <b>3</b>  | 6        | 3        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>  | <1       | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>  | <1       | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>40</b>    | 52       | 48       |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>     | 3        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>48</b>    | 47       | 49       |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m |            | <b>18</b>    | 19       | 17       |
| Calcium    | ppm | ASTM D5185m |            | <b>3437</b>  | 3547     | 3943     |
| Phosphorus | ppm | ASTM D5185m |            | <b>20</b>    | 12       | 12       |
| Zinc       | ppm | ASTM D5185m | 10         | <b>21</b>    | 22       | <1       |
| Sulfur     | ppm | ASTM D5185m |            | <b>2231</b>  | 2657     | 3017     |



| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >20        | <b>4</b> | 4        | 4        |
| Sodium       | ppm | ASTM D5185m | >75        | <b>3</b> | 7        | 1        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>2</b> | 5        | 1        |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 |            | <b>0.3</b>  | 0.4      | 0.4      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>8.8</b>  | 19.4     | 9.5      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>17.0</b> | 6.0      | 17.5     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>9.3</b>  | 14.6     | 10.0     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 9.2        | <b>9.94</b> | 8.97     | 10.59    |







# OIL ANALYSIS REPORT

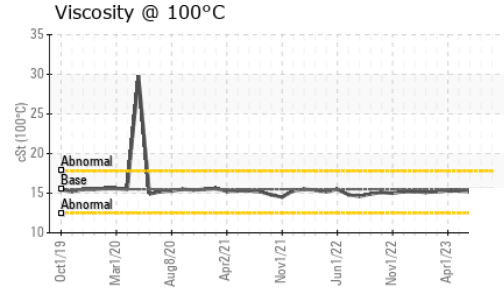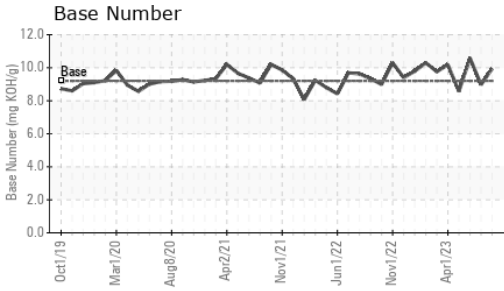

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.5    | 15.1     | 13.7     |

## GRAPHS

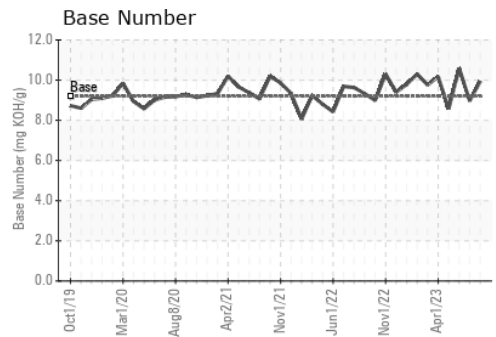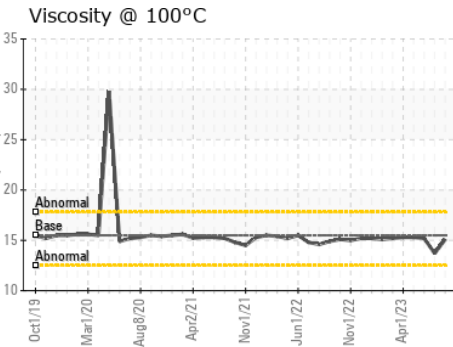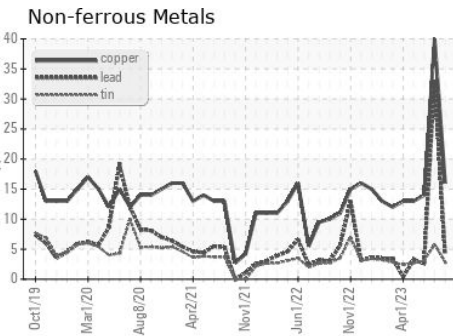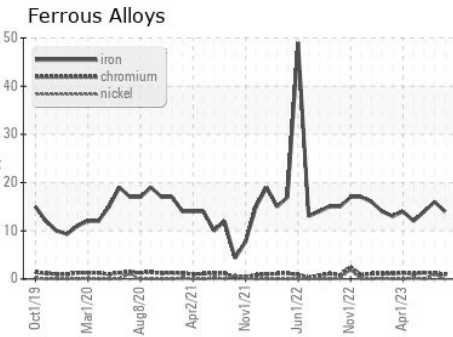

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0018044 **Received** : 30 Oct 2023  
**Lab Number** : 05993760 **Diagnosed** : 31 Oct 2023  
**Unique Number** : 10722120 **Diagnostician** : Wes Davis  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003  
 Contact: GLENN ELLIS  
 glen.ellis@ingrambarge.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)