



# PROBLEM SUMMARY

Sample Rating Trend

**WEAR**



Machine Id  
**201502 - GENIE 60` MANLIFT (S/N S60TX15A-31093)**


Component  
**Rear Left Final Drive**

Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)**



## COMPONENT CONDITION SUMMARY

### Non-ferrous Metals

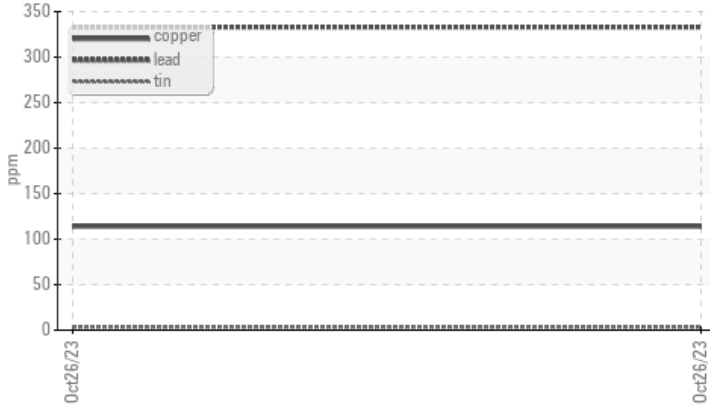

### Ferrous Alloys



## RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Iron	ppm	ASTM D5185m	>500	▲ 589	---	---
Lead	ppm	ASTM D5185m	>25	● 333	---	---
Copper	ppm	ASTM D5185m	>50	▲ 114	---	---

Customer Id: CONLINNE  
 Sample No.: SBP0004873  
 Lab Number: 05993835  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Sean Felton +1 919-379-4092  
[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Inspect Wear Source	---	---	?	We advise that you inspect for the source(s) of wear.
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id  
**201502 - GENIE 60` MANLIFT (S/N S60TX15A-31093)**

Component  
**Rear Left Final Drive**

Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)**



## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

### Wear

Bearing and/or bushing wear is indicated. Gear wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0004873</b>	---	---
Sample Date	Client Info		<b>26 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>3159</b>	---	---
Oil Age	hrs	Client Info	<b>1000</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>▲ 589</b>	---
Chromium	ppm	ASTM D5185m	>10	<b>8</b>	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Silver	ppm	ASTM D5185m		<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	---
Lead	ppm	ASTM D5185m	>25	<b>● 333</b>	---
Copper	ppm	ASTM D5185m	>50	<b>▲ 114</b>	---
Tin	ppm	ASTM D5185m	>10	<b>3</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	<b>15</b>	---
Barium	ppm	ASTM D5185m	1	<b>35</b>	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---
Manganese	ppm	ASTM D5185m		<b>13</b>	---
Magnesium	ppm	ASTM D5185m	1	<b>9</b>	---
Calcium	ppm	ASTM D5185m	7	<b>21</b>	---
Phosphorus	ppm	ASTM D5185m	1145	<b>252</b>	---
Zinc	ppm	ASTM D5185m	3	<b>121</b>	---
Sulfur	ppm	ASTM D5185m	17909	<b>12538</b>	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>43</b>	---
Sodium	ppm	ASTM D5185m		<b>6</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---


## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	99.6	<b>140</b>	---



# OIL ANALYSIS REPORT


### Non-ferrous Metals

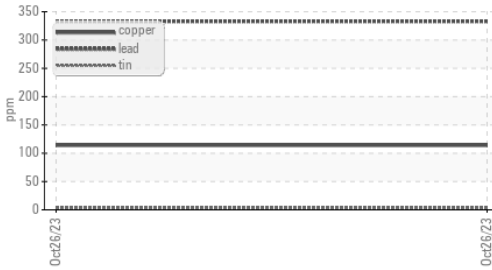


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS


### Ferrous Alloys

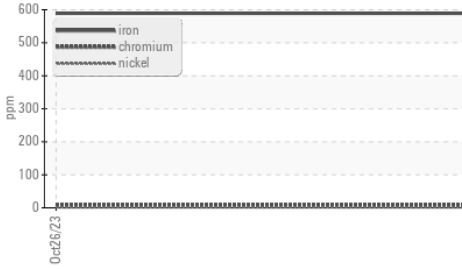


### Ferrous Alloys

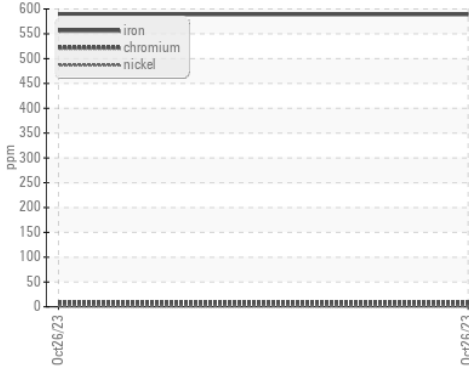


### Viscosity @ 40°C

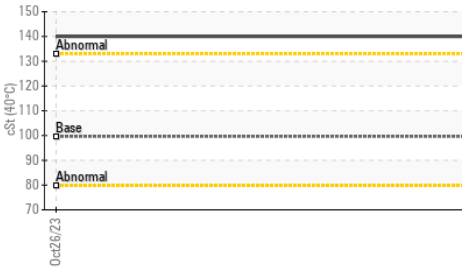

### Non-ferrous Metals

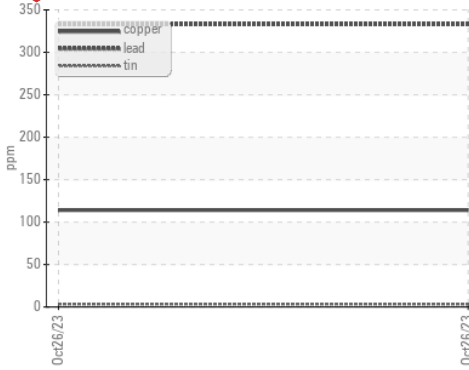

### Viscosity @ 40°C

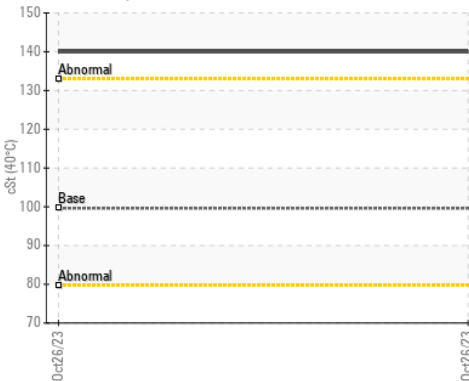

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004873     **Received** : 30 Oct 2023  
**Lab Number** : 05993835     **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10722195     **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508

Contact: Jack Linhart  
 jackl@constructorslincoln.com

T: (402)434-2157  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)