




PROBLEM SUMMARY



Area
OKLAHOMA/102/EG - SKID STEER
 Machine Id
53.180L [OKLAHOMA^102^EG - SKID STEER]
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

Sample Rating Trend

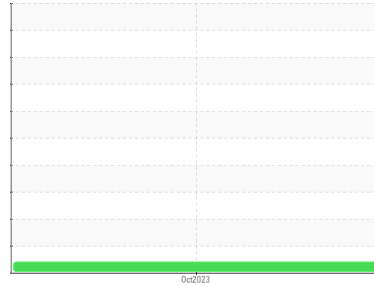

VISCOSITY



COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C



RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.4	---	---

Customer Id: SHEWIC
 Sample No.: WC0862642
 Lab Number: 05994057
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Area
OKLAHOMA/102/EG - SKID STEER
 Machine Id
53.180L [OKLAHOMA^102^EG - SKID STEER]
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

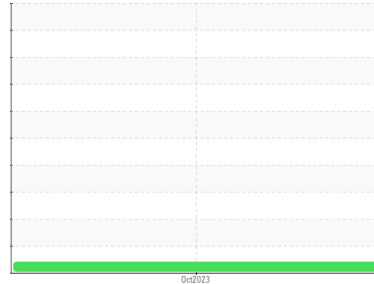

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0862642	---	---
Sample Date	Client Info	23 Oct 2023	---	---
Machine Age	hrs	Client Info	4	---
Oil Age	hrs	Client Info	4	---
Oil Changed	Client Info	Not Changed	---	---
Sample Status		ATTENTION	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	2	---
Chromium	ppm	ASTM D5185m >20	0	---
Nickel	ppm	ASTM D5185m >2	0	---
Titanium	ppm	ASTM D5185m >2	0	---
Silver	ppm	ASTM D5185m >2	0	---
Aluminum	ppm	ASTM D5185m >25	2	---
Lead	ppm	ASTM D5185m >40	0	---
Copper	ppm	ASTM D5185m >330	6	---
Tin	ppm	ASTM D5185m >15	0	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	64	---
Barium	ppm	ASTM D5185m 10	<1	---
Molybdenum	ppm	ASTM D5185m 100	35	---
Manganese	ppm	ASTM D5185m	2	---
Magnesium	ppm	ASTM D5185m 450	430	---
Calcium	ppm	ASTM D5185m 3000	1610	---
Phosphorus	ppm	ASTM D5185m 1150	945	---
Zinc	ppm	ASTM D5185m 1350	1036	---
Sulfur	ppm	ASTM D5185m 4250	2925	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	---
Sodium	ppm	ASTM D5185m >158	4	---
Potassium	ppm	ASTM D5185m >20	4	---
Fuel	%	ASTM D3524 >5	0.1	---

INFRA-RED




method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0	---
Nitration	Abs/cm	*ASTM D7624 >20	4.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.8	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.1	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	10.2	---







OIL ANALYSIS REPORT

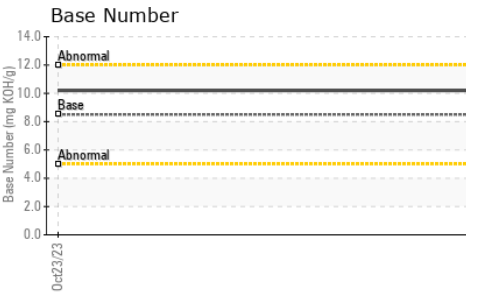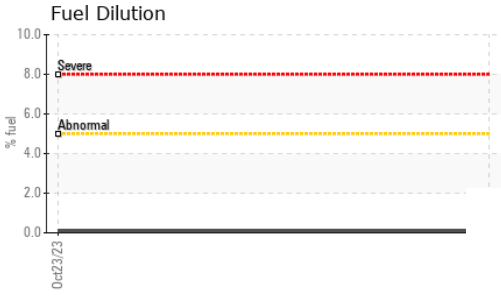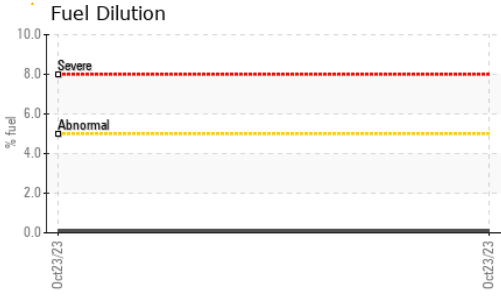

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.4	---	---

GRAPHS

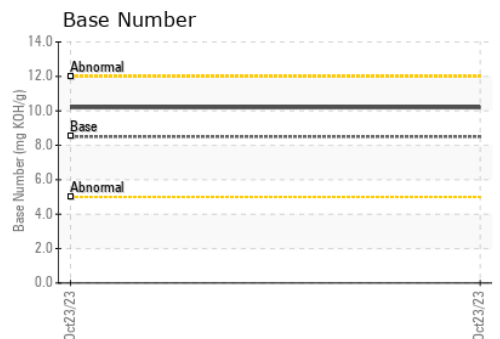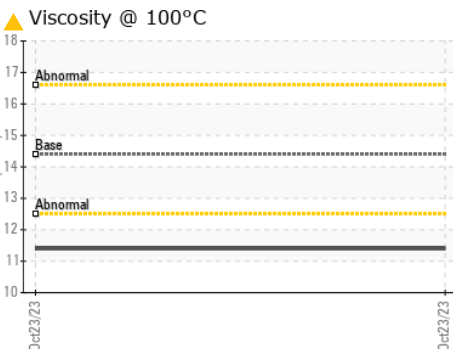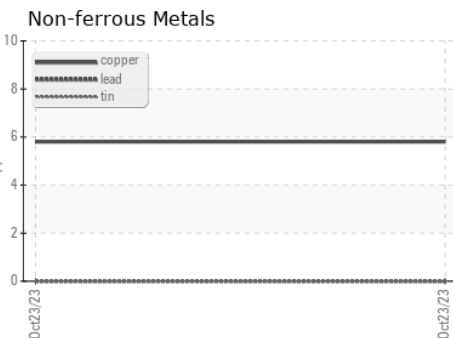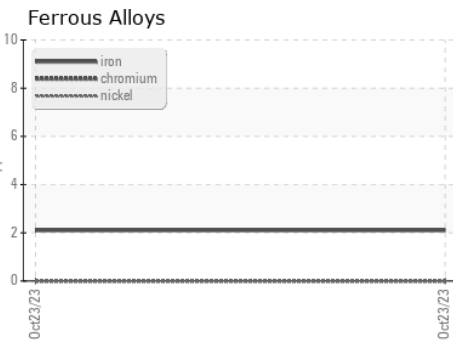

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0862642 **Received** : 31 Oct 2023
Lab Number : 05994057 **Diagnosed** : 03 Nov 2023
Unique Number : 10722417 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: BILL ORCUTT
 william.orcutt@wildcat.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: