



# PROBLEM SUMMARY

Sample Rating Trend


**WATER**

Area  
**MIXING**  
 Machine Id  
**[MIXING] HYDR\_003 HYDRAULIC UNIT (MIXER\_003A) MIX\_003**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 10 EXCEL 46 (800 LTR)**



## COMPONENT CONDITION SUMMARY

▲ Water (KF)

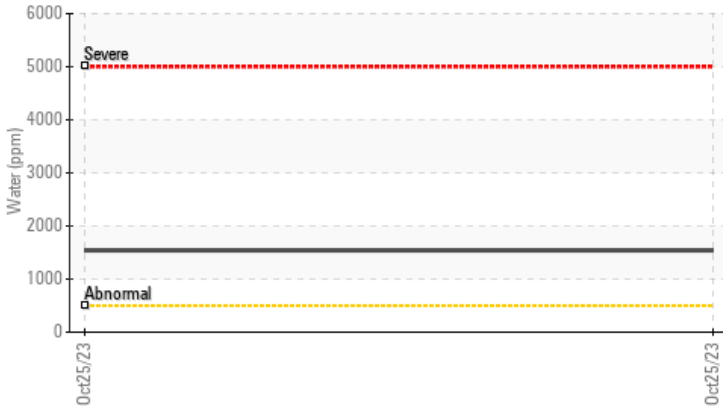

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Water	%	ASTM D6304	>0.05	▲ <b>0.154</b>	---	---
ppm Water	ppm	ASTM D6304	>500	▲ <b>1540</b>	---	---

Customer Id: NOKDAY  
 Sample No.: WC0849604  
 Lab Number: 05994310  
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

**WATER**

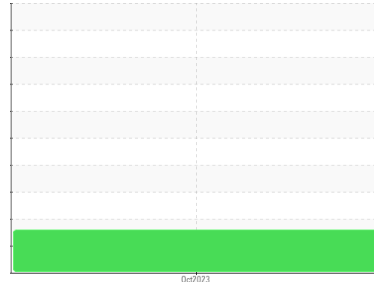

Area  
**MIXING**  
 Machine Id  
**[MIXING] HYDR\_003 HYDRAULIC UNIT (MIXER\_003A) MIX\_003**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 10 EXCEL 46 (800 LTR)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0849604</b>	---	---
Sample Date	Client Info	<b>25 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>5</b>	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---
Silver	ppm	ASTM D5185m	<b>0</b>	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	---
Copper	ppm	ASTM D5185m >20	<b>1</b>	---
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---
Barium	ppm	ASTM D5185m	<b>20</b>	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	---
Calcium	ppm	ASTM D5185m	<b>75</b>	---
Phosphorus	ppm	ASTM D5185m	<b>461</b>	---
Zinc	ppm	ASTM D5185m	<b>69</b>	---
Sulfur	ppm	ASTM D5185m	<b>1980</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>2</b>	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---
Water	%	ASTM D6304 >0.05	<b>▲ 0.154</b>	---
ppm Water	ppm	ASTM D6304 >500	<b>▲ 1540</b>	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>3180</b>	---
Particles >6µm	ASTM D7647	>1300	<b>406</b>	---
Particles >14µm	ASTM D7647	>160	<b>26</b>	---
Particles >21µm	ASTM D7647	>40	<b>6</b>	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/16/12</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.09</b>	---



# OIL ANALYSIS REPORT

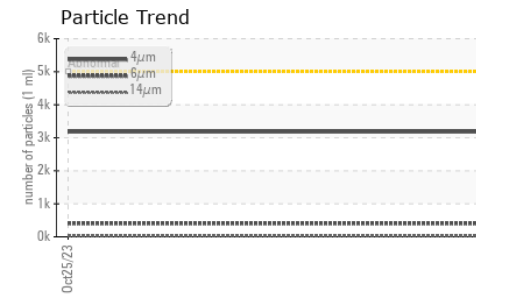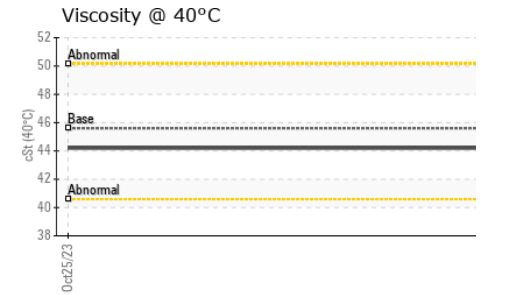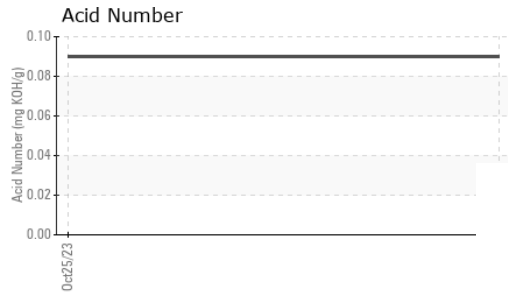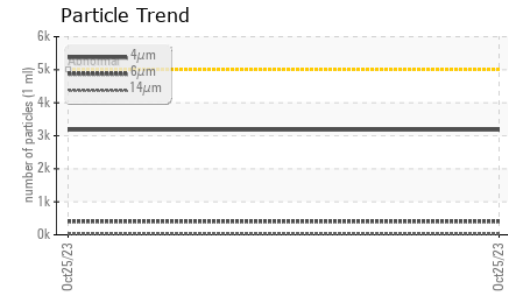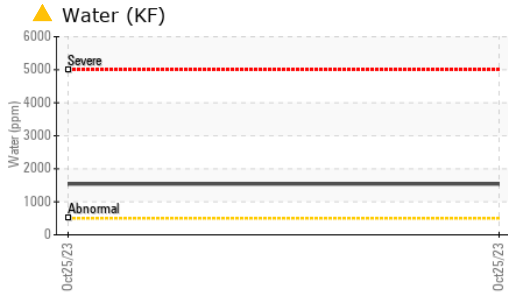





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	0.2%	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.6	44.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

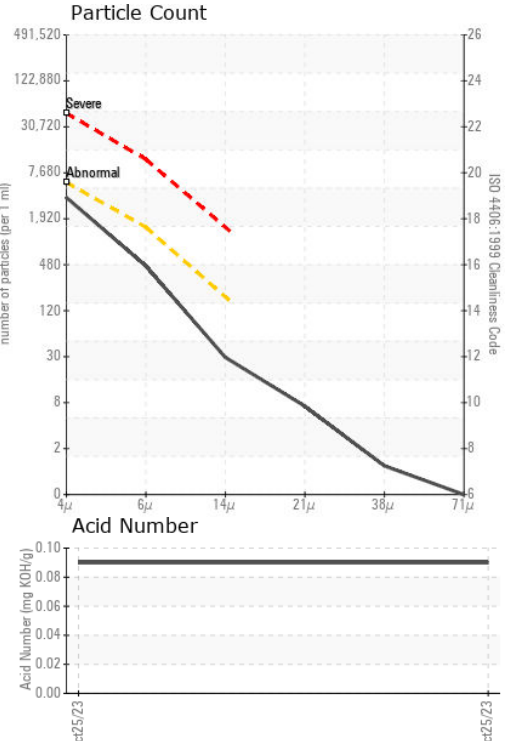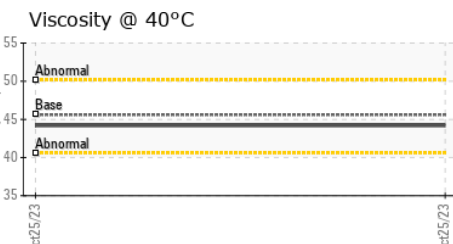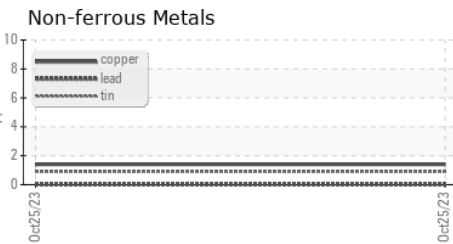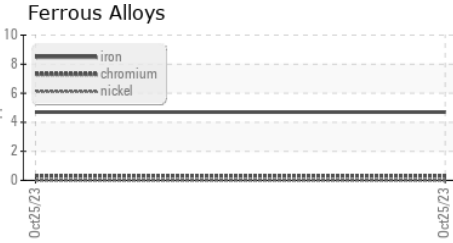

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0849604 **Received** : 31 Oct 2023  
**Lab Number** : 05994310 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10722670 **Diagnostician** : Jonathan Hester  
**Test Package** : PLANT

**NOKIAN TYRES US OPERATIONS LLC**  
 520 NOKIAN TYRES DRIVE  
 DAYTON, TN  
 US 37321  
 Contact: CHRIS NAPIER  
 christopher.napier@nokiantyres.com  
 T: (423)457-3121  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)