


PROBLEM SUMMARY




KAESER 5907651 (S/N 1999)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

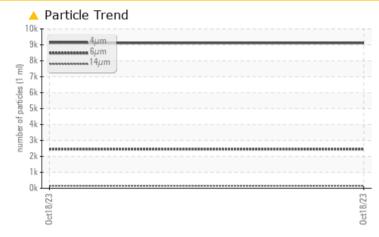

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | ATTENTION | |
|-----------------|----------------------|-------------------|------|
| Particles >6µm | ASTM D7647 >1300 | 🔺 2456 | |
| Particles >14µm | ASTM D7647 >80 | 🔺 154 | |
| Particles >21µm | ASTM D7647 >20 | <u> </u> | |
| Oil Cleanliness | ISO 4406 (c) >/17/13 | A 20/18/14 | |

Customer Id: TOMRED Sample No.: KCPA007667 Lab Number: 05994367 Test Package: IND 2



To manage this report scan the QR code


To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

KAESER 5907651 (S/N 1999)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|--|--------|--|------------------------|---|----------|----------|
| Sample Number | | Client Info | | KCPA007667 | | |
| Sample Date | | Client Info | | 18 Oct 2023 | | |
| Machine Age | hrs | Client Info | | 12167 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ATTENTION | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >3 | 0 | | |
| Titanium | ppm | ASTM D5185m | >3 | 0 | | |
| Silver | ppm | ASTM D5185m | >2 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | | |
| Lead | ppm | ASTM D5185m | >10 | 0 | | |
| Copper | ppm | | >50 | 8 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | 210 | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | | |
| Barium | ppm | ASTM D5185m | 90 | 20 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | 100 | 9 | | |
| Calcium | ppm | ASTM D5185m | 0 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | 0 | 36 | | |
| Zinc | ppm | ASTM D5185m | 0 | 36 | | |
| Sulfur | ppm | ASTM D5185m | 23500 | 26925 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | | |
| Sodium | ppm | ASTM D5185m | | 4 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| Water | % | ASTM D6304 | >0.05 | 0.009 | | |
| ppm Water | ppm | ASTM D6304 | >500 | 99.9 | | |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| I LOID GLEANLIN | | | | | | |
| Particles >4µm | | ASTM D7647 | | 9116 | | |
| Particles >4µm | | ASTM D7647 ASTM D7647 | >1300 | 9116 2456 | | |
| Particles >4μm Particles >6μm | | | >1300 >80 | | | |
| Particles >4μm Particles >6μm Particles >14μm | | ASTM D7647 | >80 | <u> </u> | | |
| Particles >4μm Particles >6μm Particles >14μm Particles >21μm | | ASTM D7647 ASTM D7647 | >80 | ▲ 2456 ▲ 154 | | |
| Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm Particles >71μm | | ASTM D7647 ASTM D7647 ASTM D7647 | >80 >20 >4 | ▲ 2456 ▲ 154 ▲ 40 | | |
| Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | | ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >80 >20 >4 | 2456 154 40 2 | | |
| Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm | TION | ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >80 >20 >4 >3 | 2456 154 40 2 0 | | |





Built for a lifetime

OIL ANALYSIS REPORT





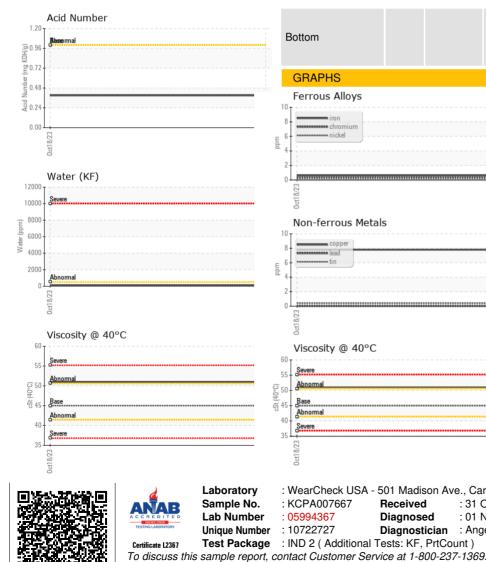

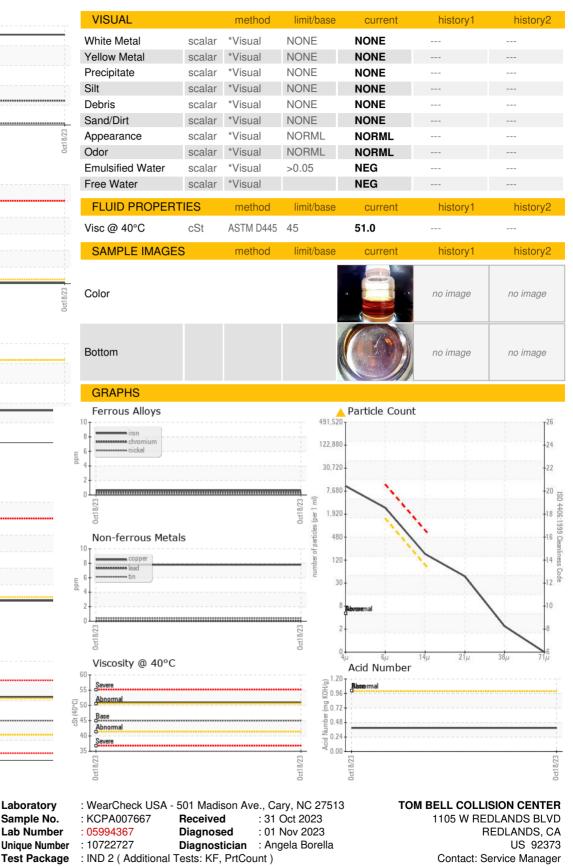

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: