

# **PROBLEM SUMMARY**


# KAESER AIR CENTER SM 15 5588077 (S/N 1599)

Compressor



# KAESER SIGMA (OEM) S-460 (--- GAL)

# COMPONENT CONDITION SUMMARY

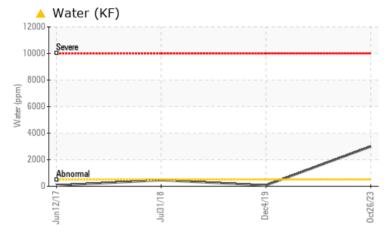

## RECOMMENDATION

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	ATTENTION	SEVERE	
Water	%	ASTM D6304	>0.05	<b>6.300</b>	0.006	0.046	
ppm Water	ppm	ASTM D6304	>500	🔺 2997	68.6	460	
Emulsified Water	scalar	*Visual	>0.05	<b> 0.2%</b>	NEG	NEG	

Customer Id: CANGAI Sample No.: KC05994385 Lab Number: 05994385 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

# 04 Dec 2019 Diag: Don Baldridge



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 31 Jul 2018 Diag: Angela Borella



#### or Jul 2016 Diag. Aligela Borella

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable due to the presence of contaminants.





12 Jun 2017 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

# KAESER AIR CENTER SM 15 5588077 (S/N 1599)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

# DIAGNOSIS

## Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

## Wear


All component wear rates are normal.

## Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

# Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

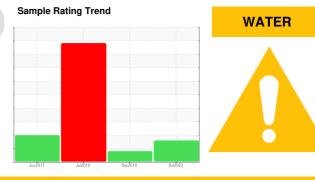



SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC05994385	KC04869622	KC04537735
Sample Date		Client Info		26 Oct 2023	04 Dec 2019	31 Jul 2018
Machine Age	hrs	Client Info		21474	11413	7545
Oil Age	hrs	Client Info		0	3868	3770
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ATTENTION	SEVERE
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	<1	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm		>50	2	23	28
Tin	ppm	ASTM D5185m	>10	- <1	<1	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm			-	-	-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m	90	26	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	38	0	0
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		98	2	2
Zinc	ppm	ASTM D5185m		66	0	<1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		10	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.05	<b>A</b> 0.300	0.006	0.046
ppm Water	ppm	ASTM D6304	>500	<u> </u>	68.6	460
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		835	2060	138446
Particles >6µm		ASTM D7647	>1300	455	699	<b>72519</b>
Particles >14µm		ASTM D7647	>80	77	<b>A</b> 83	15244
Particles >21µm		ASTM D7647	>20	26	<b>A</b> 31	<b>5</b> 294
Particles >38µm		ASTM D7647	>4	4	2	254
Particles >71µm		ASTM D7647	>3	0	0	<b></b> 7
Oil Cleanliness		ISO 4406 (c)	>17/13	16/13	▲ 17/14	23/21
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.352	0.452



# **OIL ANALYSIS REPORT**

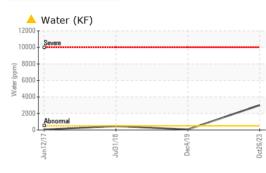

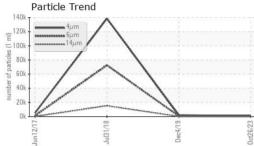

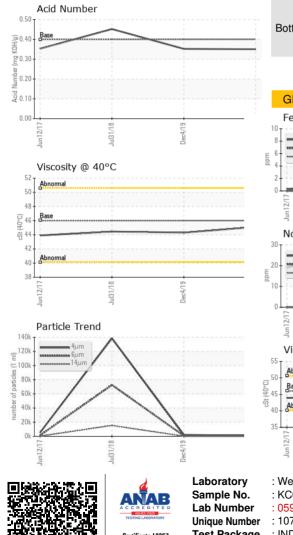



Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>6.2%</b>	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.1	44.3	44.45
SAMPLE IMAGES me		method	limit/base	current	history1	history2

Color



history2

NONE


NONE

NONE

NONE

A MODER

Bottom

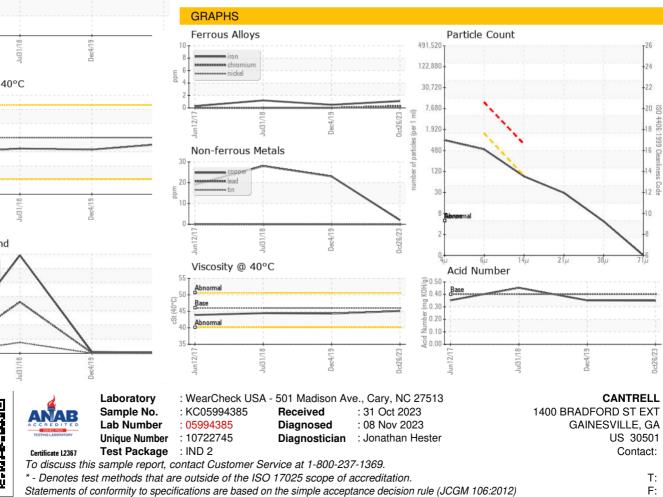

Report Id: CANGAI [WUSCAR] 05994385 (Generated: 11/08/2023 09:19:55) Rev: 1

Contact/Location: ? ? - CANGAI

Page 4 of 4