

PROBLEM SUMMARY

Sample Rating Trend

HOMOGENIZER 8NA

Component Gearbox

Fluid PETRO CANADA PURITY FG SYNTH EP GEAR 220 (--- LTR)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TES	T RESULTS			
Sample Status			ABNORMAL	
Particles >4µm	ASTM D7647	>10000	40865	
Oil Cleanliness	ISO 4406 (c)	>20/18/16	A 23/18/11	

Customer Id: KRAMASIOW Sample No.: USP0002928 Lab Number: 05994414 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



Gearbox

Fluid PETRO CANADA PURITY FG SYNTH EP GEAR 220 (--- LTR)

DIAGNOSIS	SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
A Recommendation	Sample Number		Client Info		USP0002928		
Resample at the next service interval to monitor.	Sample Date		Client Info		26 Oct 2023		
Wear	Machine Age	hrs	Client Info		0		
All component wear rates are normal.	Oil Age	hrs	Client Info		0		
Contamination	Oil Changed		Client Info		N/A		
There is a high amount of silt (particulates < 6	Sample Status				ABNORMAL		
microns in size) present in the oil. Fluid Condition	WEAR METALS		method	limit/base	current	history1	history2
The AN level is acceptable for this fluid. The	Iron	ppm	ASTM D5185m	>200	<1		
condition of the oil is suitable for further service.	Chromium	ppm	ASTM D5185m	>15	<1		
	Nickel	ppm	ASTM D5185m	>15	0		
	Titanium	ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m	>25	<1		
	Lead	ppm	ASTM D5185m		4		
	Copper	ppm	ASTM D5185m		29		
	Tin	ppm	ASTM D5185m		3		
	Vanadium	ppm	ASTM D5185m		0		
	Cadmium	ppm	ASTM D5185m		0		
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		6		
	Barium	ppm	ASTM D5185m		20		
	Molybdenum	ppm	ASTM D5185m		<1		
	Manganese	ppm	ASTM D5185m		<1		
	Magnesium	ppm	ASTM D5185m		<1		
	Calcium	ppm	ASTM D5185m		0		
	Phosphorus	ppm	ASTM D5185m		386		
	Zinc	ppm	ASTM D5185m		25		
	Sulfur	ppm	ASTM D5185m		2409		
	CONTAMINANTS		method	limit/base		history1	history2
	Silicon		ASTM D5185m		2		
	Sodium	ppm	ASTM D5185m	>50	4		
	Potassium	ppm	ASTM D5185m	>20	4		
	Water	ppm %	ASTM D5185III ASTM D6304		0.024		
	ppm Water	ppm	ASTM D6304		240.5		
	FLUID CLEANLIN	VESS	method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647		40865		
	Particles >6µm		ASTM D7647	>2500	2366		
	Particles >14µm		ASTM D7647	>640	16		
	Particles >21µm		ASTM D7647	>160	3		
	Particles >38µm		ASTM D7647	>40	0		
	Particles >71µm		ASTM D7647	>10	0		
	Oil Cleanliness		ISO 4406 (c)		A 23/18/11		
	FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
	Acid Number (AN)	mg KOH/g	ASTM D8045	0.59	0.66		


Machine Id




ISO




OIL ANALYSIS REPORT

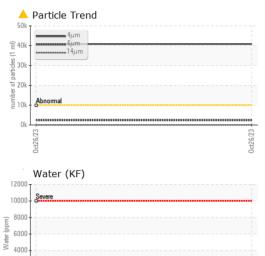



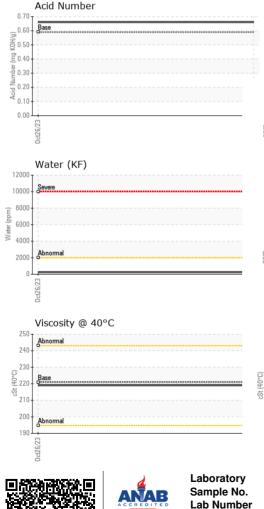

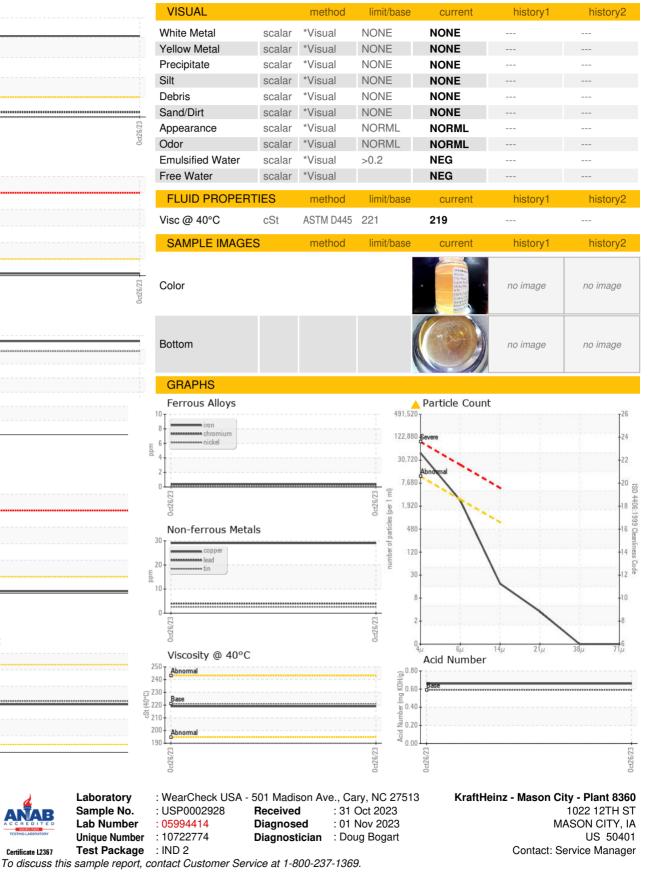

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - KRAMASIOW