


Machine Id MYCOM C07-1 (S/N 2535284) Component

Refrigeration Compressor Fluid FRICK COMPRESSOR OIL #3 (--- PNT)

## COMPONENT CONDITION SUMMARY

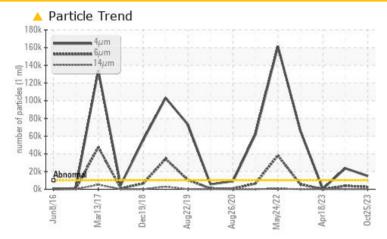

## RECOMMENDATION

Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |           |           |                  |          |  |  |  |
|--------------------------|--------------|-----------|-----------|------------------|----------|--|--|--|
| Sample Status            |              |           | ATTENTION | ABNORMAL         | ABNORMAL |  |  |  |
| Particles >4µm           | ASTM D7647   | >10000    | <u> </u>  | <b>2</b> 3641    | 577      |  |  |  |
| Particles >6µm           | ASTM D7647   | >2500     | 🔺 2570    | <b>A</b> 3771    | 123      |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >20/18/15 | <u> </u>  | <b>2</b> 2/19/14 | 16/14/11 |  |  |  |


Customer Id: PERPERUSP Sample No.: USP0002897 Lab Number: 05994459 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

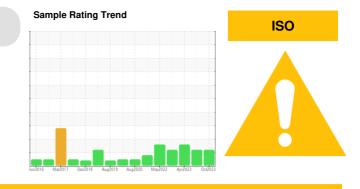

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 09 Jul 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

#### 18 Apr 2023 Diag: Doug Bogart

Resample at the next service interval to monitor.All component wear rates are normal. There is a light concentration of water present in the oil. Confirmed. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



30 Aug 2022 Diag: Doug Bogart

Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

#### Area ENGINE ROOM Machine Id MYCOM C07-1 (S/N 2535284) Component

Refrigeration Compressor

FRICK COMPRESSOR OIL #3 (--- PNT)

## DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

## Wear


All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

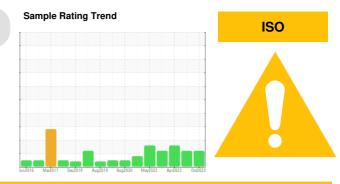

| SAMPLE INFORM    | MATION   | method       | limit/base | current           | history1         | history2     |
|------------------|----------|--------------|------------|-------------------|------------------|--------------|
| Sample Number    |          | Client Info  |            | USP0002897        | USP245931        | USP245946    |
| Sample Date      |          | Client Info  |            | 25 Oct 2023       | 09 Jul 2023      | 18 Apr 2023  |
| Machine Age      | hrs      | Client Info  |            | 29280             | 27969            | 27353        |
| Oil Age          | hrs      | Client Info  |            | 0                 | 0                | 0            |
| Oil Changed      |          | Client Info  |            | N/A               | Not Changd       | Not Changd   |
| Sample Status    |          |              |            | ATTENTION         | ABNORMAL         | ABNORMAL     |
| WEAR METALS      |          | method       | limit/base | current           | history1         | history2     |
| Iron             | ppm      | ASTM D5185m  | >8         | 7                 | 3                | 4            |
| Chromium         | ppm      | ASTM D5185m  | >2         | <1                | 0                | 0            |
| Nickel           | ppm      | ASTM D5185m  |            | 0                 | 0                | 0            |
| Titanium         | ppm      | ASTM D5185m  |            | <1                | <1               | 0            |
| Silver           | ppm      | ASTM D5185m  | >2         | 0                 | 0                | 0            |
| Aluminum         | ppm      | ASTM D5185m  | >3         | 0                 | 0                | 0            |
| Lead             | ppm      | ASTM D5185m  | >2         | 0                 | 0                | 0            |
| Copper           | ppm      | ASTM D5185m  |            | <1                | <1               | 0            |
| Tin              | ppm      | ASTM D5185m  | >4         | <1                | 0                | 0            |
| Vanadium         | ppm      | ASTM D5185m  |            | <1                | <1               | 0            |
| Cadmium          | ppm      | ASTM D5185m  |            | <1                | 0                | 0            |
| ADDITIVES        |          | method       | limit/base | current           | history1         | history2     |
| Boron            | ppm      | ASTM D5185m  |            | 0                 | 0                | 0            |
| Barium           | ppm      | ASTM D5185m  |            | 0                 | 0                | 0            |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0                 | 0                | 0            |
| Manganese        | ppm      | ASTM D5185m  |            | <1                | 0                | 0            |
| Magnesium        | ppm      | ASTM D5185m  |            | 0                 | 0                | 0            |
| Calcium          | ppm      | ASTM D5185m  |            | 1                 | 1                | <1           |
| Phosphorus       | ppm      | ASTM D5185m  |            | 0                 | 0                | 0            |
| Zinc             | ppm      | ASTM D5185m  |            | 1                 | 0                | 0            |
| Sulfur           | ppm      | ASTM D5185m  |            | 41                | 53               | 42           |
| CONTAMINANTS     | 6        | method       | limit/base | current           | history1         | history2     |
| Silicon          | ppm      | ASTM D5185m  | >15        | <1                | <1               | <1           |
| Sodium           | ppm      | ASTM D5185m  |            | 1                 | <1               | 0            |
| Potassium        | ppm      | ASTM D5185m  | >20        | <1                | 0                | 0            |
| Water            | %        | ASTM D6304   | >0.01      | 0.003             | 0.003            | ▲ 0.057      |
| ppm Water        | ppm      | ASTM D6304   | >100       | 27.0              | 26.8             | <b>▲</b> 570 |
| FLUID CLEANLIN   | IESS     | method       | limit/base | current           | history1         | history2     |
| Particles >4µm   |          | ASTM D7647   | >10000     | <b>A</b> 14912    | <b>2</b> 3641    | 577          |
| Particles >6µm   |          | ASTM D7647   | >2500      | <u> </u>          | <b>A</b> 3771    | 123          |
| Particles >14µm  |          | ASTM D7647   | >320       | 48                | 108              | 15           |
| Particles >21µm  |          | ASTM D7647   | >80        | 11                | 23               | 4            |
| Particles >38µm  |          | ASTM D7647   | >20        | 1                 | 1                | 0            |
| Particles >71µm  |          | ASTM D7647   | >4         | 0                 | 0                | 0            |
| Oil Cleanliness  |          | ISO 4406 (c) | >20/18/15  | <b>A</b> 21/19/13 | <b>2</b> 2/19/14 | 16/14/11     |
| FLUID DEGRADA    | ATION    | method       | limit/base | current           | history1         | history2     |
| Acid Number (AN) | mg KOH/g | ASTM D974    |            | 0.014             | 0.014            | 0.014        |





Acid Number

0.02

(B/HO)


# **OIL ANALYSIS REPORT**

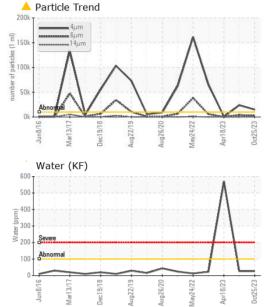

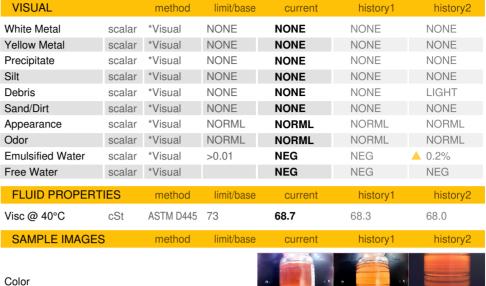



Bottom

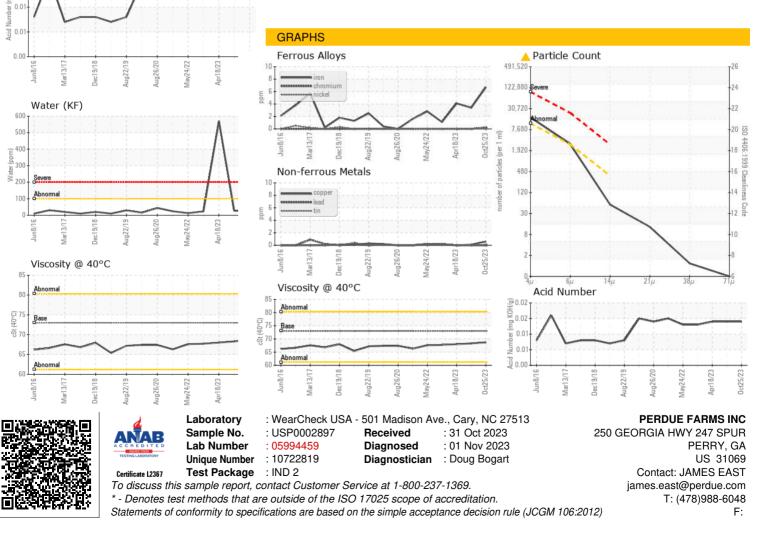

Contact/Location: JAMES EAST - PERPERUSP